


Lamp Type	# of Lamps	Lamp Watts	Input Volts	Catalog #	Input Current (Amps)	Input Power (Watts)	Power Factor	THD (%)	Ballast Factor	Starting Method	Wiring Diagram	Dim.	Warranty
F15T8	1	15	120	120TP	0.63	31	>0.40	<10	1.00	Trigger	4	D1	3
	2		120	220TP	0.65	35	>0.45	<20	0.70	Trigger	5	C1	3
F14T12	1	14	120	120TP	0.69	29	>0.35	<10	0.93	Trigger	4	D1	3
F15T12	1	15	120	120TP	0.63	31	>0.40	<10	1.00	Trigger	4	D1	3
	2		120	220TP	0.65	35	>0.45	<20	0.70	Trigger	5	C1	3
F20T12	1	20	120	120TP	0.62	30	>0.40	<10	0.85	Trigger	4	D1	3
	2		120	220TP	0.59	35	>0.50	<20	0.54	Trigger	5	C1	3
F40T12	2	34	120	240TPH	0.64	75	>0.95	<25	0.88	Rapid	5	C2	3
			277	240TPH277	0.30	78	>0.95	<20	0.90	Rapid	5	C2	3
	2	40	120	240TPH	0.77	88	>0.95	<20	0.91	Rapid	5	C2	3
			277	240TPH277	0.33	88	>0.95	<20	0.91	Rapid	5	C2	3
F72T12	2	55	120	296TPH	1.20	133	>0.95	<25	0.88	Instant	8	D2	3
			277	296TPH277	0.51	133	>0.95	<25	0.90	Instant	15	D2	3
F96T12	2	60	120	296TPH	1.20	133	>0.95	<25	0.74	Instant	8	D2	3
			277	296TPH277	0.53	131	>0.90	<40	0.74	Instant	15	D2	3
		75	120	296TPH	1.40	160	>0.95	<25	1.00	Instant	8	D2	3
			277	296TPH277	0.53	131	>0.90	<40	0.74	Instant	15	D2	3
F72T12HO	2	85	120	296HOTPH	1.85	207	>0.90	<20	0.94	Rapid	5	D8	3
			277	296HOTPH277	0.76	202	>0.95	<25	0.94	Rapid	5	D8	3
F96T12HO	2	96	120	296HOTPH	1.95	220	>0.92	<20	0.93	Rapid	5	D8	3
			277	296HOTPH277	0.78	210	>0.95	<15	0.90	Rapid	5	D8	3
		110	120	296HOTPH	2.20	260	>0.95	<10	0.95	Rapid	5	D8	3
			277	296HOTPH277	0.94	254	>0.95	<10	0.95	Rapid	5	D8	3

Case Styles (inches)

	M	L	W	H
C1	6.00	6.61	2.36	1.57
C2	9.00	9.49	2.40	1.61

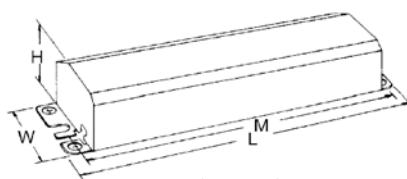


Case C

	M	L	W	H
D1	6.00	6.46	1.89	1.42
D2	11.00	11.65	3.15	1.85
D8	11.00	11.70	3.15	2.50




Case D


Wiring Diagrams




4



5



8



15