


LTR	REVISION	DATE	APPD
A	050418-GP01: UPDATED NOTES & TEST DATA	05-29-18	GP

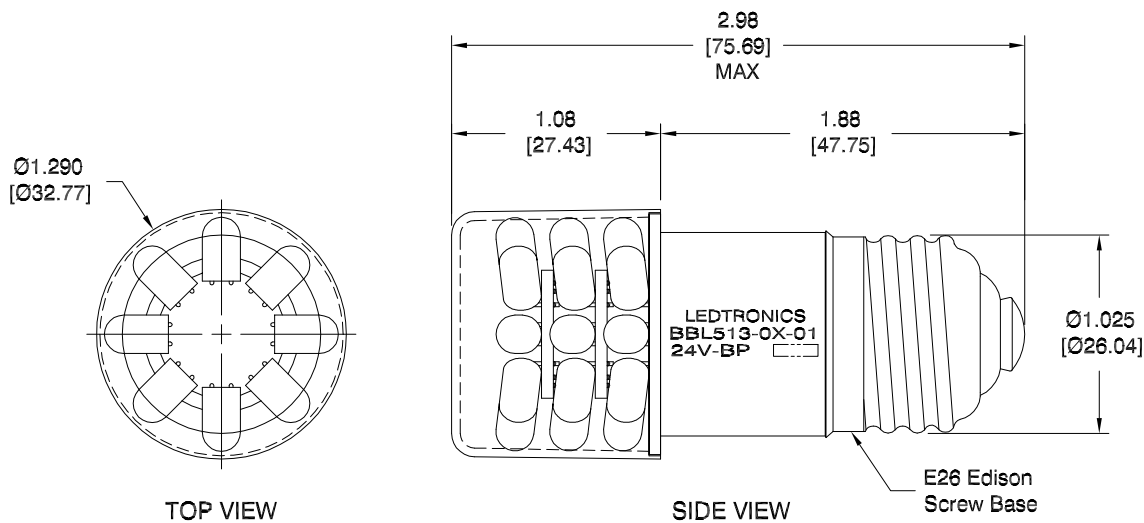

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. LENS MATERIAL / COLOR: POLYCARBONATE LEXAN 141 / CLEAR
3. SLEEVE MATERIAL: RYNITE
4. BASE MATERIAL: NICKEL PLATED BRASS
5. AMBIENT OPERATING TEMPERATURE RANGE: ~-22°F to ~+122°F [~-30°C to ~+50°C]
6. WEIGHT: 0.07 lbs. / 1.2 oz.

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

BBL513-01-01	SUPER RED	24Vdc BP	0.96 W	0.060 A	36 lm	633
BBL513-03-01	AQUA GREEN	24Vdc BP	1.4 W	0.080 A	57 lm	521
BBL513-04-01	SUPER YELLOW	24Vdc BP	0.96 W	0.060 A	26 lm	593
BBL513-06-01	COOL WHITE	24Vdc BP	1.4 W	0.080 A	38 lm	8000K
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	TOTAL LUMENS	λP nm COLOR TEMP. (K)

LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE							
BBL513-0X-01							
DWG NO		SCALE		SHEET		DATE	
BBL513002-CUST		1:1		1 OF 1		10-06-09	
CODE IDENT NO.	DWG BY GP	CHK BY	QA EE	MFG LD	R&D KS		
8Z410	10-06-09		05-30-18	05-30-18	05-30-18		