


Specifications

Model Number:	10-0155
Input Voltage:	230v AC
Frequency:	50/60 Hz.
Lamp Type:	See Chart on Next Page
Certifications:	UL #E191525
Size:	11.73" x 3.23" x 1.23"
Weight:	32.8 oz.
Mounting:	Slotted Mounting Tabs



1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.

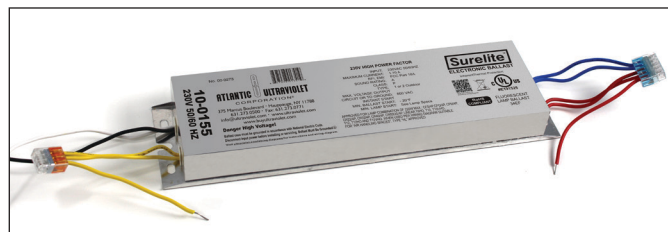

10-0155
230-240V 50/60 HZ

ATLANTIC ULTRAVIOLET CORPORATION®

375 Marcus Boulevard • Hauppauge, NY 11788
(631) 273-0500 • Fax: (631) 273-0771
Sales@AtlanticUV.com • Ultraviolet.com • BuyUltraviolet.com

Danger High Voltage!

WARNING: Install in accordance with the national and local electrical code. Disconnect power before servicing. Ballast must be grounded.

ATTENTION: L'installation doit être conforme aux normes du code national électrique. Débranchez l'alimentation avant l'entretien. Le ballast doit être mis à la terre.

MAXIMUM CURRENT: 1.10A
RFL EMI: FCC Part 18A
SOUND RATING: A
CLASS: P
TYPE: 1 or 2 Outdoor
MAX. VOLTAGE OUTPUT: 600VAC
CIRCUIT OR TO GROUND:
INSTANT START:
MIN. BALLAST START: -20°F
MIN. LAMP START: See Lamp Specs

230V HIGH POWER FACTOR

APPROVED FOR LAMP COMBINATION OF 220W MAX. CFS4P, CFS4P, CF4P, CR224P, CR224P, CR404P, CR550S4P, LINEAR T8HO, T10, T10VHO, T12, T12HO AND T12VHO, WHEN USED PER WIRING DIAGRAM SUITABLE FOR "AIR HANDLING SPACES", TYPE "H", APPROVED

When this ballast is used outside of Canada or if only used in the United States, this ballast is approved for additional lamp types: CFS4P, CF4P, CF4P, CR224P, CR224P, CR404P, CR550S4P. For use only with a compact circular lamp (U-bend or a similar lamp that would employ a lampholder arrangement that disconnects all lamp contacts simultaneously.

Visit ultraviolet.com/wiringdiagram for instructions and wiring diagram.

Surelite™
ELECTRONIC BALLAST

RoHS COMPLIANT

UL US
#E191525
FLUORESCENT LAMP BALLAST 34EF

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.


Lamp Types

Lamp Types	Wiring Diagram
SANITRON® S2400C Lamp Part No. 05-1311-R	1
GX48L	1
GX48VZ	1
GX48L/4	2
GX48VZ/4	2

This ballast may be acceptable for use with lamps not listed here.
Contact us to discuss your requirement.


Connections

Wiring Diagram 1

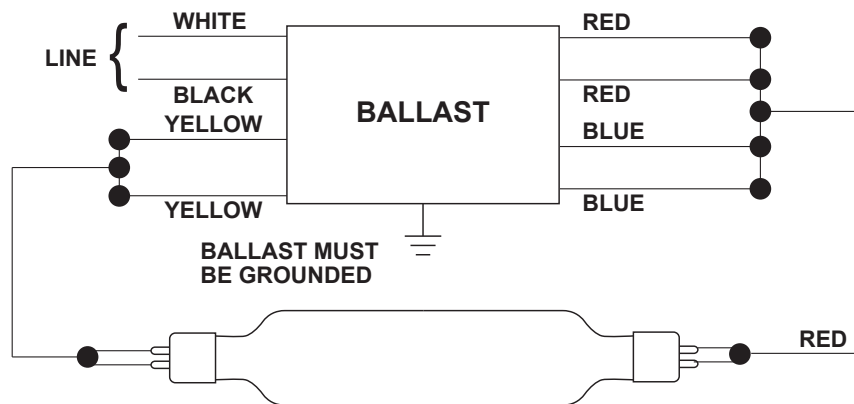

Wiring Diagram 2

Call factory with additional
connection questions
631-273-0500



The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.