

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacor.com

Customer Name:
Project Name:
Fixture Type:





GE
Lighting

17986 - 100PAR/H/FL25

GE Floodlight PAR38

- Designed with a unique all-weather construction, they withstand harsh weather conditions better than regular bulbs.
- Uses Halogen technology for a brighter, crisper light
- GE's Floodlights cast a wider beam that adds drama to driveways and yards.

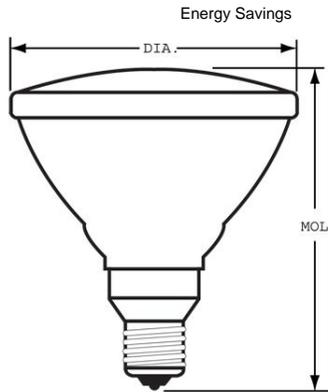

GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR38
Base	Medium Skirt (E26/50x39)
Filament	CC-8
Wattage	100
Voltage	120
Rated Life	2000 hrs
Primary Application	Yard Stake

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1500
Center Beam Candlepower (CBCP)	5000
Color Temperature	2900 K
Nominal Initial Lumens per Watt	15

DIMENSIONS

Maximum Overall Length (MOL)	5.3130 in(135.0 mm)
Bulb Diameter (DIA)	4.750 in(120.6 mm)
Bulb Diameter (DIA) (MAX)	4.750 in(120.6 mm)

PRODUCT INFORMATION

Product Code	17986
Description	100PAR/H/FL25
Standard Package	Case
Standard Package GTIN	10043168179864
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168179867

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.