

RADIONIC

INDUSTRIES, INC.

HYBRID BALLAST (ELECTRONIC START)

For Use with F15T8/T12, F18T18, F20T8/12, FC8T9, F30T8/T12, FC12T9, F40T12-25W, F40T12-34W and F40T10/T12



New
ValueStar
Ballast



Key Benefits

- VALUE-PRICED
- UL / CUL LISTED


Features

- STARTING TEMP: +50° F
- END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Power Factor	Crest Factor
IS215-40CTP	120V AC 60 Hz	F15T8	15	2	25	0.7A	> 0.51	< 1.42
		F15T12	15	2	32	0.7A	> 0.50	< 1.42
		F18T8	18	2	33	0.7A	> 0.50	< 1.42
		F20T8	20	2	33	0.7A	> 0.50	< 1.42
		F20T12	20	2	35	0.7A	> 0.51	< 1.42
		FC8T9	22	2	35	0.7A	> 0.50	< 1.75
		F30T8	30	2	52	0.7A	> 0.65	< 1.75
		F30T12	30	2	41	0.7A	> 0.60	< 1.75
		FC12T9	32	2	46	0.7A	> 0.60	< 1.75
		F40T12-25W	40	2	48	0.7A	> 0.75	< 1.75
		F40T12-34W	34	2	42	0.7A	> 0.55	< 1.75
		F40T10	40	2	48	0.7A	> 0.75	< 1.75
		F40T12	40	2	48	0.7A	> 0.75	< 1.75
IS115-40CTP	120V AC 60 Hz	F15T8	15	1	18	0.35A	> 0.51	< 1.70
		F15T12	15	1	21	0.35A	> 0.50	< 1.70
		F18T8	18	1	22	0.35A	> 0.50	< 1.75
		F20T8	20	1	22	0.35A	> 0.50	< 1.75
		F20T12	20	1	23	0.35A	> 0.51	< 1.75
		FC8T9	22	1	23	0.35A	> 0.50	< 1.85
		F30T8	30	1	32	0.35A	> 0.65	< 1.90
		F30T12	30	1	26	0.35A	> 0.60	< 1.80
		FC12T9	32	1	28	0.35A	> 0.60	< 1.90
		F40T12-25W	40	1	28	0.35A	> 0.75	< 1.85
		F40T12-34W	34	1	26	0.35A	> 0.55	< 1.90
		F40T10	40	1	29	0.35A	> 0.75	< 1.90
		F40T12	40	1	29	0.35A	> 0.75	< 1.85

Enclosure Dimension (inches)

	Length (L)	Width (W)	Height (H)	Mounting (M)
IS215-40CTP	6.5	1.87	1.37	6.12
IS115-40CTP	6.5	1.87	1.37	6.12

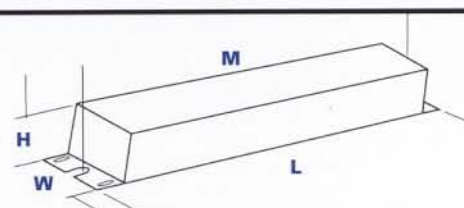

6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net