



LED PAR38

10PAR38/COR/930/F40/DIM/P/ULW/T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	40 degree(s)
Luminous Flux	1,000 lm
Luminous Intensity (Nom)	1,900 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color Consistency	<4
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Non	n) 70 %
Operating and Electrical	
Input Frequency	60 Hz
Power Consumption	10 W
Lamp Current (Nom)	120 mA
Wattage Equivalent	90 W

Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	120 V
Temperature	
Ambient temperature range	-40 to +113 °F
T-Case Maximum (Nom)	176 °F
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Plastic
Bulb Shape	PAR38
UL Wet/ damp/ dry location	Wet location
Approval and Application	
Suitable For Accent Lighting	Yes
T20 compliant	
120 Computant	Yes
120 compliant	Yes


Datasheet, 2023, December 15 data subject to change

LED PAR38

Application Conditions	
can it be used in closed luminaires	Yes
Product Data	
Order product name	10PAR38/COR/930/F40/DIM/P/ULW/T20
	6/1FB
Full product name	10PAR38/COR/930/F40/DIM/P/ULW/T20
	6/1FB


Order code	586248
Material Nr. (12NC)	929003738204
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677586249
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677586244

Dimensional drawing




Product	D	С
10PAR38/COR/930/F40/DIM/P/ULW/T20 6/1FB	4-7/8 inch	5-1/8 inch

Photometric data






Accent Lighting Spots - 10PAR38/COR/930/F40/DIM/P/ULW/T20 6/1FB

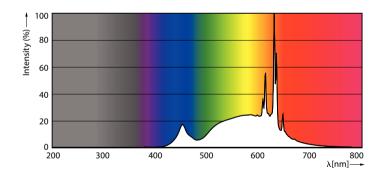

Spectral Power Distribution Colour - 10PAR38/COR/930/F40/DIM/P/ULW/T20 6/1FB


LED PAR38


Photometric data



Light Distribution Diagram - 10PAR38/COR/930/F40/DIM/P/ULW/T20 6/1FB

Lifetime

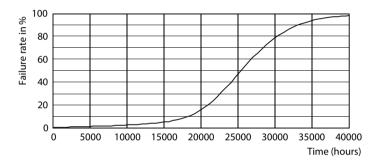



Life Expectancy Diagram - 10PAR38/COR/930/F40/DIM/P/ULW/T20 6/1FB

Lumen Maintenance Diagram - 10PAR38/COR/930/F40/DIM/P/ULW/T20 6/1FB



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.