



Specification Sheet

Input Volts	120	277			
Regulation					
Line Volts	±10%	±10%			
Lamp Watts	±10%	±10%			
Power Factor (min)	90%	90%			
Input Watts	295 W	295 W			
NOM. Open Circuit Voltage	280 V	280 V			
Line Current (Amps)					
Operating	2.50	1.10			
Open Circuit	1.65	0.70			
Starting	1.90	0.80			
Recommended Fuse (Amps)	8	4			
Lamp Dropout Voltage (Line)	75 V	170 V			
Ratings					
Insulation Class	H (180°C)	H (180°C)			
Sound Rating	C	C			
MIN. Starting Temperature	-22°F -30°C	-22°F -30°C			
CAPACITOR Specifications					
Microfarads	-	-			
Volts (min.)	-	-			
60Hz Test Procedures					
High Potential Test 1 Minute	2000 V	2000 V			
High Potential Test 1 Second	2500 V	2500 V			
Secondary Open Ckt Voltage (V)	250 - 310	250 - 310			
Secondary Current Shorted (A)	2.15 - 2.65	2.15 - 2.65			
Input Operating Current (A)	2.25 - 2.75	1.00 - 1.20			
Input Open Circuit Current (A)	0.80 - 2.40	0.35 - 1.10			
Input Short Circuit Current (A)	1.35 - 2.30	0.55 - 1.00			
Physical Characteristics					
Weight	18.0 lbs	18.0 lbs			
Lead Lengths (inches)	12-14	12-14			
Coil Material (Pri. / Sec.):	Cu / Cu	Cu / Cu			

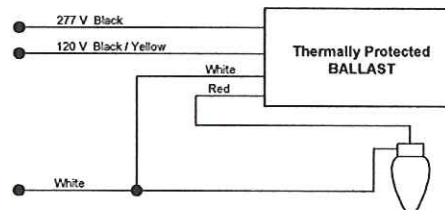

Wiring Diagram

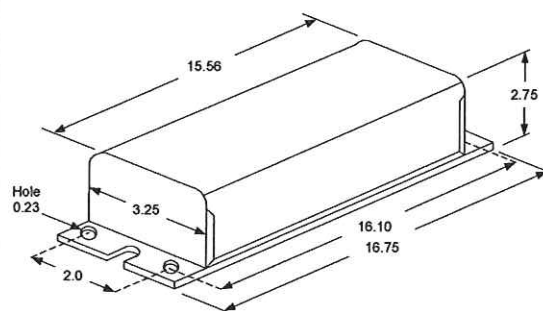

Reference Drawing

Capacitor: Internal

Ignitor: None

Insulate unused input lead
with proper electrical insulation

Anchor bracket / tab
provided for splice box
SB-4 (not included)

Document #: 010-12796-00
Date: 3/5/2008
Status: Production
Replaces Catalog #: New Design

Data is based upon tests performed by Universal Lighting Technologies in a controlled environment and is representative of relative performance. Actual performance may vary depending on operating conditions. Specifications are subject to change without notice.