

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The BLTR Best-Value Low Profile LED Relight Assembly is a cost effective solution for renovating existing fluorescent troffer and parabolic fixtures while providing upgraded aesthetics and outstanding performance. The BLTR's popular center basket design offers a clean, versatile style, and volumetric distribution. The wide range of lumen packages and control and driver options make the BLTR a great choice for many applications including offices, schools, hospitals, retail spaces and other general lighting applications. Certain airborne contaminants can diminish integrity of acrylic. [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

**CONSTRUCTION** — Universal end brackets are constructed of 22-gauge powder-painted steel and are secured to the host fixture with provided TEKS™ screws. The driver and light engine assembly is integrated in the BLTR door assembly making this an extremely simple, time saving, relight solution. The door frame and reflector assembly is made of cold-rolled steel and is painted after fabrication with a matte white powder paint for improved aesthetics and increased light diffusion. Diffusers are extruded from impact modified acrylic for increased durability. Diffuser trim rings provide an attractive mounting for integral sensors as well as adding a decorative element to the luminaire aesthetics.

LED boards and driver are accessible from below.

**OPTICS** — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces — rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available - curved and square designs with linear prisms or a smooth frosted finish.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000). Color Variation within 3-step MacAdam ellipse (3SDCM).

**Non-Configurable BLTR Relight:** Generic 0-10 volt dimming driver. Dims to 10%

**Configurable BLTR Relight:** available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information below.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, nLight AIR RIO, RES7 occupancy sensors, and photo controls. Simply connect all the nLight enabled control devices and the BLTR Relight assembly using standard Cat-5 cabling. Unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission. Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting. Driver disconnect provided where required to comply with US and Canadian codes.

**SENSOR — Integrated sensor (individual control):** SensorSwitch MSD7ADCX ((Passive infrared (PIR)) or MSDPD77ADCX ((PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 5 for more details on the integrated sensor.

**Integrated Sensor (nLight Wired Networking):** This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 6 for the nLight sensor options.

**Integrated Smart Sensor (nLight Air Wireless Platform):** The rES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an automatic dimming photocell, and either a digital PIR or microphonics (PDT) dual technology occupancy sensor. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY™, which allows for simple sensor adjustment. See page 6 for more details on the Integrated Smart Sensor.

**Integrated Wireless Sensor (single room control):** SensorSwitch VERTEX JOT or JOTVTX15 luminaire-embedded occupancy and ambient light sensor allows the luminaire to power off when the space is unoccupied or when enough ambient light is entering the space. See page 4 for more details on the integrated wireless sensor.

**INSTALLATION** — After existing fluorescent components are removed from the host housing, universal end brackets are secured in place with TEKS™ screws. The BLTR's integrated driver and light engine door assembly can then be hinged to the universal end brackets and will hang in place for completion of assembly plug-in wiring. Rotate the doorframe assembly closed and pivot the cam latches to secure the doorframe in place. Suitable for damp location installations. Damp location not available with sensor versions.

**LISTINGS** — UL/CUL Listed for use in fluorescent light fixtures. Installing Relight assemblies per instructions will not impact existing fixture UL listing. Tested to LM80 standards.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**BUY AMERICAN ACT** — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

### BLTR Relight Series

# 2BLT2R

2' x 2' Relight  
LED



eldoLED



JOT  
JUST ONE TOUCH



#### Specifications

Length: 23.9 (60.7)

Width: 23.9 (60.7)

Depth: 2.75 (6.9)

Weight: 10 (25.4)

All dimensions are inches (centimeters) unless otherwise specified.

## Embed nLight controls today. Prepare for tomorrow.

### Now



User-friendly install



Enhanced energy savings



Code compliance

### Tomorrow



Scalability



Space configuration



Future-ready

## A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background**\*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background**\*

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details.

# 2BLT2R Volumetric Recessed Lighting 2'x2' Relight

DIGITAL NAVIGATION | [Home](#) | [Ordering](#) | [nLight Platform](#) | [SensorSwitch JOT](#) | [Photometrics](#) | [Performance Data](#)



A+ Capable options indicated by this color background.

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** 2BLT2R 33L ADP EZ1 LP835

2BLT2R													
Series		Trim Type/ Air Function		Lumens <sup>2</sup>		Diffuser		Voltage		Driver		Color temperature	
2BLT2R 2X2 BLTR	(blank)	Standard white two-piece flanged bracket		<b>Standard efficiency (&gt;125 LPW)</b>  20L 2000 33L 3300 40L 4000	<b>High efficiency<sup>3</sup> (&gt;130 LPW)</b>  20LHE 2000 33LHE 3300 40LHE 4000 48LHE 4800	ADP	Curved, linear prisms	(blank)	MVOLT	EZ1 eldoLED dims to 1% (0-10 volt dimming)  GZ1 Dims to 1% (0-10V dimming) <sup>6</sup>  GZ10 Dims to 10% (0-10V dimming) <sup>6</sup>  SLD Step-level dimming <sup>7</sup>	LP830 82CRI, 3000 K LP835 82CRI, 3500 K LP840 82CRI, 4000 K LP850 82CRI, 5000 K LP930 90CRI, 3000K LP935 90CRI, 3500K LP940 90CRI, 4000K LP950 90CRI, 5000K		
	A	Standard two-piece flanged bracket painted black to match parabolic / air-handling reveals				ADSM	Curved, smooth	120	120V				
	F	Flangeless two-piece bracket for installation in drywall / “hard lid” ceilings				SDP	Square, linear prisms	277	277V				
						SDSM	Square, smooth	347	347V <sup>4,5</sup>				
						<b>Diffusers w/ trim rings</b>							
	LPB	One-piece low profile bracket for installation in some obstructed housings (consult factory) (see pg. 4)				ADPT	Curved, linear prisms						
						ADSMT	Curved, smooth						
						SDPT	Square, linear prisms						
						SDSMT	Square, smooth						

nLight Interface	Control <sup>10</sup>		Standby Mode		Options	
<b>nLight Wired</b> (blank) no nLight <sup>®</sup> interface N80 nLight with 80% lumen management N80EMG nLight with 80% lumen management. For use with generator supply EM power <sup>8</sup> N100 nLight without lumen management N100EMG nLight without lumen management. For use with generator supply EM power <sup>8</sup>	<b>nLight Wired</b> (blank) No sensor control NES7 nLight™ nES 7 PIR integral occupancy sensor <sup>11</sup> NESPDT7 nLight™ nES PDT 7 dual technology integral occupancy control <sup>11</sup> NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell <sup>11</sup> NESPDT7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell <sup>11</sup>	<b>Individual Control</b> MSD7ADCX PIR integral occupancy sensor with automatic dimming control photocell <sup>12</sup> MSDPDT7ADCX PDT integral occupancy sensor with automatic dimming control photocell <sup>12</sup> JOT Wireless room control with "Just One Touch" pairing <sup>18</sup> JOTVTX15 Wireless occupancy sensor with "Just One Touch" pairing <sup>18</sup>	NOC Occupancy sensor disabled <sup>13</sup>		BDP Disconnect Plug EL7L 700 lumen battery pack EL14L 1400 lumen battery pack E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS BGTD Bodine Generator Transfer Device <sup>14</sup> GLR Fast-blowing fuse <sup>15</sup> GMF Slow-blowing fuse <sup>15</sup> NPLT Narrow pallet FAO Field adjustable output <sup>16</sup> BAA Buy America(n) Act Compliant JP40 Job Pack	
<b>nLight Wireless</b> (blank) no nLight <sup>®</sup> interface NLTAIR2 nLight AIR Generation 2 enabled <sup>9</sup>	<b>nLight Wireless</b> RES7 nLight AIR control with PIR integral occupancy sensor and automatic dimming photocell <sup>17</sup> RES7PDT nLight AIR control with PDT dual technology integral occupancy sensor and automatic dimming photocell <sup>17</sup> RIO nLight AIR radio module without sensor <sup>17</sup> RES7EM nLight AIR PIR integral occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection <sup>17</sup> RES7PDTEM nLight AIR microphonics dual technology occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection <sup>17</sup> RIOEM nLight AIR radio module less sensor, with UL924 Emergency Operation, via power interrupt detection <sup>17</sup>					

### Notes

- Consult factory for airflow data.
- Approximate lumen output.
- All versions may not achieve 130+ LPW. Refer to photometry on [www.acuitybrands.com](http://www.acuitybrands.com).
- Not available with EL7L or EL14L battery packs.
- 347 not available with SLD
- GZ1, GZ10 not available with any Control or Sensor options.
- Not available with N80, N80EMG, N100, N100EMG, NLTAIR2, or occupancy control.
- nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture.
- Must order with RES7, RES7PDT, or RIO sensor. Only available with EZ1 driver.
- Must specify diffuser with trim rings. See sensor options on page 4.
- Requires N80, N80EMG, N100, or N100EMG.

- Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate. Not available with Controls options.
- Can only be ordered in conjunction with EZ1, NLTAIR2, RES7/RES7PDT. Occupancy sensor disabled at factory but can be re-enabled upon commissioning.
- Requires BSE labeling. Consult factory for options.
- Must specify voltage, 120 or 277 with GLR & GMF fusing.
- Consult factory.
- See UL924 Sequence of Operation instruction on page 3. When combined with the EZ1 option, can be used as a normal power sensing device for nLight AIR devices and luminaires with EM emergency options.
- Wired 0-10v dimming control not available. Not available with nLight Interface or Controls options. Not available with SLD, NOC, BGTD, or FAO. Must specify diffuser with trim rings.

## Multiple Diffuser Options



## Non-Configurable BLTR

Non-Configurable BLTR								
Stock	Catalog Description*	UPC	Lumens	Wattage	LPW	Color Temperature	Voltage	Pallet Qty
Stock	2BLT2R 33L ADP LP835	190887550900	3313	27	124	3500K/80 CRI	120-277	52
	2BLT2R 33L ADP LP840	190887550931	3404	27	127	4000K/80 CRI	120-277	52


## UL924 Sequence of Operation

The below information applies to all nLight AIR devices with an EM option.

- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

## Fit &amp; Compatibility

The 2BLT2R Relight Assembly was designed to upgrade recessed 2x2 fixtures, including most parabolic and lensed troffers from all major manufacturers. Dimensional requirements are below, but Lithonia Lighting recommends a trial installation prior to purchasing project quantities.

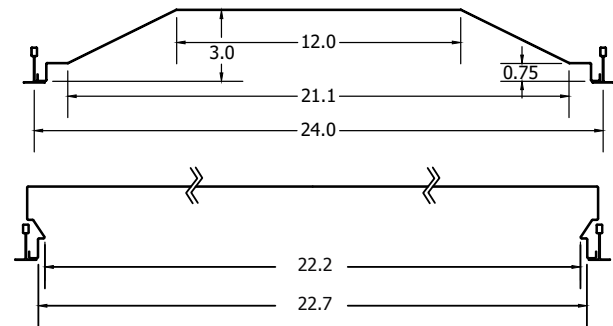

## Accessories &amp; Replacement Parts

Replacement Parts: Order as separate catalog number.	
DBLTR24 ADP LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 SDP LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 ADSM LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 SDSM LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 ADPT LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 SDPT LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 ADSMT LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 SDSMT LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 ADPT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 SDPT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 ADSMT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)
DBLTR24 SDSMT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)
U10528B	2 ft. replacement troffer trim strip
RK8BDP 2P U	Disconnect Plug (BDP), 2 Pole, Package of 1
RK8BDP 3P U	Disconnect Plug (BDP), 3 Pole, Package of 1
RK8BDP 2P J10	Disconnect Plug (BDP), 2 Pole, Package of 10
RK8BDP 2P J40	Disconnect Plug (BDP), 2 Pole, Package of 40

## Emergency Battery Pack Options - Field Installable

Battery Model Number	Wattage	Runtime (Minutes)	Lumen Output* @ 120 Lumens/Watt	Other
ILB CP07 2H A	7W	120	840	Storm Shelter / 2 Hour Runtime
ILB CP10 A	10W	90	1200	
ILBLP CP10 HE SD A	10W	90	1200	Title 20, Self Diagnostic
ILB CP10 HE AELR A	10W	90	1200	Title 20; Enabled with Self Testing, Automated Reporting (STAR)
ILBLP CP15 HE SD A	15W	90	1800	Title 20, Self Diagnostic
ILB CP20 HE A	20W	90	2400	Title 20
ILB CP20 HE SD A	20W	90	2400	Title 20, Self Diagnostic

All the above are UL Listed products that are certified for field install external/remote to the fixture.

\*Minimum delivered lumen output to assist in product selection for increased fixture mounting height.

The CP10 delivered emergency illumination outperforms legacy 1400 lumen fluorescent emergency ballast.

Please contact us at [productsupportemergency@acuitybrands.com](mailto:productsupportemergency@acuitybrands.com) for any Emergency Battery related questions.



Field Installed Emergency LED Driver



ILB CP10 HE AELR A

**Compliance Just Got Easier!**

Emergency Lighting with Self Testing Automated Reporting (STAR), enables self-testing and automated reporting to aid in life safety code compliance. Emergency lighting equipment enabled with STAR, automatically conducts the required monthly and annual tests, logs results within the units, and wirelessly communicates test data on demand to the CLARITY+ mobile app. **Leave the ladders, disruptions and written records behind with emergency lighting solutions with STAR!**

Life Safety Code (NFPA101)  
Testing & Reporting Requirements



30 seconds every 30 days



90 minutes every year



Keep records for 5 years



DOWNLOAD CLARITY+



## Application Guide








**2BLT2R** — Typically used for lensed troffer installations. Assembly contains white end brackets and is supplied with white trim strips for use in closing gaps down fixture sides (installer's choice - not required).

*\*Note: This kit will fit in Lithonia's Avante non-air fixture.*

**2BLT2R A** — Typically used for parabolic installations with black reveal. Assembly contains black end brackets to match black reveal around host housing. Does not interfere with host housing air supply/return if present (along fixture sides).



### BLTR Bracket "fit" recommendations

							
Ceiling type	15/16" T-grid	9/16" T-grid	Narrow Screw-slot	Hard Ceiling w/ "Lay-In" style plaster frame (drywall grid adapter)	Hard Ceiling with integral drywall mounting ("twing gate" housing)	1x1 hard tile ceiling	Deep louver riser ("renovator" parabolic)
Recommended BLTR bracket type	Standard	Standard	F bracket *	Standard	F bracket	F bracket	LPB bracket

\* Standard bracket may work in some



### BLTR "F" bracket vs. standard

Because the "F" bracket does not have the standard T-grid return flange, it can be used in many hard ceiling / drywall frame installations where the standard bracket would be obstructed.

This "F" bracket can also often be used in narrow screw-slot grid ceilings.

### Replacement / Trial parts

**To order BLTR Standard 2pc end bracket replacement (shipped as assembled units):**

- 2x4 = Cl code \*257YX0 T5746 (qty 2 required per kit)
- 2x2 = Cl code \*257YX0 T5746 (qty 2 required per kit)
- 1x4 = Cl code \*259VRM T5745 (qty 2 required per kit)

**To order BLTR "F" 2pc end bracket replacement (shipped as assembled pairs):**

- 2x4 = Cl code \*254PVS 2BLTRF FLANGE BRKT ASSEMBLY (qty 1 req. per kit)
- 2x2 = Cl code \*254PVS 2BLTRF FLANGE BRKT ASSEMBLY (qty 1 req. per kit)
- 1x4 = Cl code \*255SWN 2BLTRF FLANGE BRKT ASSEMBLY (qty 1 req. per kit)

### Differences between standard BLTR 2pc bracket and LPB 1-piece low profile bracket



Current 2-piece bracket has upper "T" bracket that mounts in most troffer endplates and bridges over most obstructions

**To order BLTR Standard 2pc end bracket replacement (shipped as assembled units):**

- 2x4 = Cl code \*257YX0 T5746 (qty 2 required per kit)
- 2x2 = Cl code \*257YX0 T5746 (qty 2 required per kit)
- 1x4 = Cl code \*259VRM T5745 (qty 2 required per kit)

1-piece design was originally developed for large customer to fit some older troffers where standard bracket would not fit due to endplate obstructions

**To order BLTR low profile 1pc LPB bracket (shipped as assembled units):**

- 2x4 = Cl code \*268PIK GPF N320810 (qty 2 required per kit)
- 2x2 = Cl code \*268PIK GPF N320810 (qty 2 required per kit)
- 1x4 = Cl code n/a not available


## JOT Wireless



### SensorSwitch JOT Enabled Wireless Solution

*Designed with contractors in mind, the SensorSwitch JOT enabled wireless solution offers a straightforward approach to the installation and pairing of lighting fixtures and controls. Absolutely no 0-10V control wires and no mobile apps are needed with JOT enabled products, allowing for lightning speed installation right out of the box.*

- 1. Power:** Install JOT enabled fixtures and controls as instructed.
- 2. Pair:** Insert the pairing tool into the pinhole on the wall switch; press and hold any button for 6 seconds.
- 3. Play:** Once paired, each fixture will individually dim down to 10% brightness. All products will be fully functional.

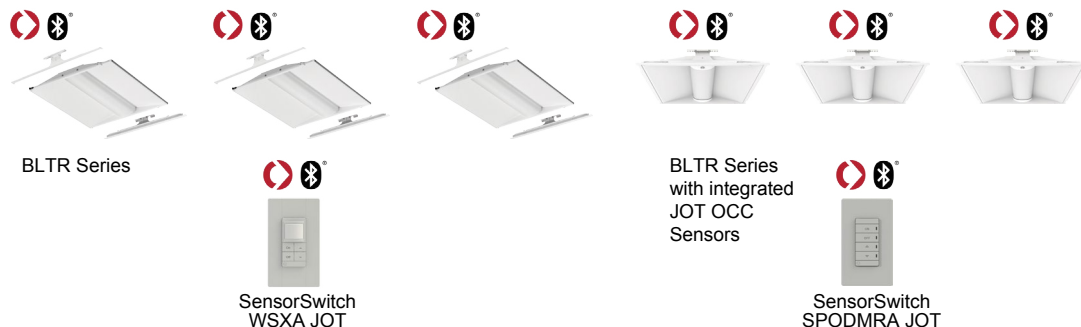




nLight Platform

nLight embedded fixtures offer:	Customers get:
Manual Dimming	Convenience and visual comfort for occupants
Motion Sensing and/or Daylight Harvesting	Energy savings and code compliance
Fixture or Group Level Control	Ability to configure lighting to the space requirements
Flexibility	Ease of fixture moves, adds and changes
Wireless Wall Switch (nLight AIR Only)	Ease and flexibility of placement
Astronomical and Time of Day Scheduling	Energy savings and building security
Scalable Solution	nLight controls to grow with your business
Future-Ready	nLight platform to set foundation for future upgrades and capabilities

nLight Air Wireless

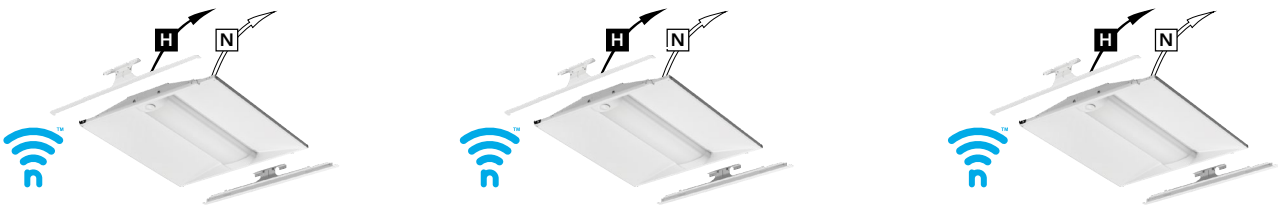

BLTR Series

Simple as 1,2,3


- 1. Install the nLight® AIR fixtures with embedded smart sensor
- 2. Install the wireless battery-powered wall switch
- 3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



nLight AIR rPODBA

Mobile Device

nLight Wired Networking

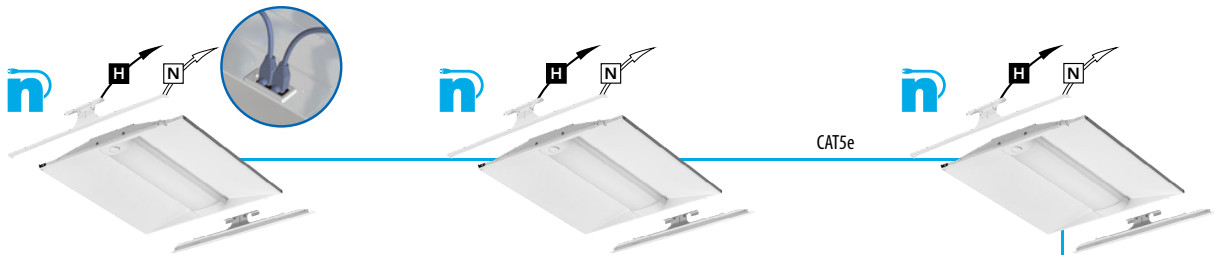

BLTR Series



nLight Wired nPODMA

Simple as 1,2,3


- 1. Install the nLight® Wired fixtures with embedded control
- 2. Install the nLight Wired wall switch
- 3. Connect the fixtures using standard CAT5e cables and the devices will automatically discover each other and work (plug and play)

# 2BLT2R Volumetric Recessed Lighting 2'x2' Relight

Sensor Options					
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking	nLight AIR Networking
		PIR	PDT		
MSD7ADCX	X	X			
MSDPDT7ADCX	X		X		
NES7		X		X	
NES7ADCX	X	X		X	
NESPDT7			X	X	
NESPDT7ADCX	X		X	X	
RES7	X	X			X
RESPDT7	X	X	X		X

## Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and
- 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

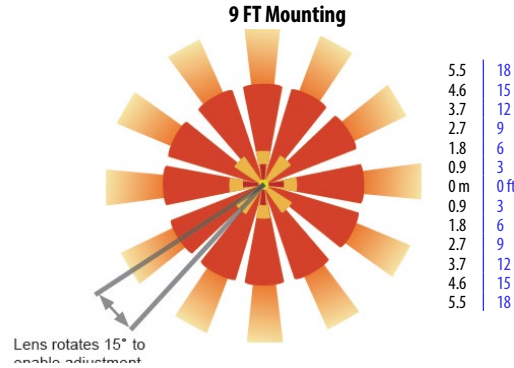

## Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.

The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

## nLight AIR Wireless


nLight AIR is the ideal solution for retrofit or new construction spaces where adding additional wiring can be labor intensive and nLight AIR is available with or without an integral sensor. The integrated rES7 or rES7PDT smart sensors are part of each luminaire in the nLight AIR network, which can be grouped to control multiple luminaires. The granularity of control with the digital PIR occupancy detection and daylight sensing makes a great solution for any application.

## nLight Wired Networking

The nES7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the nES7ADCX includes an integrated photocell, which enables daylight harvesting controls.


For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nESPDT7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the nESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

## Sequence of Operation (MSD7 Sensor)

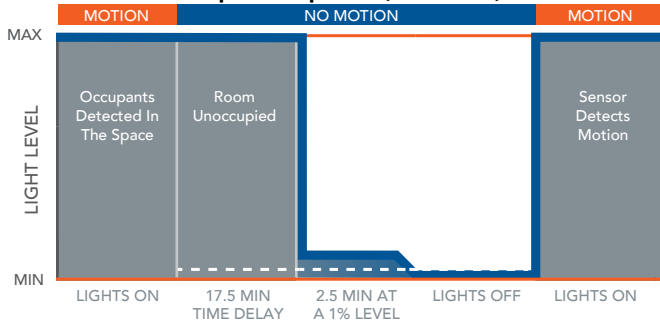

\*The presetting on the automatic dimming photocell is 5fc.

## Sequence of Operation (nES7 and rES7 and Sensor)

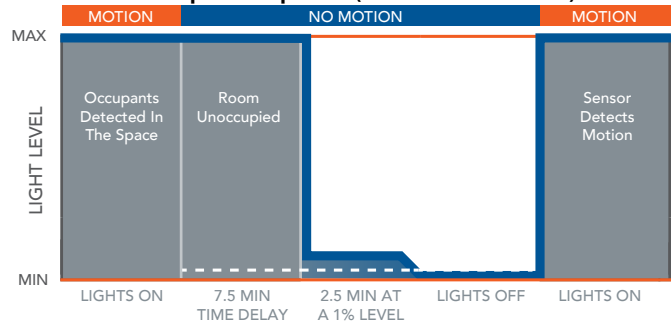

\*The presetting on the automatic dimming photocell is 5fc (nES7) and 10fc (rES7).



## Controls Accessories

### nLight® Wired Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlight](http://www.acuitybrands.com/products/controls/nlight).



WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODMA [Color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODMA DX [Color]	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
Graphic touchscreen	nPOD TOUCH [Color]	Wall switch with raise/lower	nWSX PDT LV DX [color]
Photocell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CAT5 10FT J1
		30' cable	CAT5 30FT J1

### nLight® AIR Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlightair](http://www.acuitybrands.com/products/controls/nlightair).

Wall switches	Model number
On/Off single pole	rPODBA [color] G2
On/Off two pole	rPODB A2P [color] G2
On/Off & raise/lower single pole	rPODBA DX [color] G2
On/Off & raise/lower two pole	rPODBA 2P DX [color] G2

BLTR fixtures with integrated rIO devices complement any small office space. Pair them with an rCMS occupancy sensor and the space now has wireless occupancy sensing and dimming capability. For additional configuration options please consult with Tech Support.

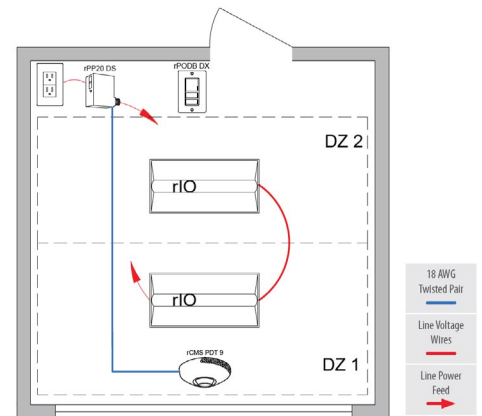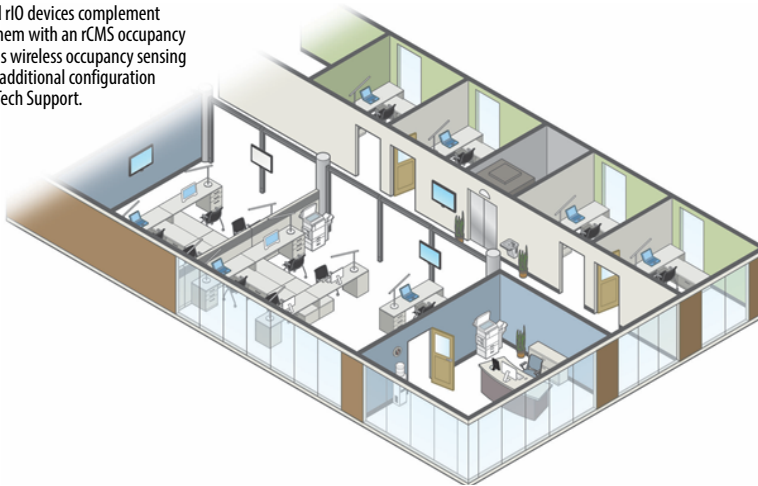

rCMS <sup>1</sup>						Example: RCMS PDT 10 AR G2	
Series / Detection	Power Supply <sup>1</sup>	Occupancy Detection	Lens (Required)		Operating Mode	Generation	
RCMS nLight AIR occupancy and daylight sensor	[blank] Power Supply ordered separately	[blank] PIR Detection PDT Dual Tech PIR/ Microphonics	10	Large Motion/ Extended Range 360°	[BLANK] None AR Auxiliary Relay	G2	Generation 2 compatibility
	PS 150 Standard 150 mA Power Supply		9	Small Motion/ Extended Range 360°			
			6	High Bay 360° Lens			

#### Notes

1 RCMS requires low voltage power from either RPP20 DS 24V G2 or PS150.



SensorSwitch  
WSX




nLight WIRED  
NPOD UNITOUCH



nLight WIRED  
nPODMA DX



nLight AIR  
rPODBA



BLTR with rIO




rPODBA



RCMS


Constant Lumen Management

Enabled by the embedded nLight control, the BLT actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

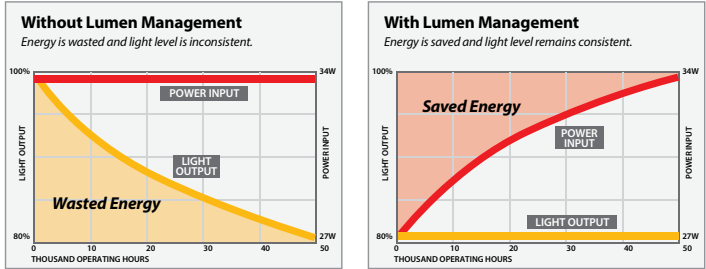


PHOTOMETRICS

2BLT2R 33L ADP LP835, 3241 delivered lumens

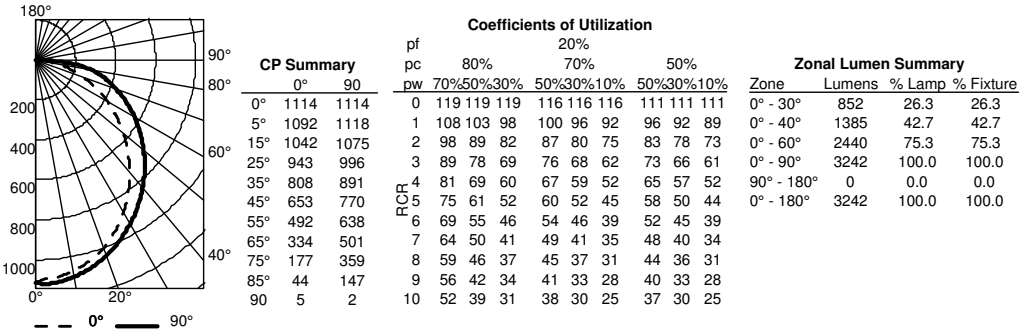


2BLT2R 40L ADP LP835, 4210 delivered lumens

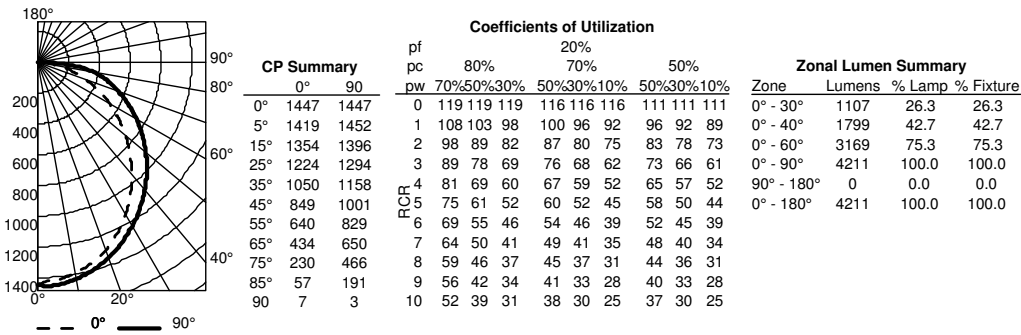

FAO SETTINGS (Field Adjustable Output)

	0-10 Voltage Dimmer	% Lumen Output (approximate)	% Wattage (approximate)
Step 8	Full Output	100%	100%
Step 7	9.0 VDC	98%	100%
Step 6	8.0 VDC	88%	86%
Step 5	7.0 VDC	86%	82%
Step 4	6.0 VDC	82%	80%
Step 3	5.0 VDC	76%	75%
Step 2	4.0 VDC	71%	72%
Step 1	3.0 VDC	67%	71%

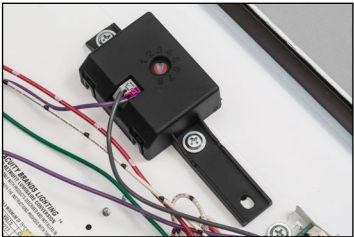

Simple adjustment of output through the use of a flat head screwdriver.

# 2BLT2R Volumetric Recessed Lighting 2'x2' Relight

Performance Data			
Lumen Package	Lumens	Input Watts	LPW
20L ADP LP830	1981	16	127
20L ADP LP835	2051	16	132
20L ADP LP840	2084	16	134
20L ADP LP850	2143	16	138
33L ADP LP830	3237	26	125
33L ADP LP835	3351	26	130
33L ADP LP840	3404	26	132
33L ADP LP850	3502	26	135
40L ADP LP830	3900	31	125
40L ADP LP835	4038	31	130
40L ADP LP840	4102	31	132
40L ADP LP850	4220	31	136

HE Performance Data			
Lumen Package	Lumens	Input Watts	LPW
20LHE ADP LP830	2008	16	129
20LHE ADP LP835	2079	16	134
20LHE ADP LP840	2112	16	136
20LHE ADP LP850	2173	16	140
33LHE ADP LP830	3068	24	128
33LHE ADP LP835	3176	24	133
33LHE ADP LP840	3227	24	135
33LHE ADP LP850	3319	24	139
40LHE ADP LP830	3797	29	129
40LHE ADP LP835	3931	29	133
40LHE ADP LP840	3994	29	135
40LHE ADP LP850	4108	29	139
48LHE ADP LP830	4532	36	126
48LHE ADP LP835	4692	36	130
48LHE ADP LP840	4767	36	132
48LHE ADP LP850	4903	36	136