

**PHILIPS**  
**bodine**

Emergency Drivers

LED

BSL17 / BSL17C



Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Model No: \_\_\_\_\_ Qty: \_\_\_\_\_  
Date: \_\_\_\_\_  
Notes: \_\_\_\_\_

## Emergency LED Driver 7 Watts output power

Product order number: BSL17CU (metal case w/conduit)  
See back page for additional model configurations

### Specifications

#### UL RECOGNIZED

Factory Installation only (Indoor and Damp)

#### Illumination Time

90 Minutes

#### Full Warranty

5 Years (NOT pro-rata)

#### Universal Input Voltage

120-277 VAC, 50/60 Hz

#### AC Input Current

45 mA

#### AC Input Power Rating

3.0 W

#### Output Voltage

30.0 - 130.0 VDC

#### Output Current

175 mA (Maximum)

#### Output Power

7.0 W (Maximum),

#### Test Switch/Charging Indicator Light

2 W - ITS (2-Wire illuminated test switch)\*

#### Battery

High-Temperature, Maintenance-Free  
Nickel-Cadmium Battery  
7- to 10-Year Life Expectancy

#### Battery Charging Current

180 mA

#### Recharge Time

24 Hours

#### Temperature Rating

Ambient : 0°C to +55°C (32°F to 131°F)  
Case: Tc (max): 65°C

#### Dimensions

12.0" x 2.4" x 1.5" (304 mm x 60 mm x 38 mm)  
Mounting Center 11.5" (292 mm)

#### Weight

4.3 lbs. (1.95 kg)



\*4 Wire - ITS is only offered on Type 1 Option 6

### Benefits:

- Controlled power for predictable discharge
- 30 - 130 VDC for wide range of LED loads
- Universal input (120 through 277 VAC, 50/60 Hz)

### Dimensions

12.0" x 2.4" x 1.5" (mounting center - 11.5")

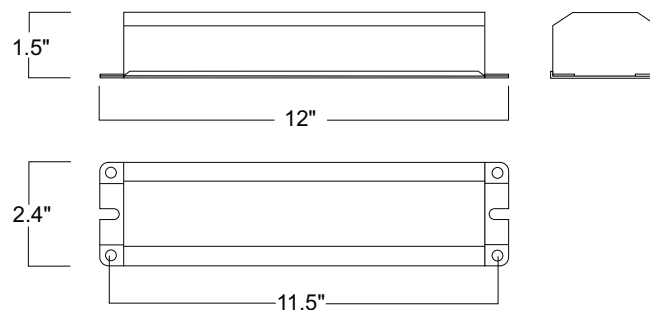

An illuminated test switch/charging indicator light is provided.

# BSL17/BSL17C

## Emergency LED Driver, 7 Watts Output Power

### Application

The BSL17/BSL17C emergency LED driver works in conjunction with an AC LED driver that has an output current not to exceed 1.5 A, to convert new or existing LED fixtures into emergency lighting. The emergency driver consists of a high-temperature nickel-cadmium battery, charger and electronic circuitry in one compact case. The BSL17C/BSL17 can be used with an LED lighting load of up to 7.0 Watts. If used in an emergency-only fixture, no AC driver is necessary. The BSL17 is suitable for indoor and damp locations and for sealed & gasketed fixtures, including fixtures rated for wet locations. The BSL17C is suitable for indoor and damp locations. Neither the BSL17C nor the BSL17 is suitable for air handling heated air outlets and wet or hazardous locations. For more information about specific LED and AC driver compatibility, please call the factory.

### Operation

When AC power fails, the BSL17/BSL17C immediately switches to the emergency mode, operating the LEDs at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode.

### Installation

The BSL17/BSL17C does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency driver. The emergency driver must be fed from the same branch circuit as the AC driver. The BSL17 series may be installed inside (BSL17 only) or on top of (both) the fixture. Installation is not recommended with fixtures where the ambient temperature may fall below 0° C.

### Emergency Illumination

The BSL17/BSL17C operates an LED load of up to 7.0 W.

### Specification

Emergency lighting shall be provided by using a LED fixture equipped with a Philips Bodine BSL17/BSL17C emergency driver. This emergency driver shall consist of a high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one 12" x 2 3/8" x 1 1/2" metal case. (The BSL17C comes with 2' length(s) of flexible conduit.) An illuminated test switch (ITS) to monitor charger and battery and installation hardware shall be provided. It is suitable for

indoor and damp locations and for sealed & gasketed fixtures (BSL17 only). The BSL17/BSL17C shall have 3 Watts of input power and a 15.0 Watt-hour battery capacity and shall comply with emergency standards set forth by the current NEC. The emergency driver shall be UL Recognized for factory installation only and shall be warranted for a full five years from date of purchase.


### Installation Options and Ordering Codes

The BSL17/BSL17C can be ordered in several mounting configurations and with different test switch/LED options. Please see the Ordering Codes on this page to determine which configuration best meet your requirements.


### Warranty

Model BSL17/BSL17C is warranted for five (5) full years from date of purchase. Please see detailed warranty information on our web site.


BSL17 (Order Number BSL17U)  
Includes Loose 2W-ITS Parts Kit

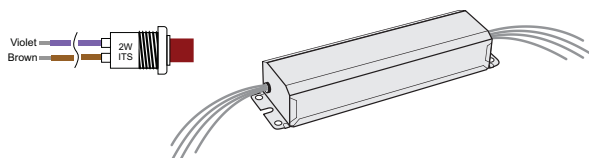

BSL17C Type 1 (Order Number BSL17CU)  
Includes 2W-ITS on Wall Plate

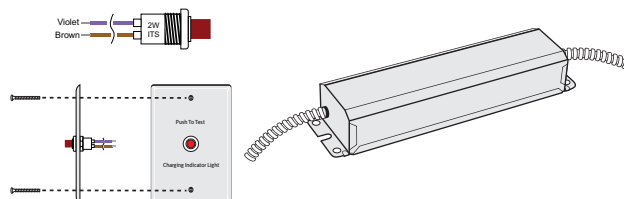


BSL17C Type 1 Option 6 (Order Number BSL17CT1O6U4W)  
Includes 4W-ITS exiting through conduit

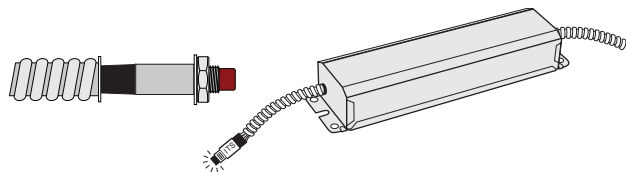

4 W-ITS exits through conduit adaptor. All other wires through the other conduit.

BSL17C Type 2 (Order Number BSLCT2U)  
Includes 2W-ITS on Wall Plate

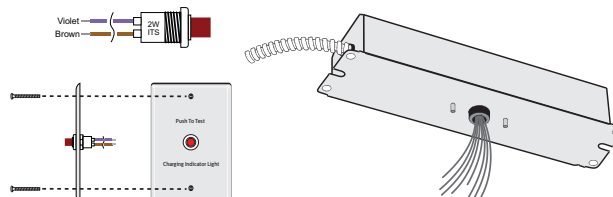

© 2015 Koninklijke Philips N.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Document order number: L2300224 15.04



Philips Emergency Lighting  
236 Mt. Pleasant Rd.  
Collierville, TN 38017  
Tech Support: 888.263.4638  
Sales: 800.223.5728

philips.com/bodine