

PL V 11W DIR

TITANIUM LED SERIES 4.0



PL:EDGE
SERIES

PRO



11W REPLACES



26W
CFL

60% Energy Savings

- Easy to install - Plug & Play Direct
- Ballast smart control technology
- Exceptional efficacy 84 LPW
- Lasts 4 times longer than CFL
- Compatible with most electronic ballasts
- Available in 2700K, 3000K, 3500K, 4000K & 5000K CCT



LM 79

LM 80

TM 21



PL PRODUCT FEATURES

High Performance - Ballast Smart Control

The PL DIR lamp's ballast smart control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W, 32W and 42W CFL PL lamps.

Ballast Type	Lumens	Bare Lamp
13W	700	8W
18W	850	9.5W
26W	920	11W

Innovative Round Design - Patent Pending



GREEN CREATIVE PL V LED Lamp



Other PL V LED Lamp

The PL V lamp features a patent pending fully round design. Compared to other square shaped PL vertical lamps, the GREEN CREATIVE PL V improves the overall light output and aesthetics of the fixture.

PL V 11W DIR

TITANIUM LED SERIES 4.0



APPLICATIONS

Retail



Hospitality




Office



Ref.#: DS077-PLV-11W-DIR

Base: G24q & GX24q (4-pin CFL)
Voltage: Ballast compatible 120-277V
Dimmable: No
PF: 0.9
Lifetime: 40,000 hrs
Weight: 0.22lb / 99g

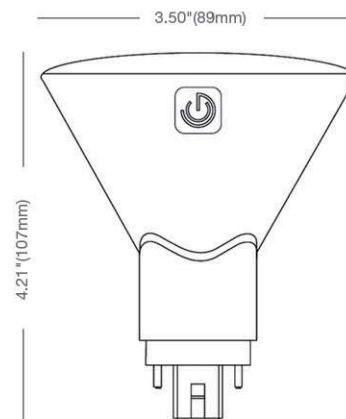

SPECIFICATIONS*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
11PLVG4/827/DIR	97669	11	Warm White 2700K	80	875	80	110°
11PLVG4/830/DIR	97670	11	Warm White 3000K	80	875	80	110°
11PLVG4/835/DIR	97671	11	Neutral White 3500K	80	900	82	110°
11PLVG4/840/DIR	97672	11	Natural White 4000K	80	920	84	110°
11PLVG4/850/DIR	97673	11	Daylight 5000K	80	940	85	110°

BALLAST PERFORMANCE

Ballast Type	Bare Lamp (W)	System (W)	2700K Lumens	3000K Lumens	3500K Lumens	4000K Lumens	5000K Lumens
13W	8	9.4	580	630	680	700	720
18W	9.5	11.3	700	760	820	850	850
26W	11	13.4	875	875	900	920	940
42W	11	13.8	875	875	900	920	940
UNV	11	12.9	875	875	900	920	940

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

* Specification data is preliminary and may be subject to change

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Not intended for use in enclosed fixtures

**** Full installation guide and more details available on website