
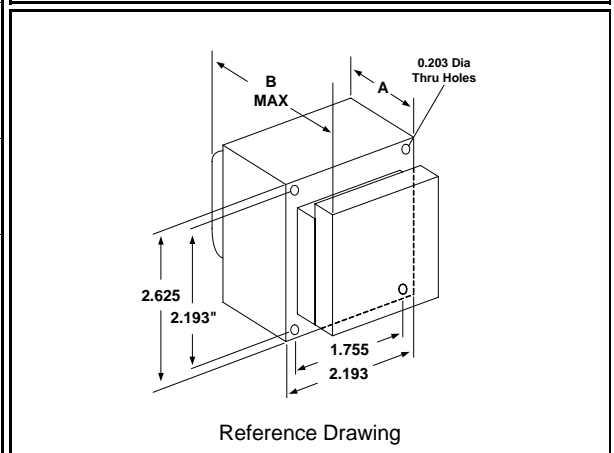



Specification Sheet

Input Volts	120	120			
Regulation					
Line Volts	±5%	±5%			
Lamp Watts	±10%	±10%			
Power Factor (min)	90%	-			
Input Watts	83 W	83 W			
NOM. Open Circuit Voltage	120 V	120 V			
Line Current (Amps)					
Operating	0.75	1.60			
Open Circuit	1.30	-			
Starting	0.90	2.10			
Recommended Fuse (Amps)	8	8			
Lamp Dropout Voltage (Line)	90 V	90 V			
UL Temperature Ratings					
Insulation Class	H (180°C)	H (180°C)			
Temperature Code	A	A			
MIN. Starting Temperature	-40°F -40°C	-40°F -40°C			
CAPACITOR Specifications					
Microfarads	28 uf	-			
Volts (min.)	120 V	-			
60Hz Test Procedures					
High Potential Test 1 Minute	2000 V	2000 V			
High Potential Test 1 Second	2500 V	2500 V			
Secondary Open Ckt Voltage (V)	108 - 132	108 - 132			
Secondary Current Shorted (A)	1.85 - 2.40	1.85 - 2.40			
Input Operating Current (A)	0.68 - 0.84	1.46 - 1.79			
Input Open Circuit Current (A)	0.65 - 1.90	- - -			
Input Short Circuit Current (A)	0.75 - 0.95	1.85 - 2.40			
Core and Coil Specifications					
Dimension A	1.32 in	1.32 in			
Dimension B	2.70 in	2.70 in			
Weight	2.50 lbs	2.50 lbs			
Lead Lengths (inches)	12-14	12-14			
Coil Material (Pri. / Sec.):	Cu	Cu			

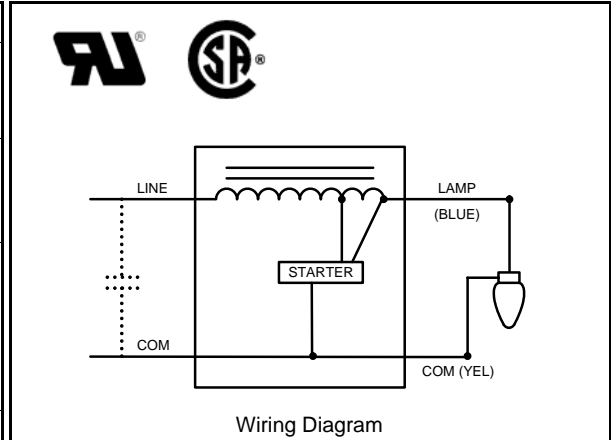

Capacitor: R17058530 **Ignitor: Internal**

Max Case Temp: 100 °C
 Height: 4.76 in BTL: 3 ft
 Width / Diameter: 1.65 in

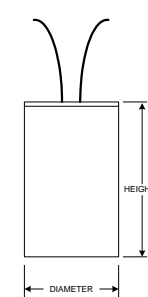

Ignitor is an integral part of the ballast assembly

Oil Cap. - P/N 005-1468-MF Consult Catalog for Specs.

Document #: 010-10393-02
 Date: 11/17/2008
 Status: Production
 Replaces Catalog #: New Design

Data is based upon tests performed by Universal Lighting Technologies in a controlled environment and is representative of relative performance. Actual performance may vary depending on operating conditions. Specifications are subject to change without notice.