

1233-154W



150W S55

High Pressure Sodium

60Hz Reactor


Specification Sheet

Input Volts	120	120			
Regulation					
Line Volts	±5%	±5%			
Lamp Watts	±10%	±10%			
Power Factor (min)	90%	-			
Input Watts	170 W	170 W			
NOM. Open Circuit Voltage	120 V	120 V			
Line Current (Amps)					
Operating	1.50	3.20			
Open Circuit	2.35	-			
Starting	2.20	4.40			
Recommended Fuse (Amps)	6	12			
Lamp Dropout Voltage (Line)	90 V	90 V			
UL Temperature Ratings					
Insulation Class	H (180°C)	H (180°C)			
Temperature Code	A	A			
MIN. Starting Temperature	-40°F -40°C	-40°F -40°C			
CAPACITOR Specifications					
Microfarads	52 uf	-			
Volts (min.)	120 V	-			
60Hz Test Procedures					
High Potential Test 1 Minute	2000 V	2000 V			
High Potential Test 1 Second	2500 V	2500 V			
Secondary Open Ckt Voltage (V)	108 - 132	108 - 132			
Secondary Current Shorted (A)	4.00 - 5.00	4.00 - 5.00			
Input Operating Current (A)	1.35 - 1.70	2.85 - 3.55			
Input Open Circuit Current (A)	2.00 - 2.80	- - -			
Input Short Circuit Current (A)	2.00 - 2.50	4.00 - 5.00			
Core and Coil Specifications					
Dimension A	2.00 in	2.00 in			
Dimension B	3.40 in	3.40 in			
Weight	3.50 lbs	3.50 lbs			
Lead Lengths (inches)	12-14	12-14			
Coil Material (Pri. / Sec.):	Cu	Cu			

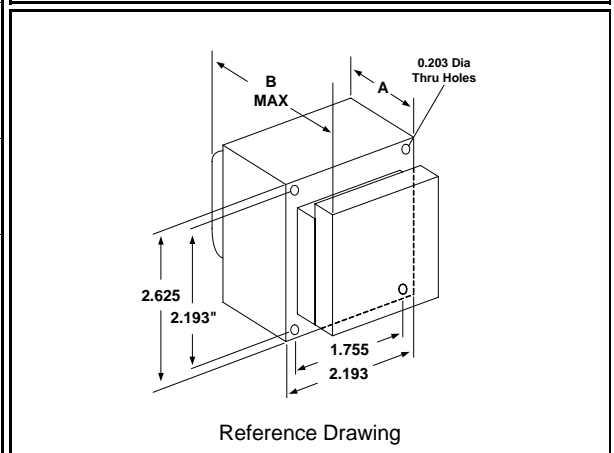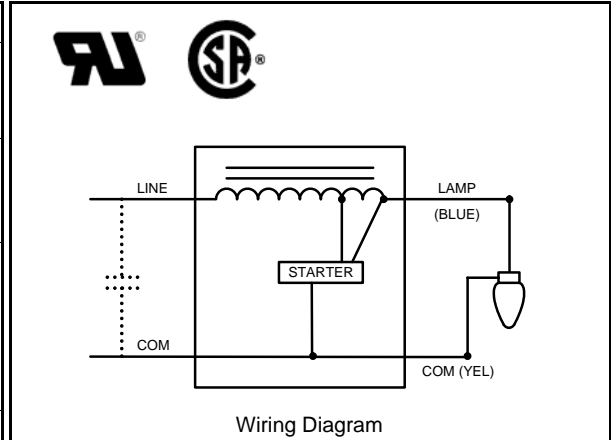

Capacitor: R17058503 **Ignitor: Internal**

Max Case Temp: 100 °C
Height: 3.82 in BTL: 3 ft
Width / Diameter: 1.85 in

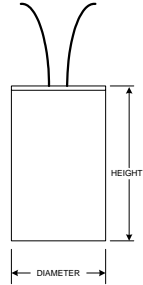

Ignitor is an integral part of the ballast assembly

Oil Cap. - P/N 005-1888-RMF Consult Catalog for Specs.

Document #: 010-12702-01
Date: 11/17/2008
Status: Production
Replaces Catalog #: New Design

Data is based upon tests performed by Universal Lighting Technologies in a controlled environment and is representative of relative performance. Actual performance may vary depending on operating conditions. Specifications are subject to change without notice.