
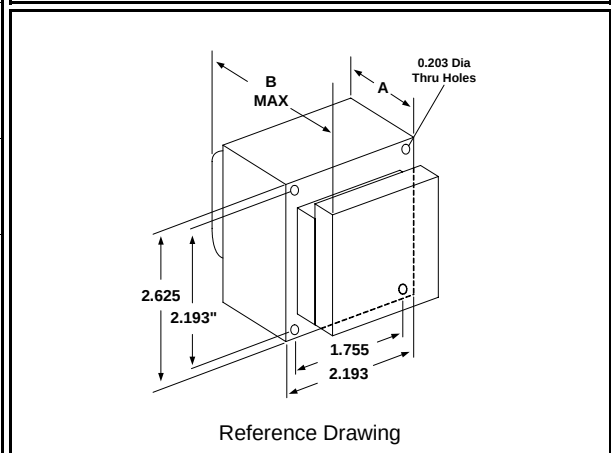



Specification Sheet

Input Volts	120	120			
Regulation					
Line Volts	±5%	±5%			
Lamp Watts	±10%	±10%			
Power Factor (min)	90%	-			
Input Watts	43 W	43 W			
NOM. Open Circuit Voltage	120 V	120 V			
Line Current (Amps)					
Operating	0.40	0.85			
Open Circuit	0.65	-			
Starting	0.65	1.15			
Recommended Fuse (Amps)	2	3			
Lamp Dropout Voltage (Line)	90 V	90 V			
UL Temperature Ratings					
Insulation Class	H (180°C)	H (180°C)			
Temperature Code	A	A			
MIN. Starting Temperature	-40°F -40°C	-40°F -40°C			
CAPACITOR Specifications					
Microfarads	14 uf	-			
Volts (min.)	120 V	-			
60Hz Test Procedures					
High Potential Test 1 Minute	2000 V	2000 V			
High Potential Test 1 Second	2500 V	2500 V			
Secondary Open Ckt Voltage (V)	108 - 132	108 - 132			
Secondary Current Shorted (A)	1.00 - 1.30	1.00 - 1.30			
Input Operating Current (A)	0.35 - 0.45	0.70 - 0.95			
Input Open Circuit Current (A)	0.55 - 0.75	- - -			
Input Short Circuit Current (A)	0.45 - 0.70	1.00 - 1.30			
Core and Coil Specifications					
Dimension A	.63 in	.63 in			
Dimension B	2.00 in	2.00 in			
Weight	1.50 lbs	1.50 lbs			
Lead Lengths (inches)	12-14	12-14			
Coil Material (Pri. / Sec.):	Cu	Cu			

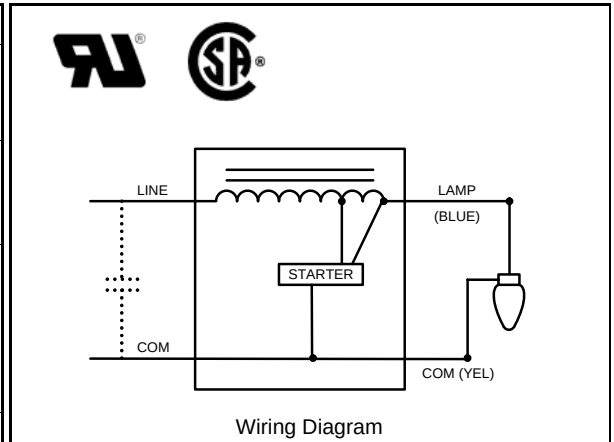

Capacitor: 005-1884-RMF **Ignitor: Internal**

Max Case Temp: 100 °C
 Height: 2.25 in BTL: 3 ft
 Width / Diameter: 1.87 in



Ignitor is an integral part of the ballast assembly

Oil Cap. - P/N R17058520 Consult Catalog for Specs.

Document #: 010-12619-01
 Date: 11/17/2008
 Status: Production
 Replaces Catalog #: New Design

Data is based upon tests performed by Universal Lighting Technologies in a controlled environment and is representative of relative performance. Actual performance may vary depending on operating conditions. Specifications are subject to change without notice.