



140TP	
Ballast Type	Magnetic
Starting Method	Rapid Start
Lamp Connection	
Input Voltage	120Vac +5% -10%
Input Frequency	60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F30T12 30W	1	33	0.61	0.45	< 1.7	0.95	2.88	10
F40T12 25W	1	30	0.55	0.45	< 1.7	0.70	2.33	10
F40T12 34W	1	33	0.61	0.45	< 1.7	0.70	2.12	10
F40T12 40W	1	36	0.56	0.54	< 1.7	0.64	1.78	10

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C;
60°F, 15°C for F40T12 34W lamp.
- Maximum Ballast Case Temperature: 194°F, 90°C

APPROVALS:

- UL & cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

PHYSICAL DIMENSIONS:

Length (L):	6.46"
Width (W):	1.89"
Height (H):	1.42"
Mounting (M):	6.00"
Lead Length:	
White	30"
Black	14"
Blue	19"
Red	32"
Yellow	

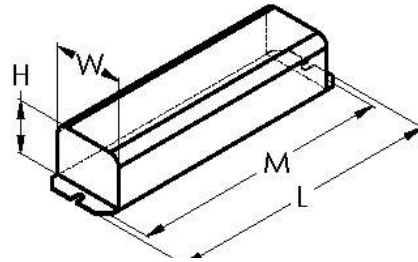

WIRING DIAGRAM:

