



LED Highbay

145HB/LED/850/D WB UDL BB G2 4/1


Philips LED high bay lamps are a direct replacement for 250W to 400W metal halide lamps which will deliver substantial energy savings. Available in both plug-and-play (UL Type A) and MainsFit (UL Type B) options, Philips LED HighBays delivers bright, clean light for a fraction of the energy used by conventional HID.

Product data

General Information	
Base	EX39 [Exclusionary Mogul Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	120 °
Initial lumen (Nom)	20000 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	137.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	145 W
Lamp Current (Nom)	1450 mA
Wattage Equivalent	250 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)		0.5 s
UL Type		HIB_UL Type B (UL Listed+Classified)
Power Factor (Nom)		0.9
Voltage (Nom)		120-277 V
Temperature		
T-Case Maximum (Nom)		60 °C
Controls and Dimming		
Dimmable		Only with specific dimmers
Mechanical and Housing		
Bulb Finish		Clear
Bulb Shape		Others
Product Data		
Order product name		145HB/LED/850/D WB UDL BB G2 4/1
EAN/UPC - Product		046677563967
Order code		563964
Numerator - Quantity Per Pack		1
Numerator - Packs per outer box		4
Material Nr. (12NC)		929002496304
Net Weight (Piece)		1.250 kg


Dimensional drawing




TForce HB MV D 200-145W EX39 850 WB UDL

Product	D	C
145HB/LED/850/D WB UDL BB G2 4/1	250 mm	295 mm

Photometric data




General Uniform Light
NA 1 x 145 HB LED EX39 850 WB UDL

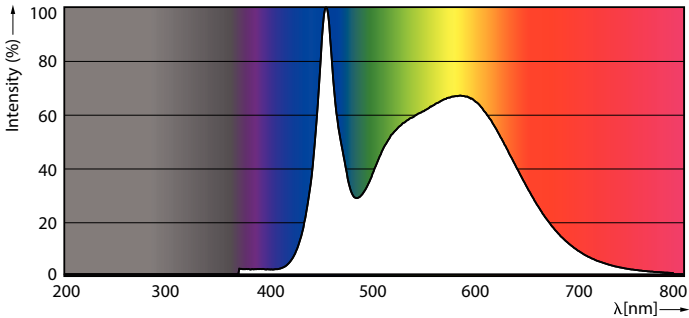

LEDTForce HB 145W Others EX39 850 120D-GUL


LEDTForce HB 145W Others EX39 850-POC




LEDTForce HB 145W Others EX39 120D-LDD

LED Highbay

Lifetime

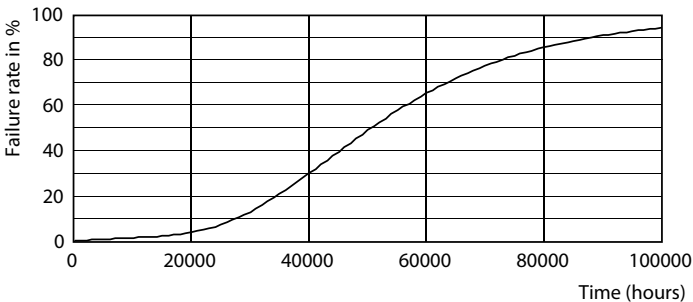

50K

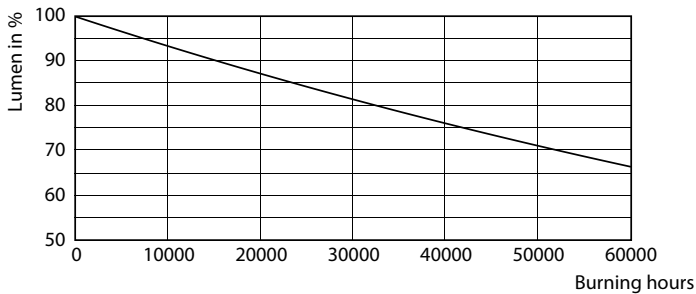

50K

