


# ProLED Volumetric Panel Light Series



## Specifications

- Available in 1' x 4', 2' x 2' and 2' x 4' for recessed installations
- Specification grade architectural high-end appearance
- Rated for dry locations and non-IC applications
- Premium milk white lens
- Integrated driver multiple knockouts for easy access
- Fast access terminal block for easy thru-wire
- White powder coated steel housing
- Lightweight
- 0-10V dimming standard
- 50,000 hour life, up-to 2 times longer than standard T8 Fluorescent
- 3500K, 4000K and 5000K CCT
- 82 CRI for quality and consistent color rendering
- Quiet & flicker-free LED technology
- 5-Year Limited Warranty

## Markets & Applications

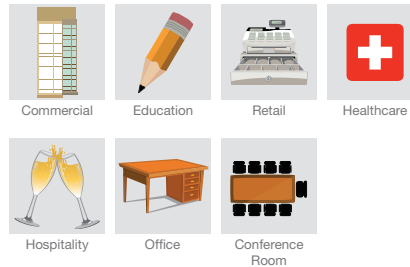

## Ordering Information




Watt	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	Beam Spread	Weight
<b>2' x 2'</b>										
42 Watt	80921	22TFR42/835/LED	120~277V	3500K	82	3570	50000	1	120°	9 lbs.
42 Watt	80904	22TFR42/840/LED	120~277V	4000K	82	3600	50000	1	120°	9 lbs.
42 Watt	80905	22TRF42/850/LED	120~277V	5000K	82	3650	50000	1	120°	9 lbs.
<b>2' x 4'</b>										
55 Watt	80923	24TFR55/835/LED	120~277V	3500K	82	4675	50000	1	120°	16.5 lbs
55 Watt	80906	24TFR55/840/LED	120~277V	4000K	82	4750	50000	1	120°	16.5 lbs
55 Watt	80907	24TFR55/850/LED	120~277V	5000K	82	4800	50000	1	120°	16.5 lbs
<b>1' x 4'</b>										
42 Watt	80922	14TFR42/835/LED	120~277V	3500K	82	3570	50000	1	120°	9.5 lbs
42 Watt	80913	14TFR42/840/LED	120~277V	4000K	82	3640	50000	1	120°	9.5 lbs
42 Watt	80914	14TFR42/850/LED	120~277V	5000K	82	3750	50000	1	120°	9.5 lbs

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to operate past this point at decreased light levels. May not be compatible with all dimming systems, dimming performance may vary by system.


# ProLED Volumetric Panel Light Series

## Dimensions

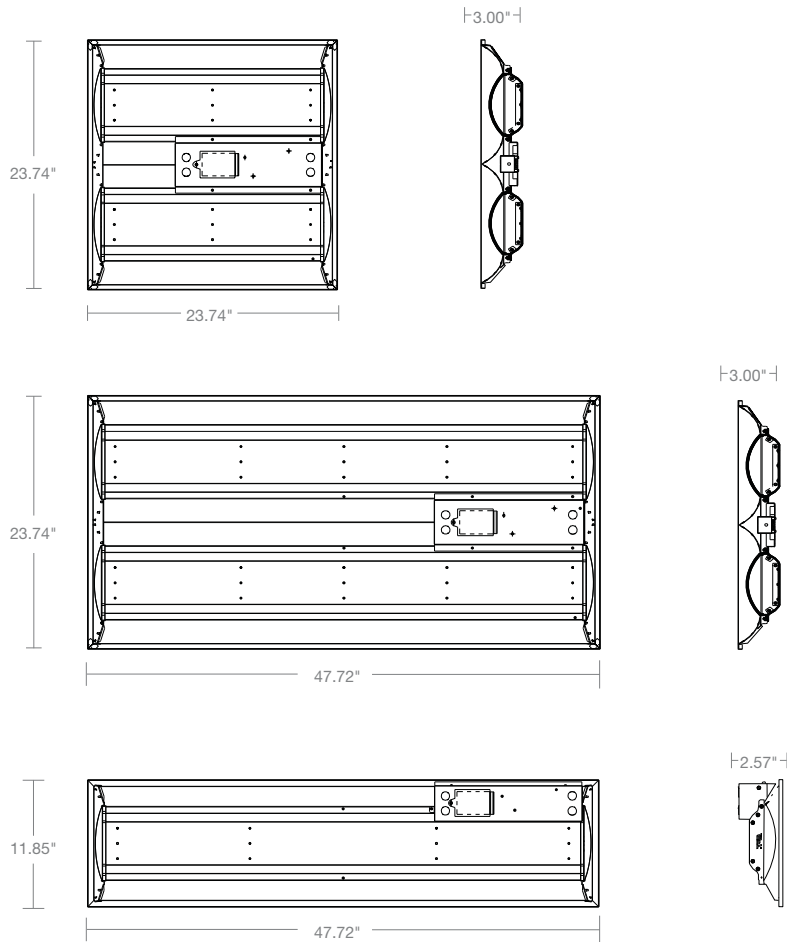


## Photometrics

80904, 22TFR42/840/LED

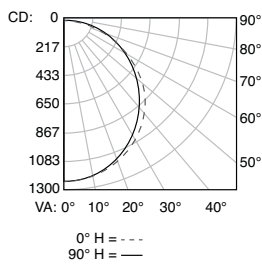

80906, 24TFR55/840/LED

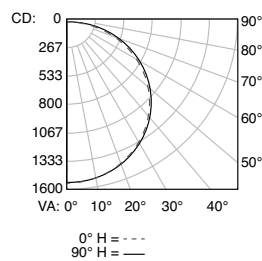

80913, 14TFR42/840/LED

