



T8

15.5T8-6U/COR/24-830/MF20/G 10/1


Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

Product data

General Information			
Base	2G13 [2G13]	Lamp Current (Max)	140 mA
Nominal Lifetime (Nom)	50000 h	Lamp Current (Min)	63 mA
Switching Cycle	50000X	Starting Time (Nom)	0.9 s
B50L70	50000 h	Warm Up Time to 60% Light (Nom)	0.9 s
		Power Factor (Nom)	0.9
		Voltage (Nom)	120-277 V
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	180 °	T-Ambient (Min)	-20 °C
Initial lumen (Nom)	2000 lm	T-Storage (Max)	65 °C
Luminous Flux (Rated) (Nom)	2000 lm	T-Storage (Min)	-40 °C
Rated Beam Angle	180 °	T-Case Maximum (Nom)	51 °C
Correlated Color Temperature (Nom)	3000 K		
Color Consistency	<6	Controls and Dimming	
Color Rendering Index (Nom)	82	Dimmable	No
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Mechanical and Housing	
Input Frequency	50 to 60 Hz	Product Length	600 mm
Power (Rated) (Nom)	15.5 W		

Approval and Application	
Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance DLC compliance
DesignLights Consortium Qualified Product List	DesignLights Consortium Qualified Product List
Product Data	
Order product name	15.5T8-6U/COR/24-830/MF20/G 10/1

Dimensional drawing

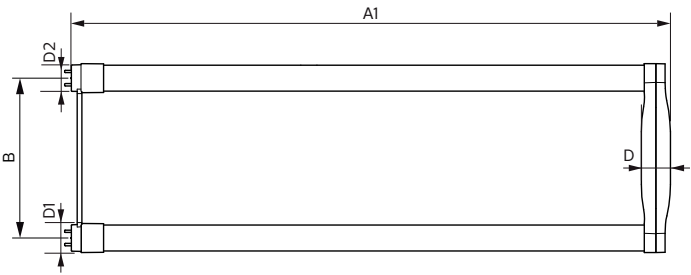


TLED MF CorePro U bent 2000lm 3000K


EAN/UPC - Product	046677535537
Order code	535534
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001934604
Net Weight (Piece)	0.230 kg
Model Number	9290019346

Product	D1	D2	B	A1	D
15.5T8-6U/COR/24-830/ MF20/G 10/1	25.7 mm	28.1 mm	152 mm	570 mm	27.9 mm

Photometric data

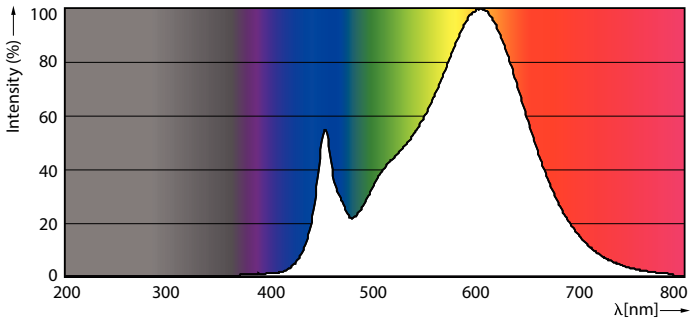


15-5W 2G13




15-5W 2G13 830 3000K

Photometric data




15-5W 2G13 830 3000K


Lifetime

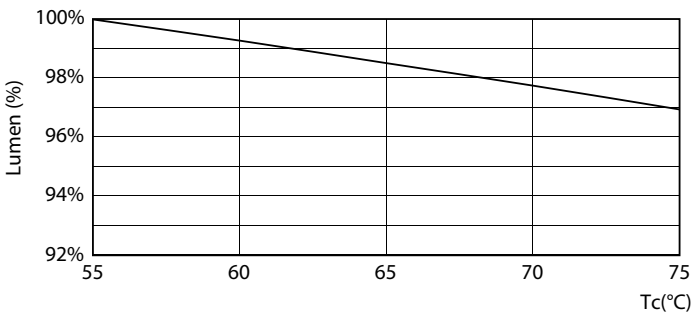


15-5W 2G13

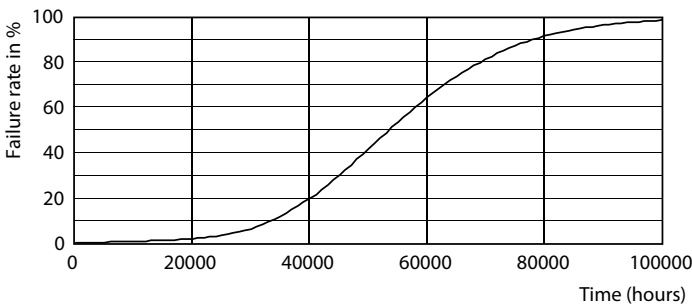

8-5W G13

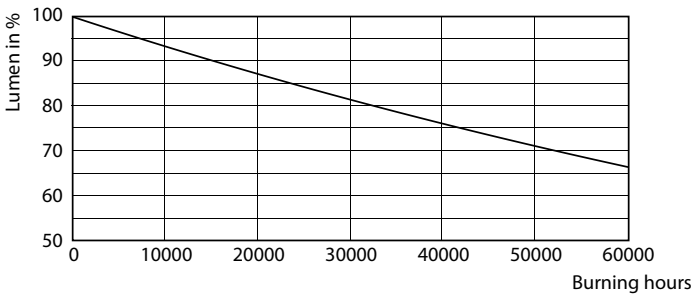


8-5W G13

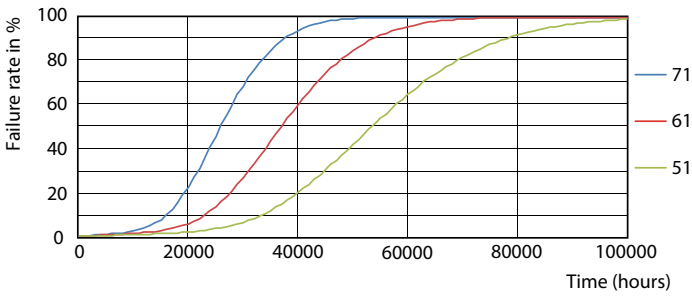

15-5W 2G13

Lifetime

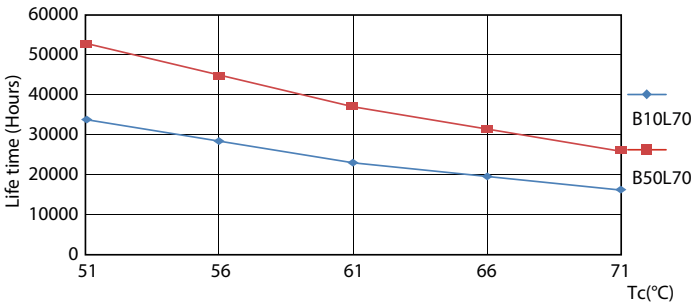

15-5W 2G13

