



# LED BR30

## 15BR30/PER/927-22/E26/WG/HO 4/1FB T20


Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.

### Product data

General Information			
Base	E26 [ Single Contact Medium Screw]	Starting Time (Nom)	0.5 s
EU RoHS compliant	Yes	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	15000 h	Power Factor (Nom)	0.7
Switching Cycle	50000X	Voltage (Nom)	120 V
Technical Type	15-100W	Temperature	
Light Technical		T-Case Maximum (Nom)	95 °C
Color Code	927-922 [ CCT of 2700K-2200K]	Controls and Dimming	
Beam Angle (Nom)	110 °	Dimmable	Yes
Initial lumen (Nom)	1400 lm	Mechanical and Housing	
Color Designation	Warm Glow(WG)	Bulb Finish	Frosted
Correlated Color Temperature (Nom)	2700 2200 K	Bulb Shape	BR30
Luminous Efficacy (rated) (Nom)	93.00 lm/W	Product Data	
Color Consistency	<4	Order product name	15BR30/PER/927-22/E26/WG/HO 4/1FB T20
Color Rendering Index (Nom)	90	EAN/UPC - Product	046677558024
LLMF At End Of Nominal Lifetime (Nom)	70 %	Order code	558023
Operating and Electrical		Numerator - Quantity Per Pack	1
Input Frequency	60 Hz	Numerator - Packs per outer box	4
Power (Rated) (Nom)	15 W	Material Nr. (12NC)	929002351403
Lamp Current (Nom)	125 mA	Net Weight (Piece)	0.008 kg
Wattage Equivalent	100 W		

LED BR30


Dimensional drawing




BR30 100W WG

Product	D	C
15BR30/PER/927-22/E26/WG/HO 4/1FB T20	94 mm	130 mm


Photometric data



LEDbulb BR30 E26 1400lm FR




LEDbulb 15W BR30 E26 927 922 FR

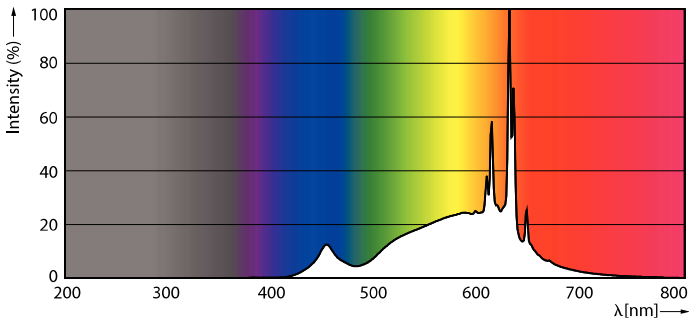


LEDbulb 15W BR30 E26 927 922 FR

LED BR30

Lifetime

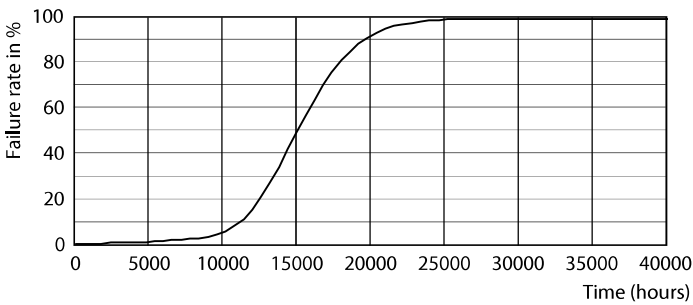

15K LED

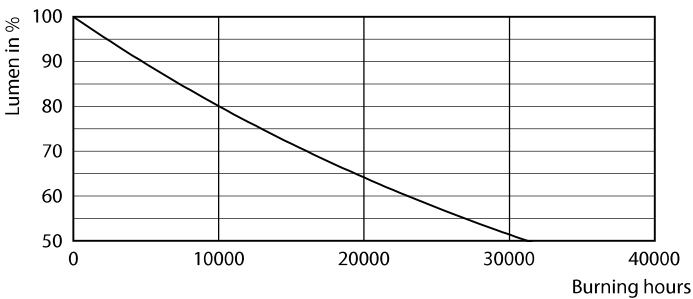

15K LMP

