

Presented By: Candela Corporation
Contact Phone: 800-922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

27532 - 1665

GE S8 - Aircraft; Low Voltage

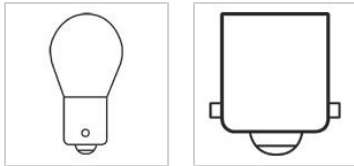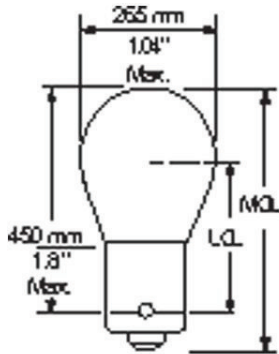

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Single Contact Bayonet (BA15s)
Filament	C-2V
Rated Life (MIN)	22.0 h
Rated Life (Vert)	1000.0 h
Rated Life (NOM)	1000.0 h
Rated Life (Hor)	22.0 h
Atmosphere	Gas-filled
Primary Application	Aircraft; Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	264.0
Initial Lumens (NOM)	264.0
Initial Lumens (Hor)	12.0
Nominal Initial Lumens per Watt (NOM)	12.0
Center Beam Candlepower (CBCP) (NOM)	264.0
Mean Spherical Candlepower (MSCP) (NOM)	21.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	22.0
Voltage (MIN)	1000.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.120 in(28.4 mm)

PRODUCT INFORMATION

Product Code	27532
Description	1665
ANSI Code	1665
Standard Package	Case
Standard Package GTIN	20043168275327
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168275323