

Presented By: Candela Corporation
Contact Phone: 800-922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

27557 - 1683

GE S8 - Aircraft; Low Voltage

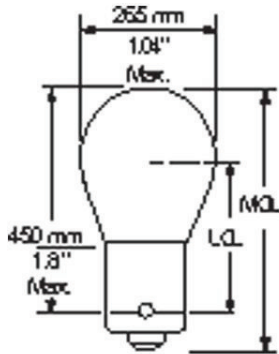

GENERAL CHARACTERISTICS

Lamp Type	Miniature - S Shape
Bulb	S8
Base	Single Contact Bayonet (BA15s)
Filament	2C-6
Rated Life (MIN)	29.0 h
Rated Life (Vert)	500.0 h
Rated Life (NOM)	500.0 h
Rated Life (Hor)	29.0 h
Atmosphere	Gas-filled
Primary Application	Aircraft; Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	402.0
Initial Lumens (NOM)	402.0
Initial Lumens (Hor)	13.86207
Nominal Initial Lumens per Watt (NOM)	13.86207
Center Beam Candlepower (CBCP) (NOM)	402.0
Mean Spherical Candlepower (MSCP) (NOM)	32.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	29.0
Voltage (MIN)	500.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.000 in(50.8 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

PRODUCT INFORMATION

Product Code	27557
Description	1683
ANSI Code	1683
Standard Package	Case
Standard Package GTIN	20043168275570
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168275576