

PL V 9.5W DIR TITANIUM LED SERIES



PRO





9.5W REPLACES



**26W
CFL**

60% Energy Savings

- Easy to install - Plug & Play Direct
- Ballast smart control technology
- Exceptional efficacy 107 LPW
- Dimmable on 0-10V circuits
- Compatible with most electronic ballasts
- Available in 2700K, 3000K, 3500K & 4000K CCT



PL PRODUCT FEATURES

High Performance - Ballast Smart Control


The PL DIR lamp's ballast smart control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W, 32W and 42W CFL PL lamps.

Ballast Type	Lumens	Bare Lamp
13W	590	5W
18W	820	6W
26W	1020	9.5W

Innovative Round Design - Patent Pending



GREEN CREATIVE PL V LED Lamp




Other PL V LED Lamp

The PL V lamp features a patent pending fully round design. Compared to other square shaped PL vertical lamps, the GREEN CREATIVE PL V improves the overall light output and aesthetics of the fixture.


PL V 9.5W DIR TITANIUM LED SERIES

APPLICATIONS

Retail

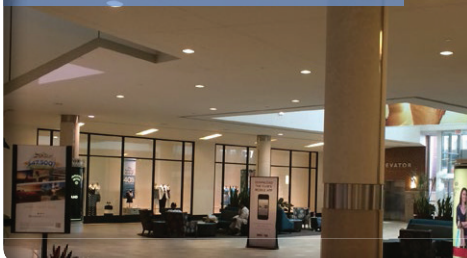


Hospitality

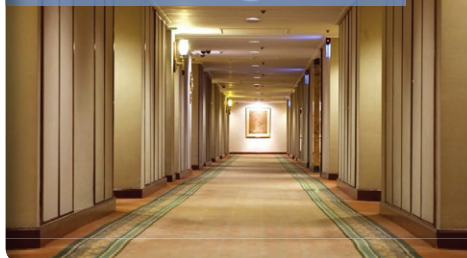

Office



Base: G24q & GX24q (4-pin CFL)
Voltage: Ballast compatible 120-277V
Dimmable: Yes
PF: 0.9
Lifetime (L70): 50,000 hrs
Weight: 0.20lb / 91g

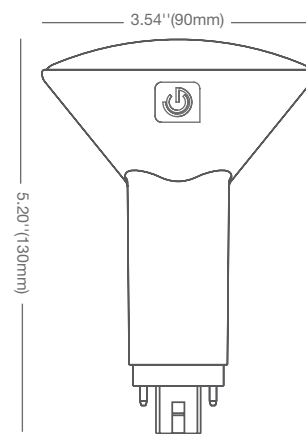

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
9.5PLV/827/DIR	28374	9.5	Soft White 2700K	82	950	100	120°
9.5PLV/830/DIR	28375	9.5	Warm White 3000K	82	1000	105	120°
9.5PLV/835/DIR	28376	9.5	Neutral White 3500K	82	1000	105	120°
9.5PLV/840/DIR	28377	9.5	Cool White 4000K	82	1020	107	120°

BALLAST PERFORMANCE

Ballast Type	Bare Lamp (W)	System (W)	2700K Lumens	3000K Lumens	3500K Lumens	4000K Lumens
13W	5	6.7	520	540	540	590
18W	6	8	720	760	760	820
26W	9.5	11.9	950	1000	1000	1020
42W	10	12.5	1050	1100	1100	1150

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website