
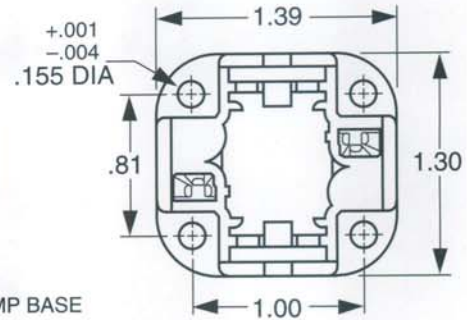


G24d, GX24d, G24q, GX24q

285, 285A

FOUR HOLE MOUNT
2 PIN LAMPS

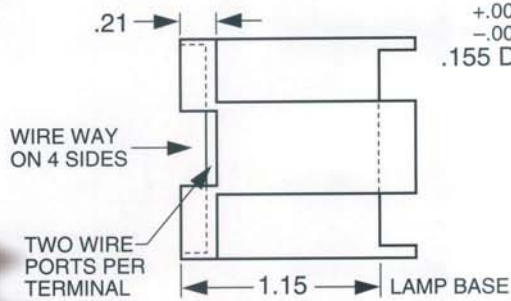


WATTS	PIN	BASE	LAMPHOLDER	W/O WIREWAY
13	2	G24d-1, GX24d-1	285-D1	285A-D1
18	2	G24d-2, GX24d-2	285-D2	285A-D2
26, 32	2	G24d-3, GX24d-3	285-D3	285A-D3

NOTE: USE 285A SERIES FOR APPLICATIONS REQUIRING UNEXPOSED WIRE LEADS


285, 285A

FOUR HOLE MOUNT
4 PIN LAMPS



ADDITIONAL CONTACTS ARE SINGLE WIRE PORT

POST PREVENTS TWO PIN LAMP INSERTION UP TO 42W






INTEGRAL KEYING FOR 57W AND 70W

WATTS	PIN	BASE	LAMPHOLDER	W/O WIREWAY
10, 13	4	G24q-1, GX24q-1	285-Q1	285A-Q1
18	4	G24q-2, GX24q-2	285-Q2	285A-Q2
26, 32	4	G24q-3, GX24q-3	285-Q3	285A-Q3
42	4	GX24q-4	285-Q4	285A-Q4
57	4	GX24q-5	285-Q5	285A-Q5
70	4	GX24q-6	285-Q6	285A-Q6
26, 32, 42	4	G24q, GX24q-3, 4	285-QX	285A-QX

NOTE: ALL DIMENSIONS SAME AS 2 PIN LAMP HOLDERS EXCEPT AS SHOWN

285-BS

BASE SNAP-IN MOUNT
2 PIN LAMPS

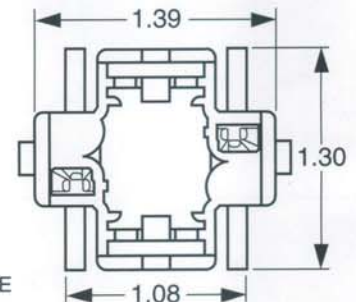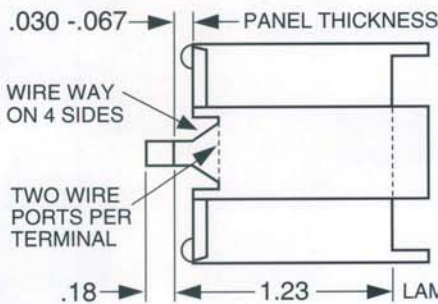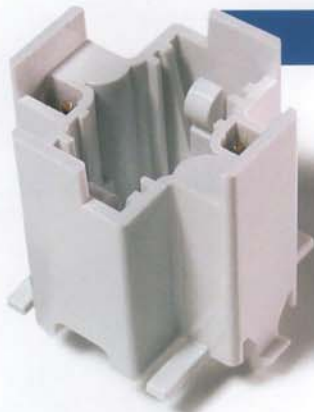


WATTS	PIN	BASE	LAMPHOLDER
13	2	G24d-1, GX24d-1	285-D1-BS
18	2	G24d-2, GX24d-2	285-D2-BS
26, 32	2	G24d-3, GX24d-3	285-D3-BS

USE PANEL CUTOUT #8


285-BS

BASE SNAP-IN MOUNT
4 PIN LAMPS

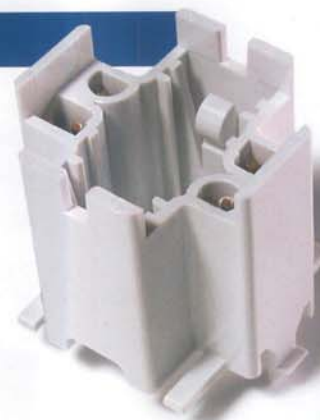

ADDITIONAL CONTACTS ARE SINGLE WIRE PORT

POST PREVENTS TWO PIN LAMP INSERTION



WATTS	PIN	BASE	LAMPHOLDER
10, 13	4	G24q-1, GX24q-1	285-Q1-BS
18	4	G24q-2, GX24q-2	285-Q2-BS
26, 32	4	G24q-3, GX24q-3	285-Q3-BS
42	4	GX24q-4	285-Q4-BS
26, 32, 42	4	G24q, GX24q-3, 4	285-QX-BS

NOTE: ALL DIMENSIONS SAME AS 2 PIN LAMP HOLDERS EXCEPT AS SHOWN

USE PANEL CUTOUT #8