

Ш

SPECIFICATION SHEET : BA-120-115-CT8

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast, * Meets Energy Star 4.0 Criteria For Applications Listed.

This Ballast Will Operate Following Lamps.


飞

E15T0

F15T8

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%,	50/60Hz		1						
LAMP WATTS/TYPE	F15T8	-	-	-	-	-	-	-	-
LAMPS OPERATED	1								
INPUT WATTS	18								
LINE CURRENT:	0.28								
POWER FACTOR	0.55								
BALLAST FACTOR	1.18								
EFFICACY FACTOR	6.38								
THD	144.4%								
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-A (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	NONE								
MIN. OPERATING TEMP	-10 0C (14 0 F)								
MAX. CASE TEMP	75 °C (167 ° F)								
TYPE "CC"	YES								
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR								

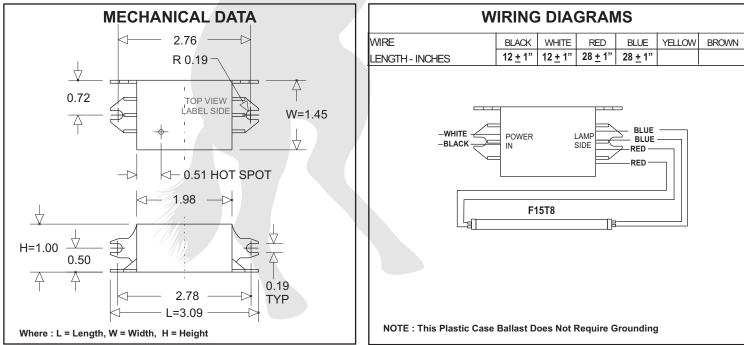

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>2 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>. DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com