

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

20849 - 300PAR56/WFL

GE PAR56 - Wide Flood

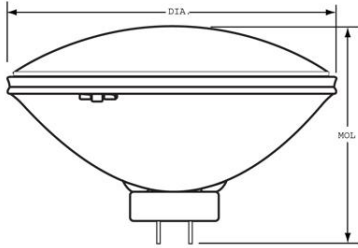

CAUTIONS & WARNINGS

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Use in enclosed fixture rated for this product.
 - Avoid direct water/liquid contact.

NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Mogul End Prong (GX16d)
Filament	CC-13
Wattage	300
Voltage	120
Rated Life	2000 hrs
Primary Application	Wide Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	3840
Beam Spread - Horizontal	57.0 - 10.0 °/37.0 - 50.0 °
Beam Spread - Vertical	27.0 - 10.0 °/18.0 - 50.0 °
Center Beam Candlepower (CBCP)	11000
Color Temperature	2750 K
Nominal Initial Lumens per Watt	12

DIMENSIONS

Maximum Overall Length (MOL)	5.0000 in(127.0 mm)
Bulb Diameter (DIA)	7.000 in(177.8 mm)
Bulb Diameter (DIA) (MAX)	7.000 in(177.8 mm)

PRODUCT INFORMATION

Product Code	20849
Description	300PAR56/WFL
Standard Package	Case
Standard Package GTIN	10043168208496
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168208499