

# LUNERA LED T8 LAMP

## LED Replacement for Bi-Pin 4ft T8 Fluorescent Lamp



### Description

The Lunera LED T8 Lamp is a plug-and-play LED replacement for a 32W, 4ft Medium Bi-Pin T8 fluorescent lamp. The Lunera LED T8 Lamp operates off of the existing electronic ballast and supports instant start, rapid start, and programmed start electronic ballasts.

This beautiful lamp emits light over 330° of its surface, has a Color Rendering Index (CRI) of 83 and delivers up to 1,800 lumens of usable light. The Lunera LED T8 Lamp is available in 3000K, 3500K, 4000K and 5000K color temperatures.

The long lifespan of the Lunera LED T8 Lamp is rated at 50,000 hours; and it is supported by a five year warranty.

The Lunera LED T8 Lamp delivers over 50% energy savings.

The Lunera LED T8 Lamp does NOT support line voltage.



### Features

- Directly replaces 32W 4ft Bi-Pin T8 fluorescent lamps with 14W LED lamps
- Supports plug-and-play ballast-driven installation (Instant Start/Rapid Start/Programmed Start)
- Delivers up to 1,800 lumens of usable light
- >80 CRI
- CCT 3000K, 3500K, 4000K and 5000K
- 50,000 hours life to L70 5-Year Warrant

### Ordering Information

Example: HN-T8-D-48-14W-830-G1

Series	Socket Type	Power Supply	Dimension	Lamp Wattage Replaced	CCT	Generation
HN Lunera LED T8 Lamp	T8 Fixture with medium, Bi-Pin T8 socket	D Installed Instant Start Electronic Ballast (10W~32W)	48 48 inch tube	14W Replaces 32W Medium Bi-Pin T8 Fluorescent Lamp	830 3500 Kelvin 835 3500 Kelvin 840 4000 Kelvin 850 5000 Kelvin	G1 1st Generation

PROJECT	CONTACT	MODEL NO.
REFERENCE NO.	QUANTITY	DATE

## Product Specifications

### Illumination

Color Temperatures	2700K, 3000K, 3500K, 4000K
Delivered Lumens:	Up to 1,800lm
CRI	>80
Color Consistency	Lunera TruColor™ Proprietary Process
Lumen Maintenance (L70)	50,000+ hours life

### Electrical System

Power Factor	> 90%
Total Harmonic Distortion	< 20%
Input Voltage	Dependent of the ballast (Lamp operates off of rapid, instant, and programmed start electronic ballasts)
Average Lamp Power	14W
Total Power (Lamp + Ballast)	14W + 2W for ballast*
Lamp Wattage Replaced	32W + 2W for ballast
Dimming	Yes, If used with dimming ballast
Ballast Factor	Ballast Factor <1. The Lunera LED T8 Lamp will respond to Low Ballast Factor (LBF) and Normal Ballast Factor (NBF) electronic ballasts the same way as a fluorescent T8 lamp; ratings above are for a NBF ballast. The Lunera LED T8 Lamp is not rated for use with High Ballast Factor (HBF) ballasts.

### Physical

Weight	0.75 lbs
Housing and Finish	Glass, White
Optics	Optical Glass Diffusion, 330° Beam

### Environment

Ambient Operating Temp	-40°F to 100°F (-40°C to 40°C)
Ambient Operating Humidity	Dry and Damp Certified

### Installation

Socket Type	Medium Bi-Pin T8 socket (10W~32W electronic ballast)
Line Voltage	No, this lamp is NOT approved for use with line voltage.


### Certifications & Qualifications

UL	Listed (UL1993)
RoHS Compliant	Contains no lead or mercury
DLC Listed	Yes
LM79, LM80, IES Files	Available. Contact Lunera.

### Warranty

Warranty	5 years
----------	---------

## Dimensions

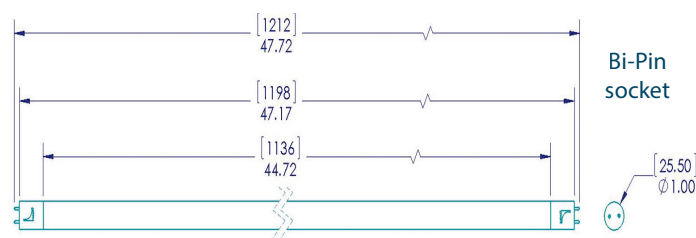

## Application Notes

### CAUTION

Turn power off when installing the lamp.

The Lunera LED T8 Lamp may be used in open and 2-lamp IP67 rated enclosed fixtures. Indoors or outdoors.

For applications containing dimming ballasts, please contact Lunera for specific compatibility.

CAUTION - IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT MANUFACTURER.

For FAQ and Technical Support:  
<https://lunera.freshdesk.com/support/home>

© 2015 Lunera Lighting, Inc. All Rights Reserved. Lunera and the Lunera logo are registered trademarks; Lunera TruColor and Thermal IQ, are trademarks of Lunera Lighting, Inc. All other trademarks are the property of their respective owners. Specifications are subject to change without notice. This document is for informational purposes only.

\*System power consumption associated with instant start electronic ballast.