

**Presented By:** Candela Corporation  
**Contact Phone:** (800) 922-9226  
**Contact E-mail:** sales@candelacorp.com



**Customer Name:**  
**Project Name:**  
**Fixture Type:**



GE  
Lighting

**24795 - 4551**

GE PAR46 - Aircraft

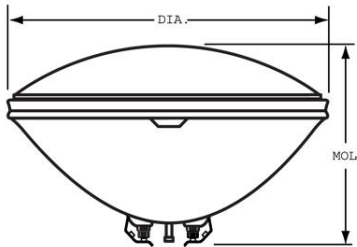

#### GENERAL CHARACTERISTICS

|                     |                   |
|---------------------|-------------------|
| Lamp Type           | Sealed Beam - PAR |
| Bulb                | PAR46             |
| Base                | Screw Terminals   |
| Filament            | CC-6              |
| Wattage             | 250               |
| Voltage             | 28                |
| Rated Life          | 25 hrs            |
| Primary Application | Aircraft          |

#### PHOTOMETRIC CHARACTERISTICS

|                              |               |
|------------------------------|---------------|
| Beam Spread - Horizontal     | 50.0 - 10.0 ° |
| Beam Spread - Vertical       | 10.0 - 10.0 ° |
| Max. Beam Candlepower (MBCP) | 75000         |

#### DIMENSIONS

|                              |                    |
|------------------------------|--------------------|
| Maximum Overall Length (MOL) | 3.7500 in(95.2 mm) |
| Bulb Diameter (DIA)          | 5.750 in(146.0 mm) |
| Bulb Diameter (DIA) (MAX)    | 5.750 in(146.0 mm) |

#### PRODUCT INFORMATION

|                                  |                |
|----------------------------------|----------------|
| Product Code                     | 24795          |
| Description                      | 4551           |
| ANSI Code                        | 4551           |
| Standard Package                 | Case           |
| Standard Package GTIN            | 10043168247952 |
| Standard Package Quantity        | 12             |
| Sales Unit                       | Unit           |
| No Of Items Per Sales Unit       | 1              |
| No Of Items Per Standard Package | 12             |
| UPC                              | 043168247955   |