

4

3


DWG NO. 1001505

REV 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

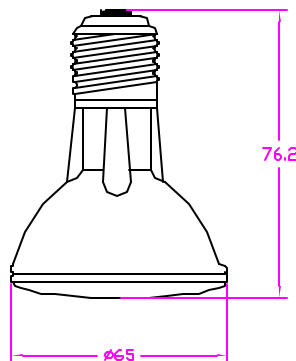

76.2

Ø65

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 300°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	120 V
WATTAGE	50 W
LUMENS	525 Lm
BEAM ANGLE	12°
BEAM SPREAD	SPOT
CENTER BEAM	4200 op
Avg LIFE	2500 HRS
BASE TYPE	E-26 MEDIUM
BURN POSITION	ANY

NEXT ASSY

USED ON

APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			CONTRACT NO.		
DECIMALS .X ± .XX ± .XXX ±			APPROVALS		
ANGLES ±			DATE		
DRILLED HOLES PER AND 10387			DRAWN		
REMOVE BURRS AND SHARP EDGES			R.AMPARD		
ALL DIMENSIONS AFTER PLATING			09/27/99		
MATERIAL			CHKD		
COMPOSITE			D.GILCZYNSKI		
FINISH			ENGR		
			09/27/99		
			FPG		
			QUAL		
			USION ACTVY		
			DDVT ACTVY		
			SCALE		
			NONE		
			WEIGHT		
			SHEET		
			1 OF 1		

USHIO AMERICA, INC.

10550 Camden Dr. Cypress, CA 90630

50PAR20/SP
HALOGEN PAR LAMP

1001505

4

3

2

1

CAD