

HP2627P • HP2627PBL5

Ballast Type: Electromagnetic
 Input Voltage: 277VAC +5%,-10%
 Input Frequency: 60 Hz.

Starting Method: Preheat
 Lamp Connection: Series
 Unit Color: Black

Unit Weight 1.95 lb.
 Carton Quantity: 24
 Skid Quantity: 1440

ELECTRICAL SPECIFICATION:

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Ballast Factor	Wiring Diagram	B.E.F.
277	CFQ26W/G24d, CFTR26W/GX24d	26	1	0.10	28	≥ 0.97	≤ 25	≤ 1.7	0.93	102	3.32
277	CFS28W/GR8	28	1	0.12	30	≥ 0.96	≤ 25	≤ 1.7	0.91	102	3.03

PERFORMANCE:

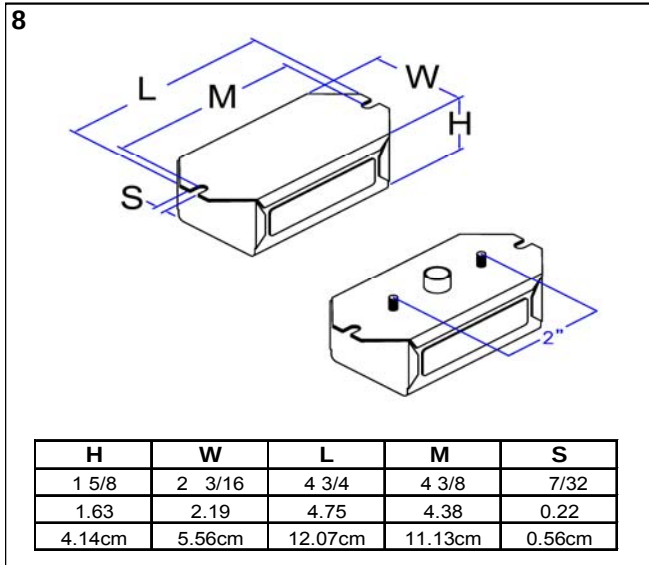
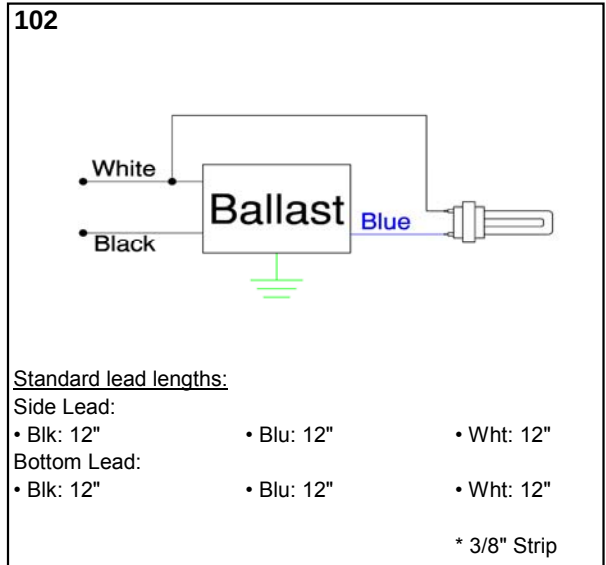
- Electromagnetic lead type ballast
- Preheat start
- Series operation
- High power factor
- Encased & potted
- Sound rated A
- Meets ANSI C82.1

APPLICATION:

- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 25°F/-4°C
- Remote mounting: 10 ft.

SAFETY:

- UL listed (Class P, Type HL, Type 1 outdoor)
- CSA/C22.2 Certified
- Automatic reset thermal protector
- No PCB's
- RoHS Compliant

STYLE:

WIRING DIAGRAM:

WARRANTY

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide's ballasts, call 1-800-323-5633 or visit www.robertsonww.com. Specifications subject to change without notice.

Revised 02/17/15

ROBERTSON WORLDWIDE

 4700 137th Street, Crestwood, IL 60445, TEL: 1-800-323-5633, FAX: 1-877-388-2420, www.RobertsonDirect.com