


Ordering Information and Dimensions


Reflector Lamps for Series Operation at 6.6A (Operating Position: any)

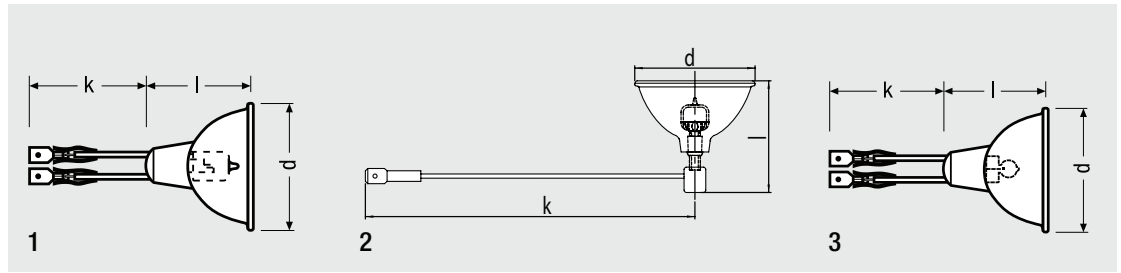

Item Number	Ordering Abbreviation	Wattage (W)	Average Life (h)	Axial Luminous Intensity Min. (kcd)	(d) Diameter (mm)	(l) Length (mm)	(k) Min. Cable Length (mm)	Connector	Figure	Standard Case Qty
58938	6.6A/30MR16/64331AC/FL	30	1000	4.3	50.4	48	125	female, male	1	20
58964	6.6A/30MR16/64331A/FL	30	1000	4.3	50.4	48	125	female	1	20
58506	6.6A/30MR16/64331A/SP	30	1000	18	50.4	48	125	female	1	20
58899	6.6A/40MR11/64333A	40	1500	12.7	35.3	37	125	female	1	20
58889	6.6A/40MR11/64333B	40	1500	12.7	35.3	37	125	female round	1	20
*	6.6A/40MR11/64333C 40-15	40	1500	12.7	35.3	37	125	male	1	20
58907	6.6A/45MR16/64337A 45-15	45	1500	21	50.4	45	125	female	1	20
58908	6.6A/45MR16/64337B 45-15	45	1500	21	50.4	45	125	female round	1	20
58891	6.6A/48MR16/64337A 48-15	48	1500	23	50.4	45	125	female	1	20
*	6.6A/48MR16/64337B 48-15	48	1500	23	50.4	45	125	female round	1	20
*	6.6A/48MR16/64337C 48-15	48	1500	23	50.4	45	125	male	1	20
59070	6.6A 64337 IRC-A 48-30	48	3000	23	50.4	45	125	female	3	20
59071	6.6A 64337 IRC-C 48-30	48	3000	23	50.4	45	125	male	3	20
58894	6.6A/48MR16/64338AC	48	1000	27	50.4	45	125	female, male	1	20
58493	6.6A/62MR16/64336A	62	1500	31.5	50.4	45	125	female	1	20
58953	6.6A/105MR16/64339A	105	1000	32	50.4	48	125	female	2	20
58960	6.6A/105MR16/64339AC	105	1000	32	50.4	48	125	female, male	2	20
58961	6.6A/105MR16/64339B	105	1000	32	50.4	48	125	female round	2	20
58963	6.6A/105MR16/64339C	105	1000	32	50.4	48	125	male	2	20

* Available upon special request.

PK30d Base Lamps for Series Operation at 6.6A (Operating Position: s90 / vertical-to-horizontal, base down)

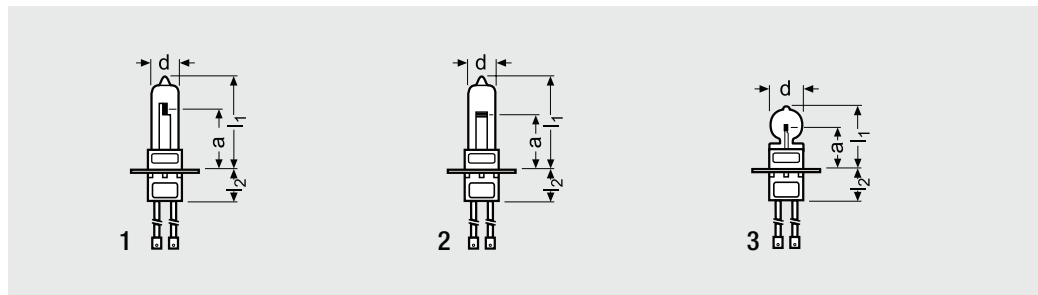

Item								Filament	(a)	(d)	(l1)	(l2)			
Number	Ordering	Abbreviation	LFI	Wattage	Average	Luminous	Connector	Filament	Dimension	Distance	Diameter	Length	Length	Standard	
				(W)	Life (h)	Flux (lm)			w x h (mm)	(mm)	(mm)	(mm)	(mm)	Figure	Case Qty
58910	6.6A	64317C 45-15 PK30D	J1/76	45	1500	800	male	C-8	1.4x3.4	16	13.5	36	20	1	100
58947	6.6A	64317 IRC-C 45-30 PK30D	J1/76	45	3000	800	male	C-8	2.1x2.9	16	15	28	20	3	100
58988	6.6A	64318A 45-15 PK30D	J1/77	45	1500	800	female	C-8	1.4x3.4	16	13.5	30	20	1	100
58989	6.6A	64318Z/C 45-15 PK30D	J1/77	45	1500	800	male	C-8	1.4x3.4	16	13.5	30	20	1	100
59010	6.6A	64319A 45-15 PK30D		45	1500	800	female	C-8	1.4x3.4	20	13.5	34	16	1	100
59011	6.6A	64319Z/C 45-15 PK30D		45	1500	800	male	C-8	1.4x3.4	20	13.5	34	16	1	100
59004	6.6A	64319 IRC-A 45-30 PK30D		45	3000	800	female	C-8	2.1x2.9	20	15	32	16	3	100
*	6.6A	64328 HLX-A 65-15 PK30D		65	1500	1450	female	Cbar-6	3.2x3.2	20	13.5	32	16	2	100
59069	6.6A	64328 HLX-Z/C 65-15 PK30D		65	1500	1450	male	Cbar-6	3.2x3.2	20	13.5	32	16	2	100
59072	6.6A	64341 HLX-A 100-15 PK30D	J1/79	100	1500	2700	female	Cbar-6	5.3x3.0	20	13.5	32	16	2	100
59073	6.6A	64341 HLX-Z/C 100-15 PK30D	J1/79	100	1500	2700	male	Cbar-6	5.3x3.0	20	13.5	32	16	2	100
59074	6.6A	64342 HLX-C 100-15 PK30D	J1/80	100	1500	2700	male	Cbar-6	5.3x3.0	20	13.5	40	16	2	100
59077	6.6A	64361 HLX-A 150-15 PK30D	J1/83	150	1500	3600	female	Cbar-6	7.1x3.6	20	13.5	34	16	2	100
59079	6.6A	64361 HLX-Z/C 150-15 PK30D	J1/83	150	1500	3600	male	Cbar-6	7.1x3.6	20	13.5	34	16	2	100
59080	6.6A	64382 HLX-A 200-15 PK30D	J1/84	200	1500	4800	female	CC-6	6.2x3.9	20	13.5	36	21	2	100
59081	6.6A	64382 HLX-C 200-15 PK30D	J1/84	200	1500	4800	male	CC-6	6.2x3.9	20	13.5	36	21	2	100

* Available upon special request.