

# SORAA® VIVID 2

## LED MR16 2700K 12VAC 10-12W



Narrow Flood and Flood



Narrow Spot



reddot design award  
winner 2013



RoHS

<b>OUTPUT</b>	1200-5700 CBCP, 360-430 Lumens
<b>BEAM</b>	10°, 20°, 25°, 36°
<b>COLOR</b>	CCT: 2700K CRI>95, R9>95
<b>APPLICATION</b>	Halogen replacement for well-ventilated indoor and outdoor applications

### PERFORMANCE

CBCP matches standard halogen lamps  
Single light source  
Single crisp shadow  
Dimmable to 20%  
Power Factor: 0.93  
12V (10.8 min, 13.2 max)

### COLOR

CCT: 2700K  
CRI>95, R9 95  
White point accuracy within 3 SDCM  
Rich saturated color rendering  
Excellent color stability

### OPTIMIZED FORM

ANSI standard MR16 form factor:  
1.96" (50mm) W x 1.86" (47.6mm) H  
Compatible with standard fixtures  
Weight: 40g  
Proprietary fanless aluminum design  
provides superior thermal dissipation

### HIGHLY COMPATIBLE

Works with magnetic and electronic  
transformers and dimmers (see complete  
list at [www.soraa.com](http://www.soraa.com))  
UL and CUL listed for use with 12VAC NEC  
Class 1 and Class 2 systems

### SPECIFICATIONS\*

Reference Number	Product Code	Beam	Field	CBCP	Watts	Halogen Equivalent**	Lumens
MR16-50-B01-12-927-10	00271	10°	20°	5700	10	50W	360 (36.5 lm/W)
MR16-65-B01-12-927-20	00277	20°	38°	2800	11.5	65W	430 (38 lm/W)
MR16-65-B01-12-927-25	00247	25°	42°	2540	11.5	65W	430 (38 lm/W)
MR16-65-B01-12-927-36	00255	36°	60°	1200	11.5	65W	430 (38 lm/W)

\*at stable warm operating conditions (25°C ambient) \*\*Energy Star Minimum

### LONG LIFE, LOW MAINTENANCE

Life of 35,000 hours  
Three year warranty

### ENERGY EFFICIENT

Saves over 80% of energy compared to  
standard halogen lamps  
Typical payback of one year or less

### INTENDED USE AND APPLICATIONS

LED retrofit lamp to replace 12VAC  
halogen MR16 lamps in recessed  
downlights, track lighting, and other  
indoor applications

Not for use with glass lenses or fully  
sealed fixtures

Not for use in unventilated fixtures less  
than 3"L x 3"W x 3"H.

Not for use in Emergency Fixtures or Exit  
Signs

Operating Temperature: Minimum -40°C  
(ambient); Typical: 80-110°C (base);  
Maximum: 125°C (base)

Soraa lamps are designed to safely shut  
down in any thermal environment not  
conductive to minimum airflow or proper  
ventilation

### CERTIFICATIONS

UL, CUL for 12VAC NEC Class 1 and Class  
2 systems, FCC 47 CFR Part 15 and Part 18  
(EMI), RoHS, CE, C-tick

12VAC



2700K

CRI  
>95

R9  
>95



DIM




Form Factor | Base | Voltage | CRI | CCT | Beam  
MR16 - 65 - B01 - 12 - 927 - 25

The diagram at left shows how to read the  
different components of the reference number.  
Base type B01 refers to the GU 5.3 base.


SORAA VIVID 2 MR16 LED 2700K 12VAC 10-12W

PHOTOMETRICS


Narrow Spot - 10°

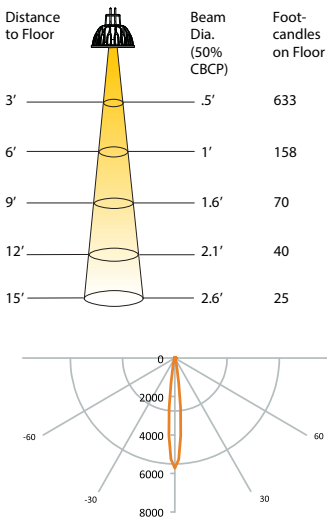


Narrow Flood - 20°

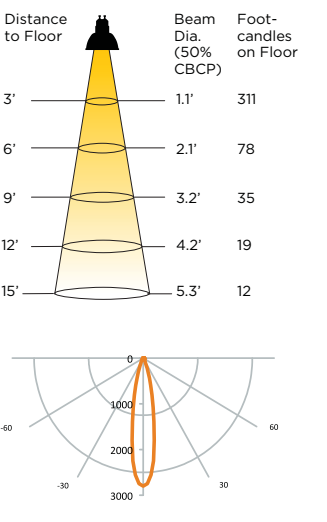


Narrow Flood -25°

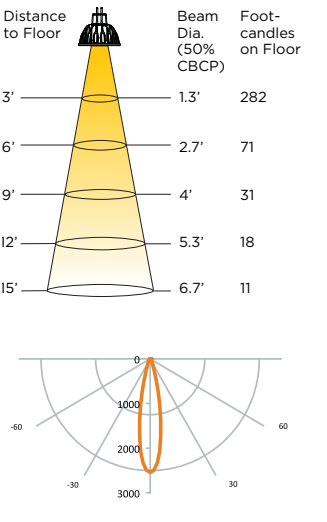



Flood -36°

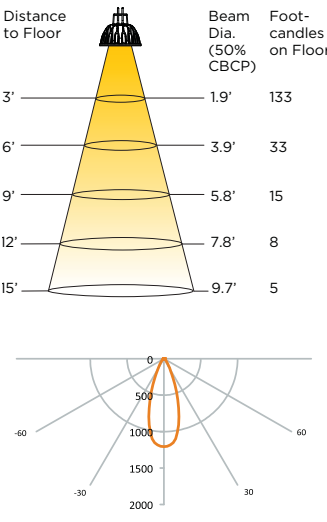

DIMENSIONS

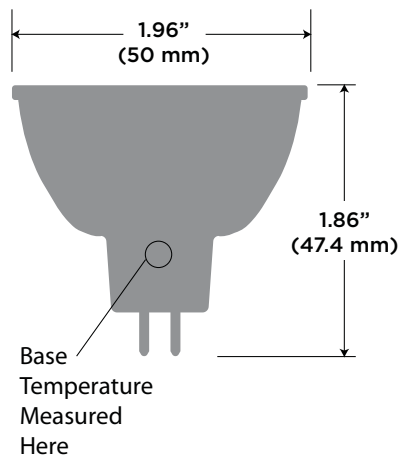

COLOR RENDERING

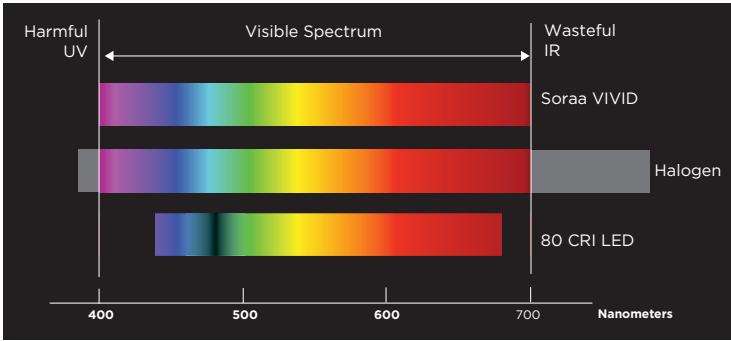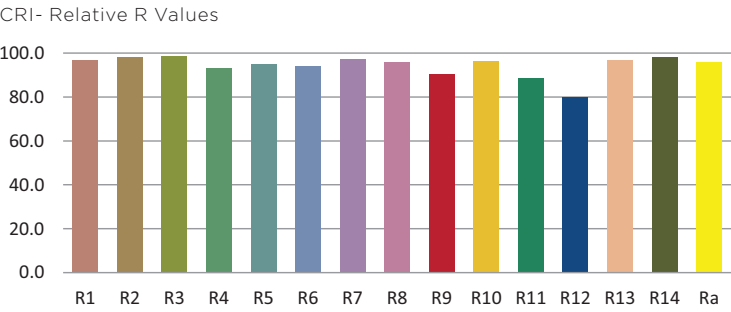

SAFETY NOTE ON HEAT

Soraa's unique LED technology allows its lamps to operate effectively and efficiently at higher temperatures than other LED lamps, resulting in more light output per diode. Although Soraa's lamps operate at cooler temperatures than halogen lamps, it is recommended that gloves be worn when handling bare lamps that have been energized.

TRANSFORMER/DIMMER COMPATIBILITY

Dimmable to 20% or lower, depending on dimmer. Complete transformer and dimmer compatibility information available at [www.soraa.com](http://www.soraa.com).