

LED-4W/350mA

Standards

Converter meets CE standards
Approved by UL as a class 2 recognized component
File # E193999
VDE and VDE EMV approval
IP67

Available Versions

901004350-LED 4W DC 350mA
(European version)
901004350U-LED 4W DC 350mA
(USA version)

Mechanical and Thermal

European version

Dimensions(mm) 45 x 45 x 25
Weight 92.8 grams
Tc Max 70°C
Ta Max 50°C
Output wire – 18AWG 200°C
Input wire – Blue, Brown FEP/FEP
0.75mm² 300/500V 180°C

USA version

Dimensions (in) 1.77 x 1.77 x 0.98
Weight 3.2 ounces
Tc Max 90°C
Ta Max 50°C
Output wire – 18AWG 200°C
Input wire – Blue, Brown UL type 1332
or similar 18 AWG 300V 200°C




Electrical

Load	1-4VA
Input	100-240V 0/50/60Hz
Output current	350mA±8%
Output voltage	2-14V
EMC (RFI)	FCC Class A/EN 55015
Harmonics	EN 61000-3-2
Electrostatic Discharge	IEC61000-4-2
EMC Immunity	IEC61000-4-3
Burst	IEC61000-4-4
Surge	IEC61000-4-5
Injected RF	IEC61000-4-6
Mains interruption	IEC61000-4-11
Immunity	EN 61547/61047
Safety	EN 61347-2-2
SELV	

Protection and Regulation

Electronic internal resettable short circuit protection. Thermal protection and overload regulation.

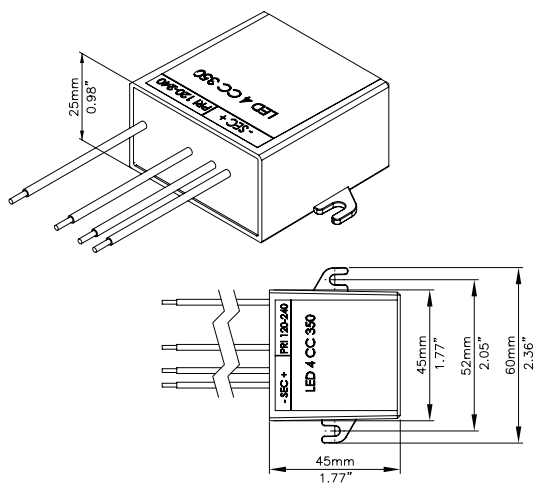


See reverse side for more information →



LED-4W/350mA

Mounting Instructions

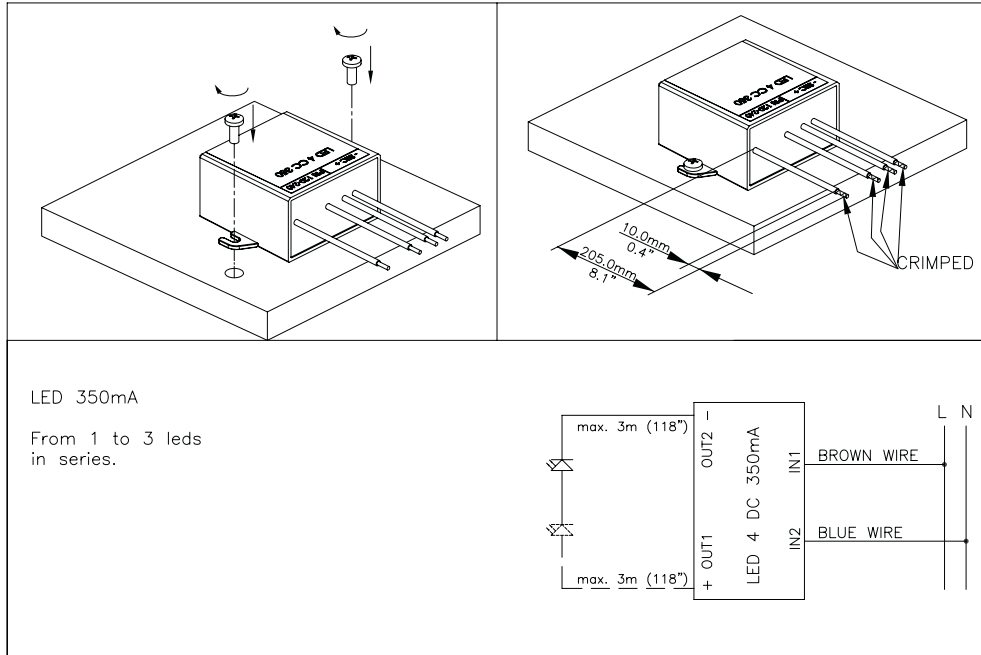

Safety Instructions:

1. Always disconnect power before installation and/or removal of the unit.
2. Install in accordance with national and local electrical codes.
3. Wires: Input and output wires 0.75mm² or 18AWG.