

LET-60 Class 2 PM

SPECIFICATIONS

UL File Number

UL and C-UL Recognized
UL FILE # E 193999

Available Version

901060012PM-With Potentiometer


Mechanical and Thermal

Dimensions(mm)	20 x 33 x 53
Weight	3 ounces
Lead wire length	6"
ΔT	40°C
Max. case temp.	90°C
Max. ambient temp.	50°C
Output wire – Blue	16AWG 600V 125°C
Input wire – White/Black	18AWG 150°C
Aluminum casing	


Electrical

Maximum load	60W
Input	120V 60Hz
Output at max. load	11.75V 40kHz
Input current at max. load	0.5A
Output current at max. load	5A
Power factor min.	0.95
Dimmable	

Output Voltage vs. Load at 120V

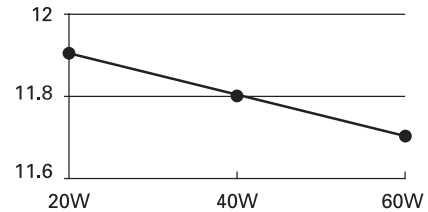


Output vs. Input at Max. Load

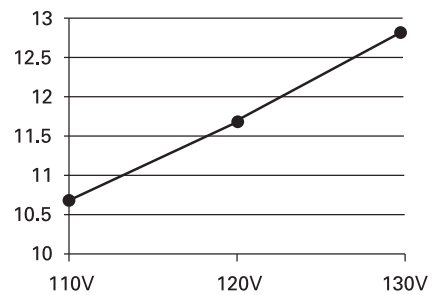


Short Circuit and Thermal Protection

Electronic internal resettable protection. Patented auto heat regulation that also automatically acts as overload protection. Auto-Reset thermal cut-off @ 125C.

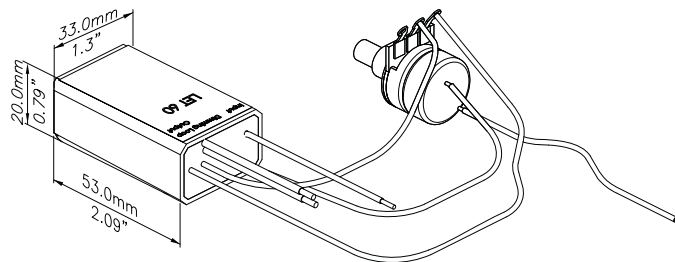

LET-60 Class 2 PM

Mounting Instructions

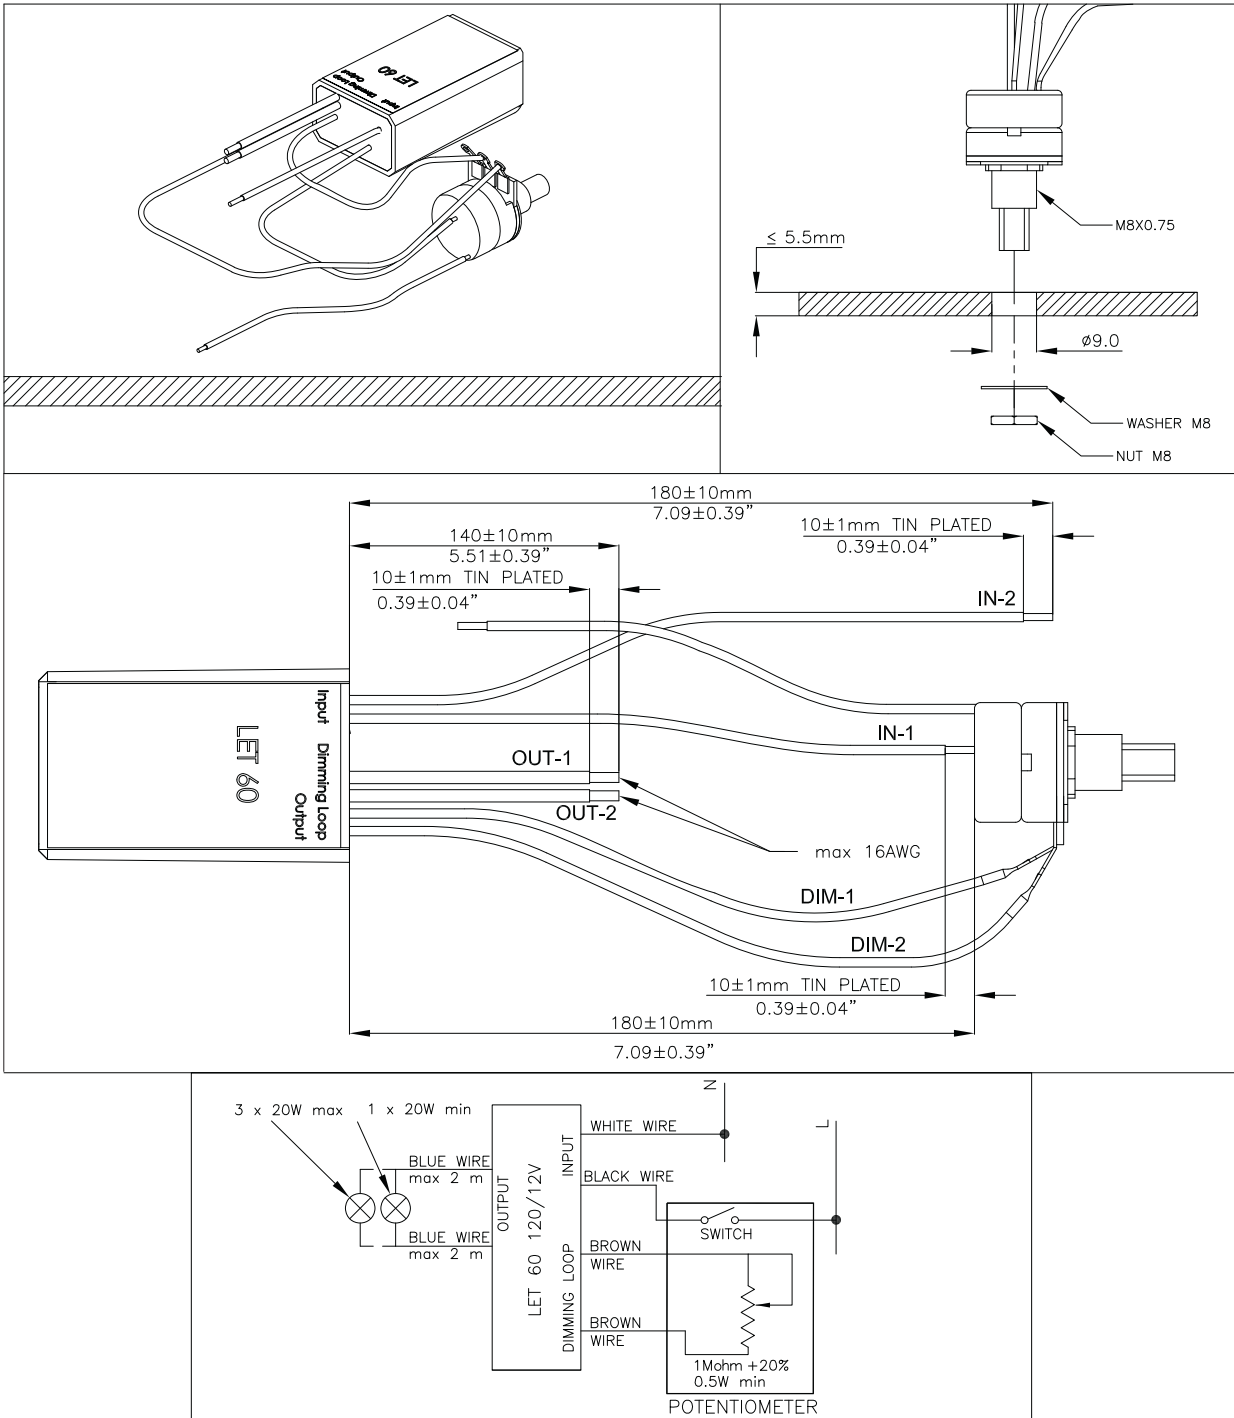

Safety Instructions:

1. Please note national installation regulations.
2. The measurement of output voltage can only be done with suitable measuring instruments.
3. Wires diameter: Input: 18 AWG
Output: 16 AWG.