




E2CR72RS/120/PT

Ballast Type: Electronic Fluorescent
 Starting Method: Rapid Start
 Input Voltage: 120V
 Input Frequency: 50/60Hz

Electronic Fluorescent Ballast Specifications

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
FC12T9 + FC16T9	2	120	32 + 40	0/-18	0.85	55	0.70	<150	0.53	1.27	2-3
FC8T9 + FC12T9	2	120	22 + 32	0/-18	0.62	40	0.76	<150	0.54	1.90	2-3

WIRING DIAGRAM

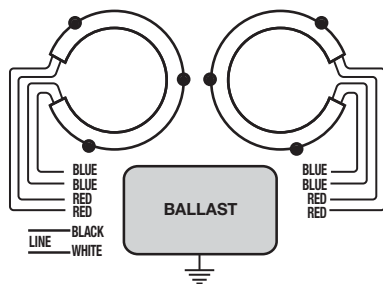

FOR POSITIVE STARTING,
 SPACE 3 METAL CLIPS 120°
 APART AS ILLUSTRATED.

2-3


STANDARD LEAD LENGTHS

	in.	cm.
Black	12	30.48
White	12	30.48
* Blue	9	22.86
* Red	9	22.86

* Pigtailed

OCV: <300V

CASE DIAGRAM

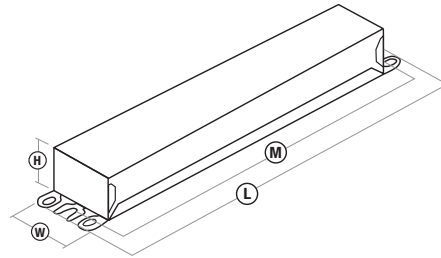

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
6.46"	1.89"	1.00"	6.00"

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50148

