



# ProLume™

## ProFormance™


### Electronic Fluorescent Ballast Specifications

# EP2110RS/120

Ballast Type: Electronic Fluorescent  
 Starting Method: Rapid Start  
 Lamp Connection: Parallel  
 Input Voltage: 120V  
 Input Frequency: 50/60Hz

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F96T12/HO	2	120	110	-20/-29	1.65	196	0.90	<10	0.99	0.46	2-1
F96T12/HO	1	120	110	-20/-29	0.88	104	0.92	<15	0.99	0.88	1-7
F96T12/HO/ES	2	120	95	60/16	1.38	164	0.90	<10	0.99	0.55	2-1
F72T12/HO	2	120	85	-20/-29	1.30	154	0.90	<10	0.99	0.58	2-1
F60T12/HO	2	120	75	-20/-29	1.10	132	0.90	<10	0.99	0.68	2-1
F48T12/HO	2	120	60	-20/-29	0.88	104	0.90	<15	0.99	0.87	2-1

#### WIRING DIAGRAMS

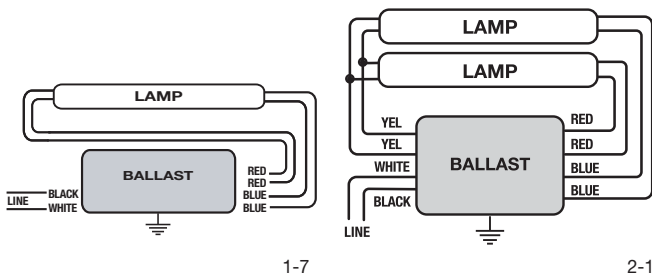


#### STANDARD LEAD LENGTH

	in.	cm.
Black	24	60.96
White	24	60.96
Blue	46	114.84
Red	46	114.84
Yellow	70	177.80

OCV: 750V

#### CASE DIAGRAM

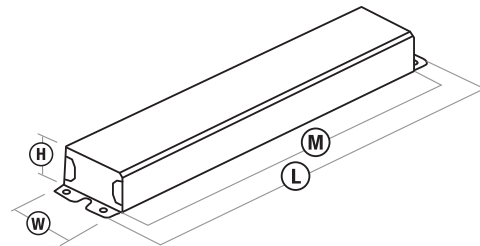

#### CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
11.80"	2.15"	1.61"	11.00"

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50162