


Extreme Temperature Metal Halide 35/39W

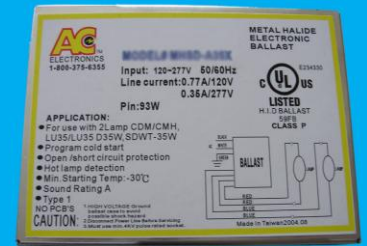

Description: Universal Voltage, Extreme Temperature, HID Metal Halide.
For use with 2 lamps 39W Metal Halide M130 Ceramic and SDW-T 35W.

Model #	Input Voltage	No. of Lamps	Lamp Watts	Input Watts (AVG)	Input Current (MAX)	Power Factor	Ballast Factor	THD	Bench Heat Test at 25°C Ambient Temp.	Crest Factor
AC-2/39MHUVXS	120V	2	39W	91	0.76	0.99	1.02	<10	55°C	1.3
	277V	2	39W	90	0.33	0.99	1.01	<10	47°C	1.3

Performance:


- Rating: Type 1 Outdoor
- High Power Factor
- Remote Wiring: 25 ft.

Application:

- Minimum Starting Temperature to -30°C
- Allowed Maximum Case Temperature 90°C
- Sound Rated A
- Add T to Item # for Thermal Protector
- 50/60 Hz
- Add BM for Bottom Mount

Safety:

- UL Listed
- HL (Hazardous Locations) Certified
- CUL Certified
- Surge Protected, Meets ANSI C62.41
- Starting Method: Pulse Start
- EMI/RFI: Complies with FCC CLASS A

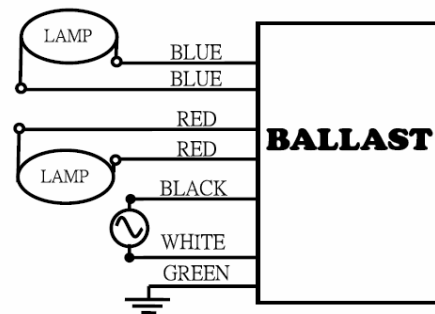

Physical Parameters:

Length:	5.43"
Width:	3.58"
Height:	1.26"
Weight:	1.47 lbs
Mounting - Length:	5.04"
Lead Length:	11.8"
Wire Leads:	Red, Black, White & Green
Qty/Carton:	30 pcs

Candela
always on

800-922-9226

Warranty:

A.C.E., warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal conditions of use.