

ProLume™

EP2110RS/MV


Ballast Type: Electronic Fluorescent
 Starting Method: Rapid Start
 Lamp Connection: Parallel
 Input Voltage: 120-277V
 Input Frequency: 50/60Hz

ProFormance™

Electronic Fluorescent Ballast Specifications

Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F96T12/HO	2	120	110	-20/-29	1.65	196	0.90	<10	0.99	0.46	2-1
		277			0.71				0.98		
F96T12/HO	1	120	110	-20/-29	0.88	104	0.92	<15	0.99	0.88	1-7
		277			0.38				0.95		
F96T12/HO/ES	2	120	95	60/16	1.38	164	0.90	<10	0.99	0.55	2-1
		277			0.60				0.97		
F72T12/HO	2	120	85	-20/-29	1.30	154	0.90	<10	0.99	0.58	2-1
		277			0.56				0.97		
F60T12/HO	2	120	75	-20/-29	1.10	132	0.90	<10	0.99	0.68	2-1
		277			0.47				0.96		
F48T12/HO	2	120	60	-20/-29	0.88	104	0.90	<15	0.99	0.87	2-1
		277			0.38				0.95		

WIRING DIAGRAM

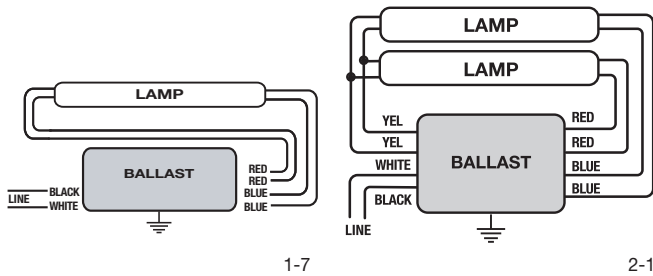


STANDARD LEAD LENGTH

	in.	cm.
Black	24	60.96
White	24	60.96
Blue	46	114.84
Red	46	114.84
Yellow	70	177.80

OCV: 750V

CASE DIAGRAM

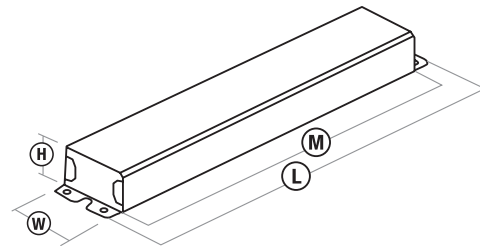

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
11.80"	2.15"	1.61"	11.00"

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50164