

**PROGRAMMABLE,  
DIGITAL, WIDE-RANGE  
ADJUSTABLE CURRENT & DIMMING  
TYPE TL RATED**

## Constant Current LED Driver

**Model Number**  
\* **AC-40CDI.4APMZ**  
**AC-40CDI.4APBKV**  
**AC-40CDI.4APSC**

Input Voltage: 120-277V  
Input Frequency: 50/60Hz  
Side and Bottom Mount/Leads Options  
< 1 Sec. Start time


**Dim-to-1% (Default)**

### ELECTRICAL SPECIFICATIONS:

Output Power	Input Power	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Min. Starting Temp**	Efficiency Up To	Dimming Protocol	Dimming Range	IP Rating
10 to 40W	47W	0.4A @ 120V, 0.18A @ 277V	>0.90	<20%	15 to 55V	400 to 1400mA	90°C	-40°C	85%	0 to 10V	1 to 100%	64

\*\* This driver can operate down to -40°C in a non-dimming condition. Below 0°C some flicker may be observed.


### WIRING: INPUT

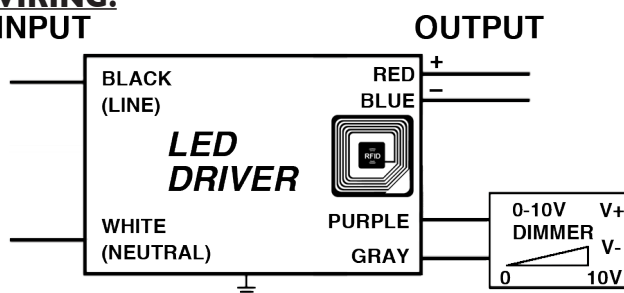

### Lead Lengths

Black	5.9"	Blue	5.9"	Purple	7.1"
White	5.9"	Red	5.9"	Gray	7.1"

### PHYSICAL:



Bottom Mount  
Model No:  
AC-40CDI.4APBKV



Hot Spot

ONLY - AC-40CDI.4APMZ (1Kv)  
Sensor Area is on the bottom with a NFC Sensor Label

Dimensions	Length	Width	Height	Mounting
AC-40CDI.4APMZ	6.22"	1.73"	1.22"	5.86"
AC-40CDI.4APBKV	4.56"	2.48"	1.18"	
AC-40CDI.4APSC	12.8"	1.34"	1.06"	12.5"

Tref Max Value (°C)	Tc/Tref Value (°C)	Ta/Value (°C)
90	58.2	40

### SAFETY:

- UL and cUL Recognized
- UL Outdoor Type I
- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C\*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (3 KV)
- Surge Protection (1Kv)\*
- Dim-To-Off Programming Option
  - o Active: Code = 78 05 01 01
  - o Inactive: Code = 78 05 00 01

### INSTALLATION:

- Max Remote installation distance is 18 ft
- LED driver cases should be grounded
- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/I05C tinned stranded copper lead-wires are required for installation



\*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See [aceleds.com](http://aceleds.com) for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.




### **Phone Instructions**

First you must have a Android device (phone/tablet) with NFC-V app downloaded.  
 Open App; then place the device on top of the driver matching up sensors until it syncs up  
 Basic format  
 Write  
 Insert the appropriate code from chart above  
 Write  
 Successfully written will appear  
 Use with NFC-V Reader App Available Free at Google App Store

To Check: Read  
 Read  
 Shows you the Block - 00 00 00 00  
 This is where the code you input appears



### **IOUT/VOUT CURVE**

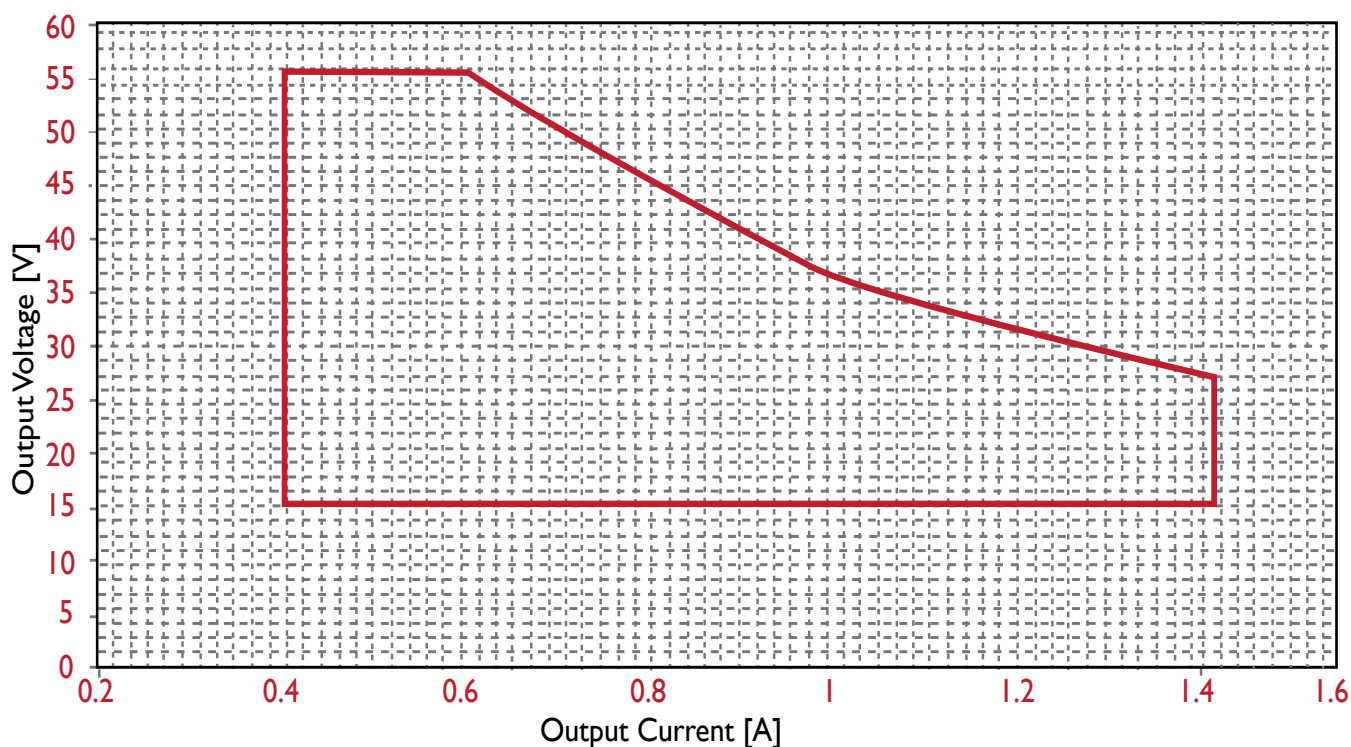


**CONTROL THE IOUT WITH THE PROGRAMMING WAND. DOWNLOAD SOFTWARE FROM <http://www.aceleds.com/products-programmable.php>**

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Performance Characteristics


Life Time v.s. Case Temperature Curve

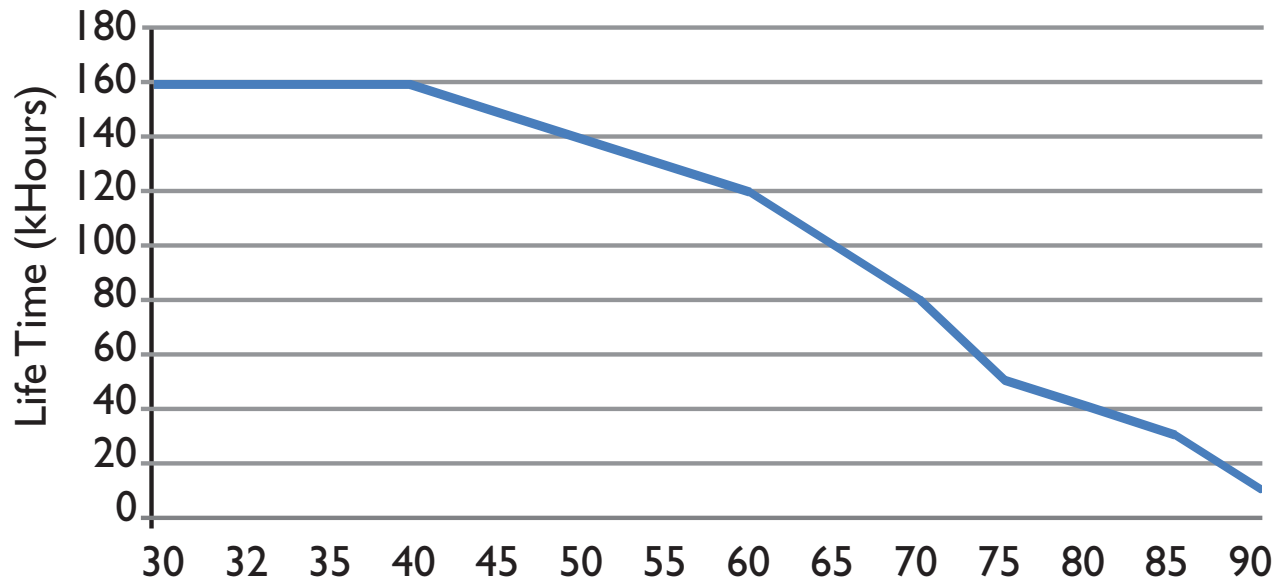

Case Temperature Curve (°C)

Derating Curve

120Vac & 277Vac


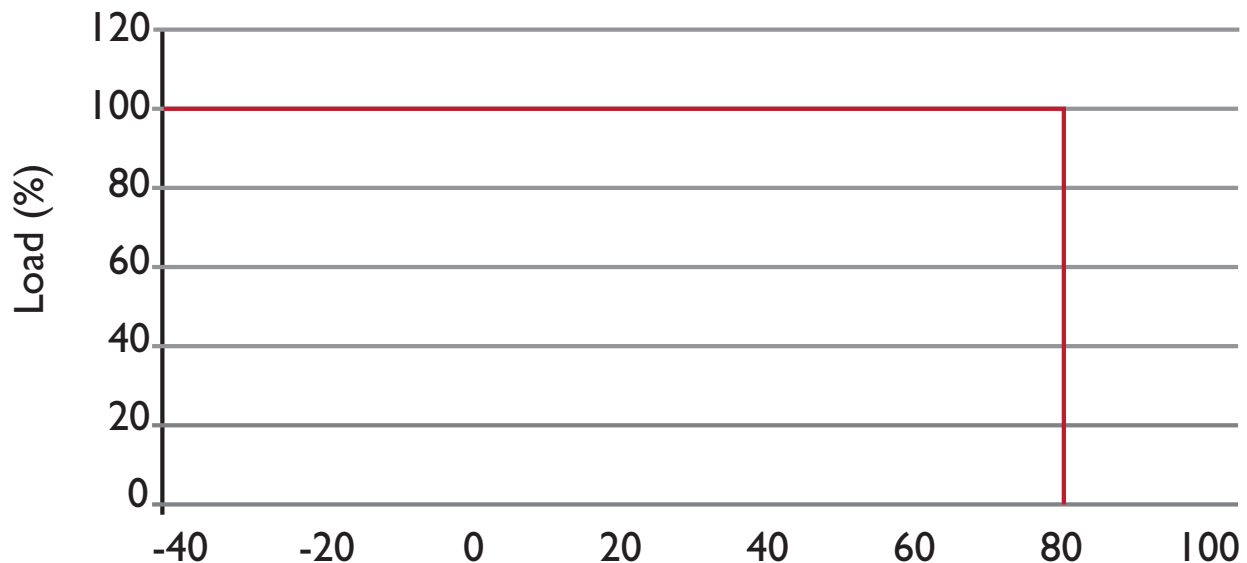


Outside Driver Ambient Temperature (°C)

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Performance Characteristics

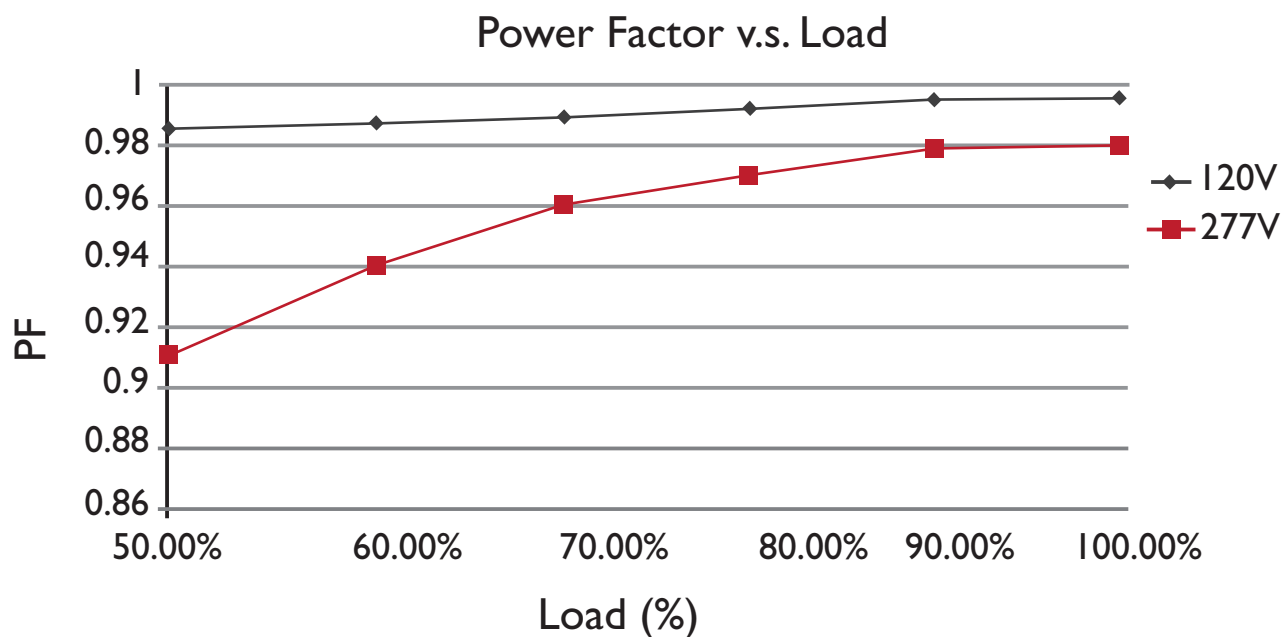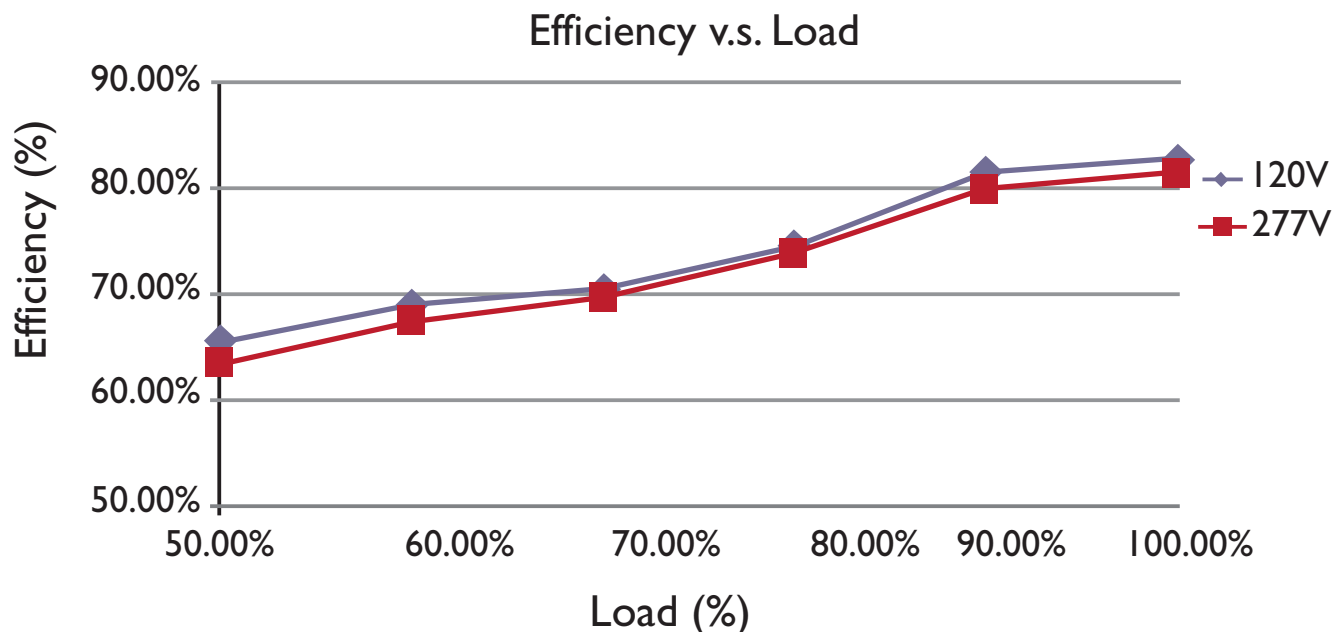


3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)


Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

**Performance Characteristics**

**Output Current v.s. Dimming**

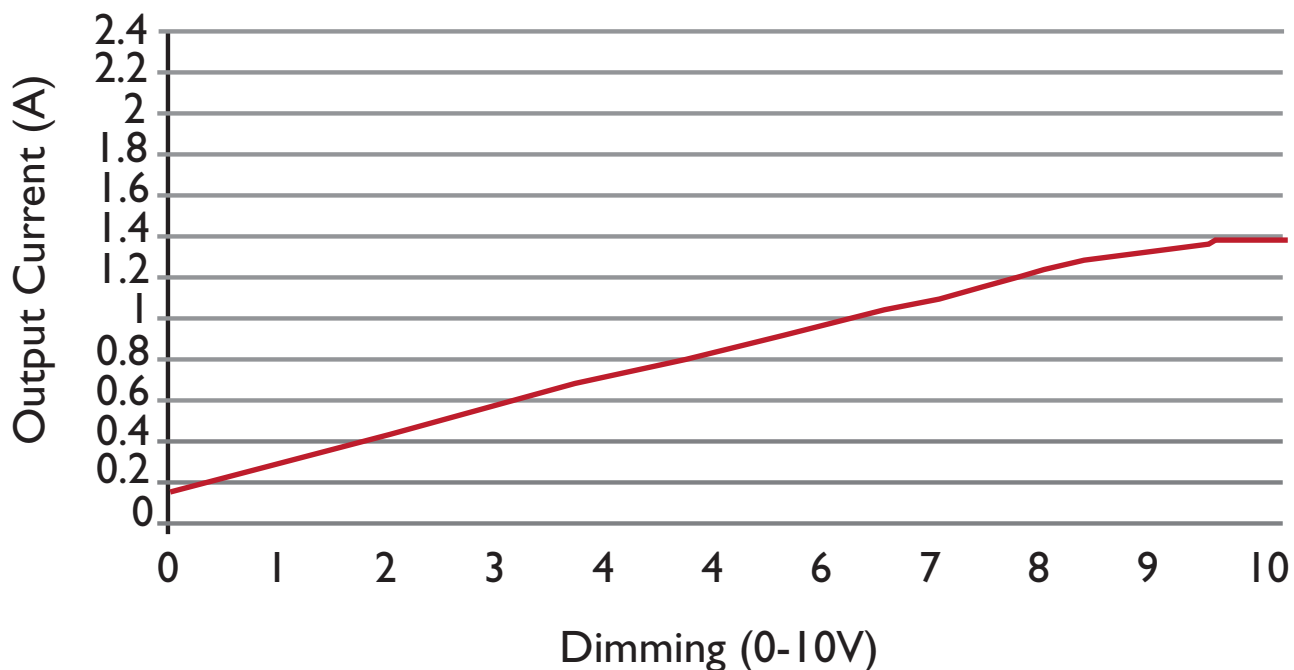

**Output Current v.s. Resistance**

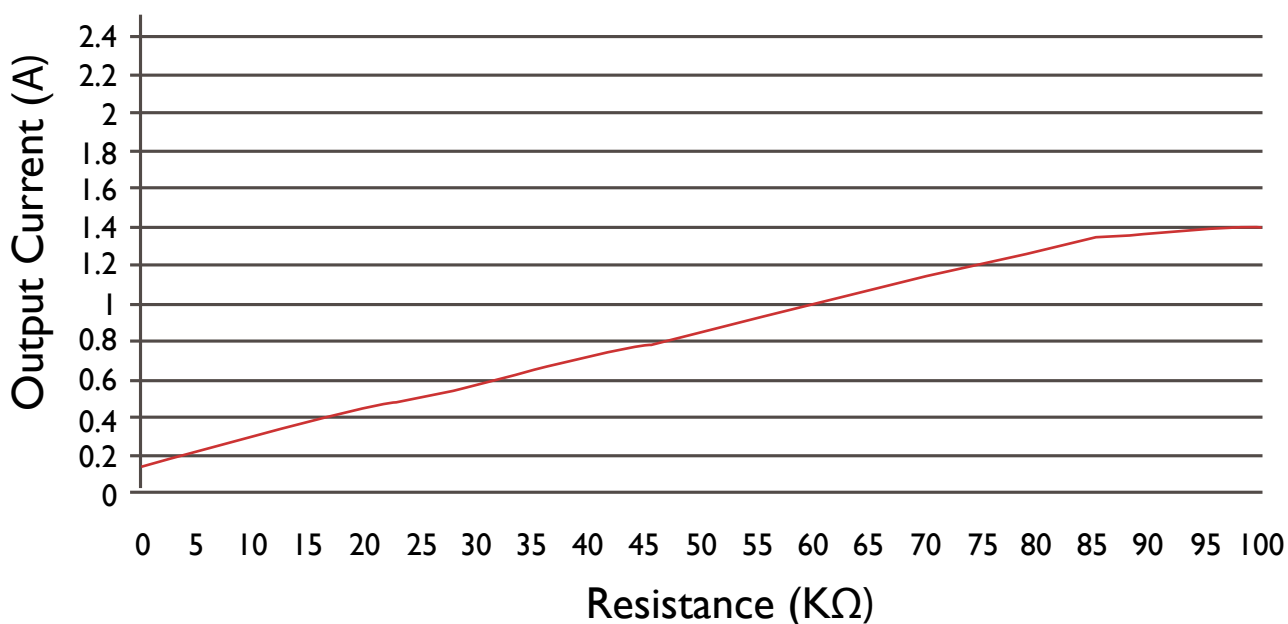

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.