

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com


Customer Name:
Project Name:
Fixture Type:



GE
Lighting

97617 - F26TBX/841/A/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office;
Restaurant; Warehouse



GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX24q-3
Wattage	26
Voltage	120/105
Rated Life	12000 hrs
Starting Temperature	0 K (32 °F)
Cathode Resistance	2.7 Ohm
LEED-EB MR Credit	218 picograms Hg per mean lumen hour
Rated Life (rapid start) @ Time	12000.0 @ 3.0/20000.0 @ 12.0 h
Additional Info	Dimmable with appropriate dimming ballast./End of Life Protection (EOL)/TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;W

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1800
Mean Lumens	1530
Nominal Initial Lumens per Watt	69
Color Temperature	4100 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS


Current (max)	5.25 A
Open Circuit Voltage (after preheating)	265 V
Open Circuit Voltage Across Starter	198 V
Lamp Current	0.42 A
Preheat Voltage	4.25 V
Supply Current Frequency	20000 Hz

DIMENSIONS

Maximum Overall Length (MOL)	5.2 cm
Nominal Length	5.2 cm
Bulb Diameter (DIA)	0.406 cm
Bulb Diameter (DIA) (MAX)	0.406 cm

PRODUCT INFORMATION

Product Code	97617
Description	F26TBX/841/A/ECO
ANSI Code	60501-IEC-3426-1
Standard Package	Case
Standard Package GTIN	10043168976173
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168976176

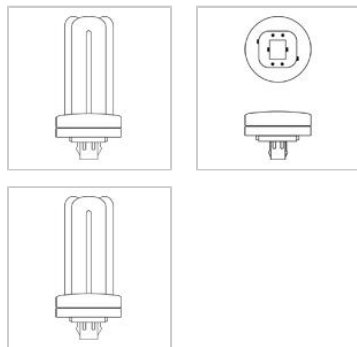


CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

GRAPHS & CHARTS

Spectral Power Distribution

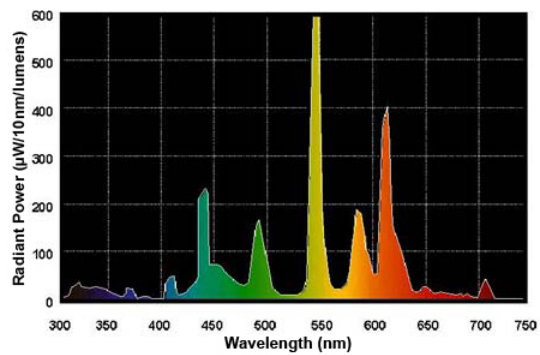

NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Amalgam product experience stable brightness over a wider temperature range and in various operating positions.
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life