

## Model Number AC-A12V24H0.5


Type: Constant Voltage LED Driver

Max Output Power: 12W

### ELECTRICAL SPECIFICATIONS:

Input Voltages	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Minimum Starting Temp	Efficiency Up To	IP Rating
120V to 277V 50/60Hz	0.14A @ 120V 0.06A @ 277V	0.95	15%	24V ±5%	0.05 to 0.5A	90° C	-40° C	74%	IP66

### WIRING:

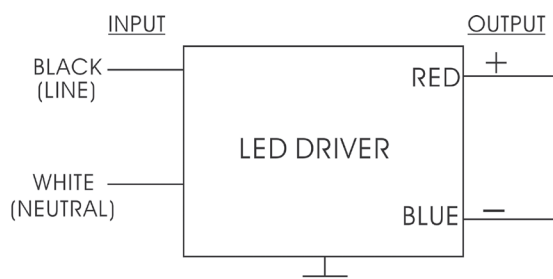

#### Wiring Lead Lengths

Wire Color	Length
White	5.9"
Black	5.9"
Red	5.9"
Blue	5.9"

### PHYSICAL:



#### Dimensions

Dimension	Value
Length	6.22"
Width	1.73"
Height	1.22"
Mounting Length	5.87"
Mounting Hole Distance	1.02"
Mounting Hole Diameter	.20"
Weight	.75 lbs.
Case Qty.	50 pcs.

### SAFETY:

- UL and cUL certified
- UL1310 Class 2
- UL Outdoor Type I
- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C\*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

### INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required to use in installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



\*A.C.E. warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See [www.aceleds.com](http://www.aceleds.com) for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

