



# Minuteman 5™ LED Retrofit Kit + Housing For Canopy Lights

Contains LED Retrofit Kit and LED Lighting Housing



Made In USA

## AC Electronics LED Retrofit Kit + Housing vs. Standard HID Lights

Wall Pack Light Source	Input Wattage	Lifespan Hrs/Yrs	Energy Use (24hrs/day) Annual	Annual Cost (maintenance + electricity) @ \$0.11/kWh	Electrical Cost Savings
HID	165	24,000/ 2.7	1446 kWh	\$159.00	
LED	37	50,000/ 5.7	324 kWh	\$35.65	78%

LED Retrofit Kit:



+ LED Lighting Housing



= Minuteman 5™ LED Retrofit Kit + Housing




## Model Number AC012/35/1.0

— Includes Housing —

### Includes:

- Single Output Channel, Class 2 LED Driver, Model Number: AC-35C1.0AUA
- 1 PCB LED Array with 10 Samsung LH351B LEDs mounted to industrial grade aluminum LED/Driver bracket (10 LEDs per array)

### Wiring Diagram

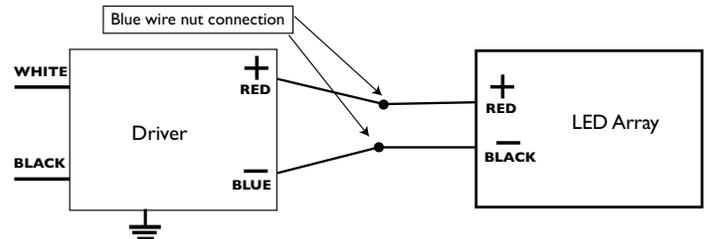

### Warranty

LED Retrofit Kit + Housing warranty is only valid when it is used in a fixture it was designed for unless otherwise approved in writing by AC Electronics. Any other use in any fixture assembly or use with non-AC specified or supplied components will void this warranty.

\*AC warrants to the purchaser that this LED Retrofit Kit + Housing will be free from defects in material or workmanship for a period of 5 years from date of manufacture, when operated at a maximum ambient temperature of 110°F or 45°C, when properly installed and under normal conditions of use. See [www.aceleds.com](http://www.aceleds.com) for complete warranty policy.

### Specifications

Item	Specification
Input Voltage	120-277V, 50/60 Hz
Fixture CRI	73
LED Color Temperature	5000
Fixture Lumens	3000
Fixture Efficacy	80 lumen/Watt
Lumen Maintenance	≥79% @ 5 years
Zonal Lumen Requirements	Not Measured
Warranty	5 years*
LED Quantity (Brand: Samsung LH351B)	10
LED TMP Temperature @ 25°C	81.5°C
Input Power	37W
Driver Efficiency	84%
Power Factor @ 277V	>0.9
THD @ 277V	<20%
Driver TMP @ 25°C ambient	57°C
Noise	<24dB
EMI	FCC part 15
Max Operating Temperature	45°C Ambient
Min Operation Temperature	-40°C Ambient
LED Retrofit Kit Dimensions / Weight	11.7"W X 11.0"H X 2.9"D / 3 lbs.
Assembled Fixture Dimensions / Weight	12.4"W X 12.4"H X 8.9"D / 8 lbs.

Note: LM79 and ies files are available upon request.



### Tork® 2107 Photocell

Approved For Use With AC LED Retrofit Kits

- 120/277V 1800 VA Ballast Load
- 1 To 5 FC Turn On Light Level
- 3 To 15 FC Turn Off Light Level
- SPST Switch
- 16 AWG 6 Inch Wire Lead Terminal
- Temperature Rating -40 to 140°F
- 1/2" Conduit Mounting
- Not included, available from secondary sources

