Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com

Customer Name: Project Name: Fixture Type:



GE Lighting

72130 - F32T8/25WSPX41EC

GE Ecolux® Starcoat® T8

- Saves energy compared to standard wattage lamps
- Passes TCLP, which can lower disposal costs.











GENERAL CHARACTERISTICS

Lamp Type Linear Fluorescent - Straight

Linear

Bulb T8
Base Medium Bi-Pin (G13)

Wattage 25
Rated Life 40000 hrs
Rated Life (instant start) @ 36000 h @ 3 h
Time 40000 h @ 12 h

Rated Life (rapid start) @ Time 40000.0 @ 3.0/46000.0 @

12.0 h

Bulb Material Soda lime Starting Temperature 15 $\,^{\circ}$ C (59 $\,^{\circ}$ F)

LEED-EB MR Credit 42 picograms Hg per mean

lumen hour

Additional Info TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens2500Mean Lumens2350Nominal Initial Lumens per Watt100Color Temperature4100 KColor Rendering Index (CRI)85S/P Ratio (Scotopic/Photopic1.8

Ratio)

ELECTRICAL CHARACTERISTICS

Open Circuit Voltage (instant 550 V @ 15 °C

start) Min @ Temperature

Cathode Resistance Ratio - Rh/ 4.25

Rc (MIN)

Cathode Resistance Ratio - Rh/ 6.5

Rc (MAX)

Current Crest Factor 1.7

DIMENSIONS

Maximum Overall Length 47.7800 in(1213.6 mm) (MOL)

(A)

Face to End of Opposing Pin 47.400 in(1204.0 mm)

(B) (MIN)

Face to End of Opposing Pin 47.500 in(1206.5 mm)

(B) (MAX)

End of Base Pin to End of 47.670 in(1210.8 mm)

Opposite Pin End (C)

PRODUCT INFORMATION

Product Code 72130

Description F32T8/25WSPX41EC

Standard Package Case

Standard Package GTIN 10043168721308

Standard Package Quantity 36
Sales Unit Unit
No Of Items Per Sales Unit 1


No Of Items Per Standard 36

Package UPC

PC 043168721301





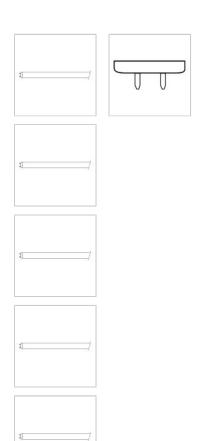

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.
- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
- Turn power off before inspection, installation or removal.
- Risk of Electric Shock
- Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Spectral Power Distribution

