


P5G-2UE Service Masters


Universal Replacement Transformers





- Ready to Mount. Step Plate eliminates double-nutting.
- Diagnostic Circuit "LED" indicates the reason for service, allowing for quick, easy troubleshooting.
- Primary Wiring Requirements of a Non-SCGFP - with the added safety of Secondary Ground Fault Protection.
- ◆ Service Button For easy troubleshooting of ground faults and primary wiring problems. Overrides the SCGFP for up to 30 minutes.



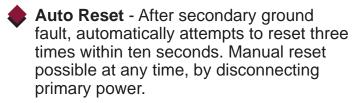



- Secondary Circuit Ground Fault Protection - (SCGFP) Disables unit upon detection of arcs to ground in compliance with UL2161 and NEC requirements.
- Easy Wiring Methods Virtual Ground and Series Wiring Methods
- User Friendly Adapts to most grounding situations.
- *Can be used in flashing/dimming applications.





^{*} UL does not have listing requirements for transformers that are remotely dimmed or flashed.






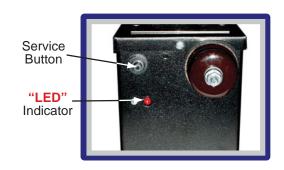

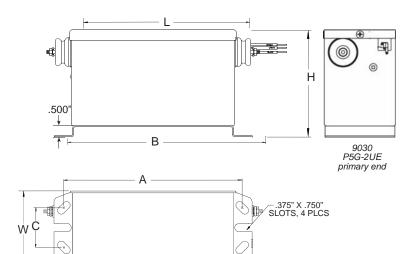





9060,15030 15060 P5G-2UE P5G-2UE primary end primary end

NORMAL POWER FACTOR													
Catalog Number	VAC	Hz	Secondary		Primary	Input	Wt.	Case Dimensions					
			Volts	mA	V.A.	Amps	Lbs.	L	W	Н	Α	В	С
15030 P5G-2UE	120	60	15000	30	510	4.25	21	9.20	4.65	5.71	10.13	11.25	3.00
9030 P5G-2UE	120	60	9000	30	330	2.75	13	8.37	3.70	5.39	9.00	10.00	2.00
15030 P5G-2UE	277	60	15000	30	530	1.90	21	9.20	4.65	5.71	10.13	11.25	3.00
9030 P5G-2UE	277	60	9000	30	320	1.15	13	8.37	3.70	5.39	9.00	10.00	2.00
15060 P5G-2UE	120	60	15000	60	940	7.80	39	10.87	5.37	6.20	11.88	13.00	3.00
9060 P5G-2UE	120	60	9000	60	600	5.00	23	9.20	4.65	5.71	10.13	11.25	3.00
15060 P5G-2UE	277	60	15000	60	980	3.60	39	10.87	5.37	6.20	11.88	13.00	3.00
9060 P5G-2UE	277	60	9000	60	610	2.20	23	9.20	4.65	5.71	10.13	11.25	3.00

xs09003 05/02/13



Contact Customer Service: 800-793-4793

email: sales@sfeg.com

www.franceformer.com