

New Construction and Remodel



Specifications:

Description:

This low volt output transformer provides the solution of 12V load devices or lighting desk lamp or floor lamp application through input 120V plug to the existing wall outlet to get 12V output power for safe operation; it can be widely used for transforming 120V input to 12V output disposal both in residential and commercial usages.

Features:

- Soft start overload
- Short circuit protected
- Auto reset
- For use with 12V Halogen or incandescent lights only


Performance:

| | |
|---------------------|---------------------------------|
| Input | 120VAC, 1.2A |
| Output | 12VAC, 150W Max. |
| Input Frequency | 60Hz |
| Power Factor | ≥0.5 |
| Operating Frequency | > 20KHz |
| Warranty | 1 year |
| Certification | cETLus Classified. Dry Location |

Catalog Number:

| Item | Output Watt | Output Voltage | Dimension |
|-----------|-------------|----------------|----------------------|
| HD150-120 | Max. 150W | 12VAC | 4 3/8"x1 7/8"x1 1/4" |

Image:

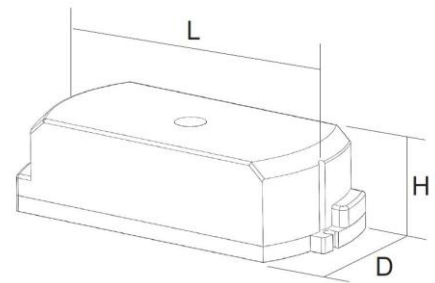

L=4 3/8" W=1 7/8" H=1 1/4"



Amax Lighting, Inc.

10268 Santa Fe Springs Road, Santa Fe Springs, CA 90670

Tel: 562-945-5221 Fax: 562-464-1664

www.amaxlighting.com