


4

3

DWG NO. 1000019 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

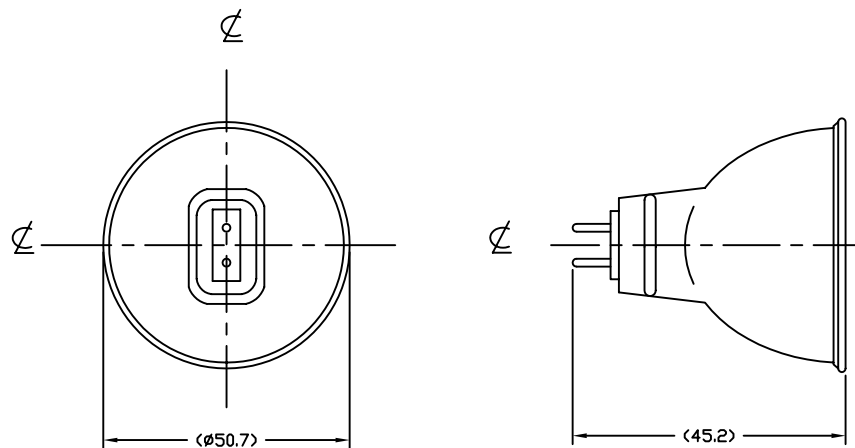

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	20 W
COLOR TEMP	2900 K
AVERAGE LIFE	3500 HRS
BASE TYPE	GU5.3
MAX CP	510 cd
FILAMENT TYPE	C-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING MATERIAL COMPOSITE FINISH		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630 TITLE BAB/S/FG JR12V-20W/FL/S/FG			
		APPROVALS				DATE	
		DRAWN	R.AMPARO	11/08/99			
		CHKD	D.GILCZYNSKI	11/08/99			
		ENGR					
		MFG					
		QUAL			SIZE	CODE IDENT NO.	DWG NO.
		DSGN ACTVY			B	BAB	1000019
		GOVT ACTVY			SCALE	WEIGHT	SHEET
					NONE		1 OF 1

4

3

2

1

CAD