
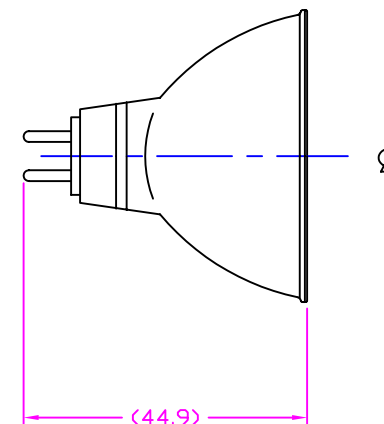
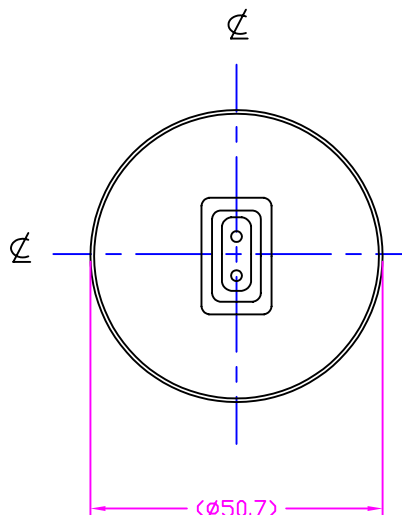


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

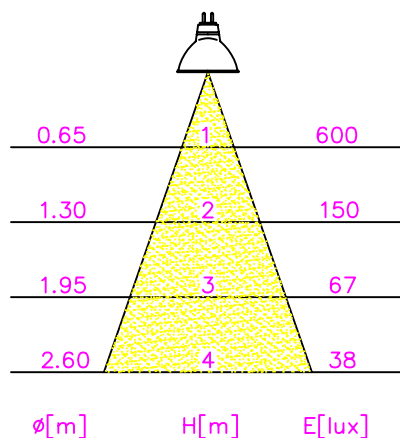

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
		APPROVALS	DATE	TITLE BAB JR12V-20W/FL	
		DRAWN	R.AMPARO 05/05/00		
		CHKD	D.GILCZYNSKI 05/05/00		
		ENGR			
		MFG		SIZECODE IDENT NO.DWG NO. B BAB 1000000	
QUAL					
DSGN ACTVY					
MATERIAL	COMPOSITE	GOVT ACTVY	SCALE	WEIGHT	SHEET
FINISH			NONE		1 OF 1

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	20 W
CANDLE POWER	600 cd
BEAM SPREAD	36°
COLOR TEMP	2950 K
AVERAGE LIFE	4000 HRS
BASE	GU5.3
FILAMENT	C-8
BURNING POSITION	ANY