


LO-13-22-TP

Brand Name	COMPACT-OPEN
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	120
Input Frequency	60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Starting Current (Amps)	Open Circuit (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor
* CFQ13W/GX23	1	13	50/10	0.29	0.43	0.00	17	0.99	15	0.48

Wiring Diagram

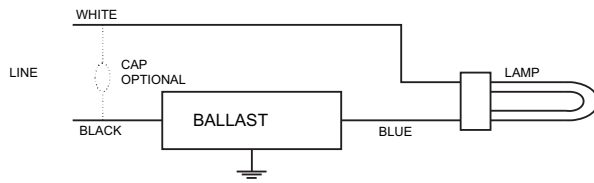

Diag. 140

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	15	38.1	Yellow/Blue		0
White		0	Blue/White		0
Blue	15	38.1	Brown		0
Red		0	Orange		0
Yellow		0	Orange/Black		0
Gray		0	Black/White		0
Violet		0	Red/White		0

Enclosure

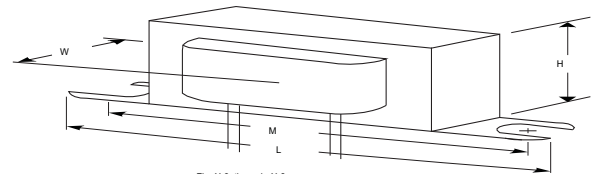


Fig. X-3 through X-8

Enclosure Dimensions

OverAll (L)	Width (std)/(TP)	Height (H)	Mounting (M)
3.0625 "	1.25 "/1.4375 "	1.8125 "	2.75 "
3 1/16	1 1/4 / 1 7/16	1 13/16	2 3/4
7.8 cm	3.2 cm / 3.7 cm	4.6 cm	7 cm

Revised 02/14/2006



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.