

4


3

DWG NO. 1000060 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

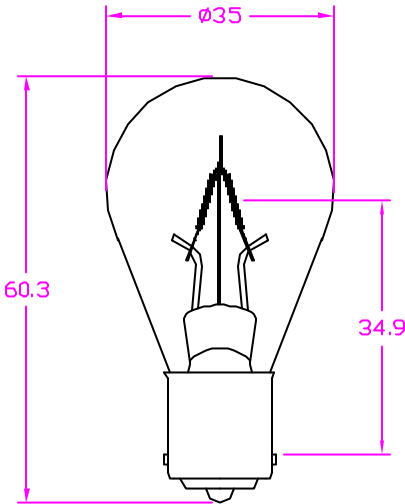

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
RATED VOLTAGE	120 V
WATTAGE	30 W
COLOR TEMP	2775 K
TOTAL LUMENS	400 Lm
AVERAGE LIFE	50 HRS
BASE TYPE	BA15d
FILAMENT TYPE	CC-2V
BURNING POSITION	BD/Hor.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± — .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
	APPROVALS		DATE		
	DRAWN	R.AMPARO	09/19/00		TITLE BLC, INC120V-30W INCANDESCENT LAMP
	CHKD	D.GILCZYNSKI	09/19/00		
	ENGR				
	MFG				
QUAL					
MATERIAL		SIZE	CODE IDENT NO.	DWG NO.	
COMPOSITE		B	BLC	1000060	
FINISH	DSGN ACTVY		SCALE NONE		
	GOVT ACTVY				
			WEIGHT		SHEET 1 OF 1

4

3

2

1

CAD