

575 Watt Pulse Start Lamp

37292 DATA SHEET



MP 575W/U/BT37/PS/740

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M178/0
Bulb Shape	BT37
Base Type	Mogul (EX39)
Bulb Finish	Clear
Rated Life (V)	26000 hours
Rated Life (H)	19500 hours
Operating Position	Universal

ELECTRICAL

Lamp Watts	575
Lamp Oper. Voltage (Nom.)	135

SUSTAINABILITY

Mercury Amount (mg)	50
Picograms of Hg per Mean Lumen Hour (V)	40

PHOTOMETRIC



Initial Lumens / LPW (V)	60000 / 104
Initial Lumens / LPW (H)	54000 / 94
Lamp Lumen Depreciation (LLD)	.80 (80%) @ 10400 hours
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) R_a	68

PHYSICAL




Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	52.5mm
Max. Base Temperature (°C)	230
Max. Bulb Temperature (°C)	450
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated

NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Nominal color temperature rating is based on Vertical ($\pm 15^\circ$) operation of the lamp. Off-vertical positions will result in higher color temperature.
- Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.
- Product may contribute towards satisfying MR-Credit 4 under LEED.



Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (EX39)

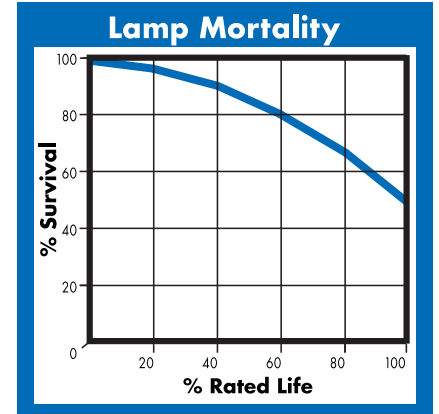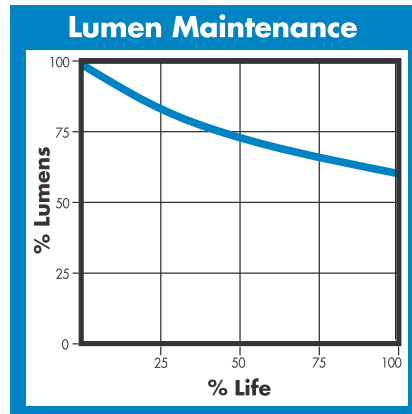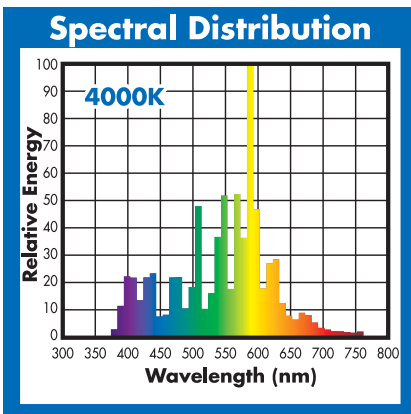

(800) 451-2606

Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.