

# S Series Intelligent LED Driver



**0.1% Deep Dimming**  
**Tunable White**  
**Human Centric Lighting**

**Flicker Free**

**Meet:**

**CEC title 24 JA8 & JA10**

**IEEE PAR 1789-2015**

## ■ 50W S Series-Dual Channels LED Driver- MU050S150BQI201

MOONS' 50W S Series Dual Channels LED Drivers are designed for Human Centric Lighting and Tunable White application, mixed two channels achieve smoothest color temperature tuning and brightness dimming due to 0.1% deep dimming character, which let human feel like sunlight and moonlight. Fit with various application thanks to driver's various function, such as programmable parameters, different outline, optional dimming strategy, etc.

## ■ Main Characteristics

- Dual Channels, constant current driver
- Programmable operation window
- 0.1% Dimming & 65536 Dimming Steps
- Standby power<0.5W
- Integrated 12Vdc/100mA auxiliary power supply
- 2 channels isolated 0-10V control
- 4 in 1: Tunable White(1500-6500K), Dim to Warm(1500-3200K), solo dimming, dual dimming
- 50W Max each channel with total 50W load
- Flicker free for whole operation range

## ■ Benefits

- Application-oriented operating window for maximum compatibility
- Independent two channels for Tunable White application
- Ready for Zhaga book 18/low voltage power
- Common anode design for higher output current

## ■ Applications

- Office, Architecture, Education, Healthcare, Smart home


## ■ Compliance and Certification

- Comply with UL Class2
- UL, CE, EAC safety approval

## ■ Electrical Specifications

Input	Efficiency (230Vac)	87% (Typical)
	Efficiency (100Vac)	86.5% (Typical)
	Voltage Range (Vac)	90~305
	Rated Input Voltage (Vac)	100~277
	Frequency Range (Hz)	50/60
	Power Factor	>0.9 @ 100~277Vac 50/60Hz input, with 50%~100% load conditions
	THD	<20% @ 100~277Vac 50/60Hz input, with 50%~100% load conditions
	AC Current (Typical)	0.7A Max @ 100Vac, 0.3A Max @ 230Vac
	Inrush Current (Typical)	<10A @ 100~277Vac input, 25°C cold start and 100% load conditions
	Input Power (W)	66 (Max)
	Standby Power (W)	<0.5W @ 100V/60Hz, 230V/50Hz, 277V/60Hz
	Leakage Current (Max)	0.75mA Max @ 277Vac 60Hz input
Output	Output Voltage Range (V)	8~55
	Output Current Range (mA)	200~1500
	Rated Power (W)	50 (Max)
	Output Channel Number	2 or 1
	Ripple Current (PK-PK)/AV	20% Max @ output 300~1500mA conditions
	Current Tolerance	±5% @ setting current 200~1500mA
	Line Regulation	±1%
	Load Regulation	±3%
	Startup Time	<0.5S @ 100V/230V/277V
Auxiliary Output	Output Voltage	12Vdc (±5%) @ operation range
	Operation Range	0~100mA
Dimming Port	0-10V Dimming	Output current ≤1mA
	0-10V Dimming	Isolated 0~10V dimming 0.1%~100%, optional dimming curve: logarithmic/linear
Protection	Open Circuit Protection (V)	58.5
	Short Circuit	Automatic recovery
	Over Temperature	Automatic recovery
Environment	Operating Temperature	-25~60°C
	Operating Humidity	20~95%RH, non-condensing
	Storage Temperature	-40~85°C
	Storage Humidity	10~95%RH
	Vibration	10/500Hz, 5G 12min/cycle, period for 72min each along X, Y, X axis
	Ingress Protection Rating	IP20
Safety & EMC	Safety Standard	UL8750, UL1310 Class 2, CAN/CSA-C22.2NO.107.1-01, EN61347-1, EN61347-2-13
	EMC Emission	FCC Part 15 ClassB, EN55015, EN61000-3-2 ClassC, EN61000-3-3
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge L, N-FG: 2.5KV, L-N: 2.5KV)
Others	Lifetime	>50000 hours @ Tc=70°C and 100% load conditions
	MTBF	500,000 hours, measured at full load, 25°C ambient temperature SR-332 Issue 3
	Dimension (L x W x H mm)	408 x 30 x 21
	Weight	420g

■ **Connector Layout**

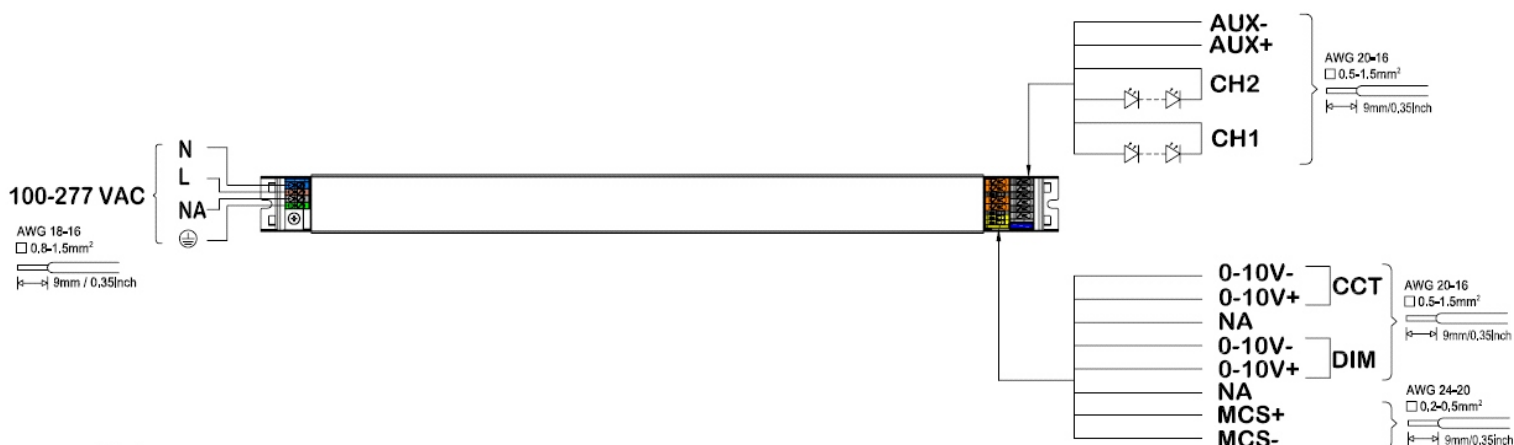

■ **AUX±**

- i. The AUX circuit is isolated from primary (input) circuit and dimming circuit, but not isolated from secondary (output) circuit.

■ **0-10V±**

- i. The dimming circuit is isolated from primary (input) circuit and secondary (output) circuit .
- ii. Tunable White uses two signals to control two outputs to achieve color temperature and intensity changing on CCT lamp.  
Dim to Warm dims like incandescent light bulb, only use one 0-10V signal to control two outputs to achieve that CCT value follow lamp's Intensity.  
0-10V Dual dims like unicast dimming, use two signals to control two outputs respectively.  
0-10V Solo dims like broadcast dimming, use one signal to control two outputs simultaneously.
- iii. Maximum communication cable length

Material	Area mm <sup>2</sup>	AWG	Maximum cable length (meter)		
			25°C	50°C	75°C
Copper	0.5	20	112	102	93
	0.75	18	168	153	140
	1	17	224	204	187
	1.5	/	300	300	281

- iv. Standby power <0.5W only if set dim level 0 and disable AUX.

■ **MCS±**

- i. MCS+/- interface voltage 5V
- ii. Could connect to external NTC  
NTC thermal management protects LED lamp, when the temperature of LED lamp over temperature protection point, the current will be reduced by 50% every 5 minutes. Default setting is 85°C.



NTC compatibility list:

NTC Manufacturer	NTC Model NO.
MURATA	NCP21WB473J03RA
VISHAY	NTCS0805e4473JXT
VISHAY	NTCLE100E3473

- iii. The MCS terminal is to be used for factory programming and update of firmware program.  
Not for connecting to a control device to perform control function (except NTC thermistor).
- iv. Update firmware through MCS interface.

■ **CH1±, CH2±**

- i. General connection
- ii. Get larger output current through parallel connection
- iii. Support common anode connection

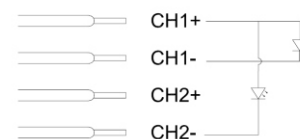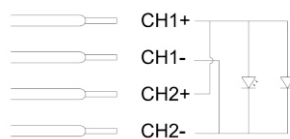

- ii. Maximum LED wiring length (copper)

Wire Value	AWG 20 (0.52 mm <sup>2</sup> )	AWG 19 (0.57 mm <sup>2</sup> )	AWG 18 (0.81 mm <sup>2</sup> )	AWG 17 (1.03 mm <sup>2</sup> )	AWG 16 (1.32 mm <sup>2</sup> )
Distance (m)	16	18	25	32	41

! Please observe voltage drop over cable lengths.

! Longer cable lengths increase EMI.


**Dimming Performance**

**Flicker Free**

- i. Meet: CEC title 24 JA8 & JA10, IEEE PAR 1789-2015
- ii. The product utilize driver and LED load 1 and 2 is compliant with CEC title 24 JA8 and IEEE PAR 1789-2015 Recommended Practice 1 in the dimming range from 5mA to 150mA.

**Dimming Method**

In the range of 200~1500mA, the current operates in continuous mode;  
In the range of 0~200mA, the current operates in PWM dimming mode, and the PWM frequency 3.6KHZ.

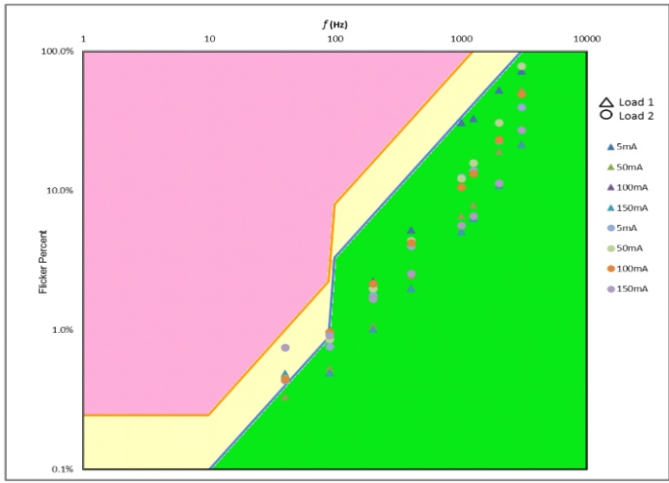

**Programmable Performance**

**Touch Setting**

Program driver's parameters without cable.

[Download Software](#)

**Smartkey Network**

Program driver's parameters through cable programming. Update driver's firmware.

[Download Software](#)

**1mA Current Programmable Step**

**Default Factory Setting**

Touch Setting V1.1.1.12

Load Save Read Write Setting

**Current**

Channel 1: 350 mA

Channel 2: 350 mA

**General Setting**

Dimming Strategy: Tunable White

Dimming Curve: Logarithmic

Minimum Dimming Level: 0.1 %

NTC: 85

AUX Power: Enable

Input 0-10V Voltage Range: Upper 10.0 V, Lower 1.0 V

Physical CCT: Warmest 2700 K, Coolest 6500 K


Logical CCT: Warmest 2700 K, Coolest 6500 K

Fade Time: 300 ms

**Inrush Current**

**Ipeak & Time**

Input Voltage	Inrush Current Ipeak	Inrush Current Time, measured 50% of Ipeak
100VAC	3.5A	35us
220VAC	8A	35us
277VAC	9A	40us

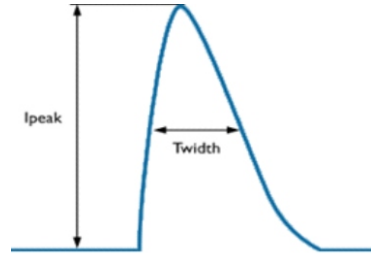


**Automaitc Circuit Breakers**


ACB Type	B10	B13	B16	B20	C10	C13	C16	C20
Number of LED Drivers @rated load	15	19	24	30	20	26	32	40

■ **Curve**


■ **Derating Curve**

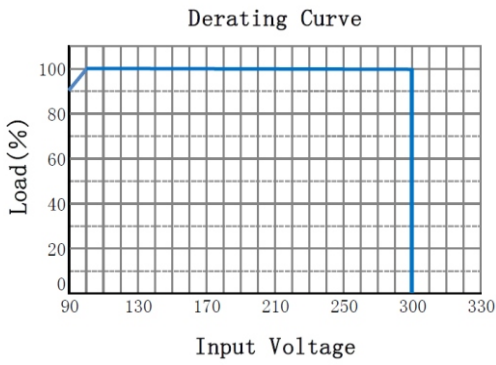


■ **Derating Curve**

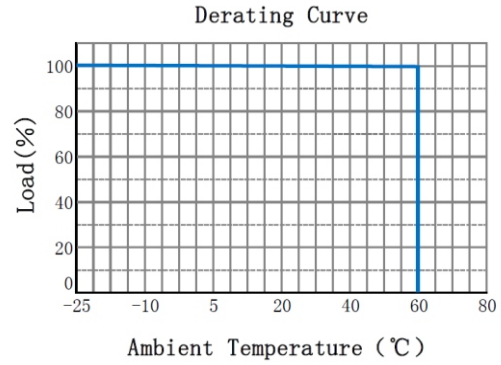


■ **V/I Curve**

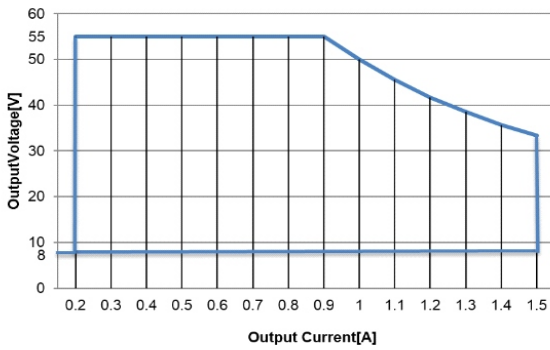

■ **Lifetime Vs Tc**

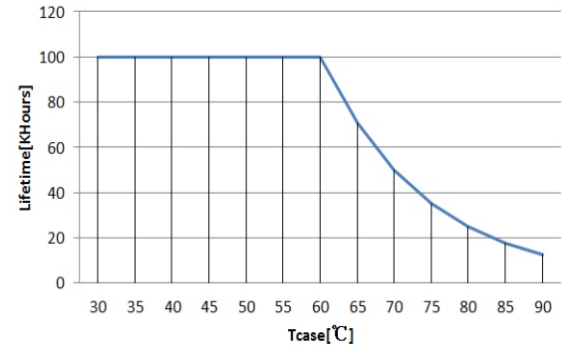


■ **Dimming Curve**

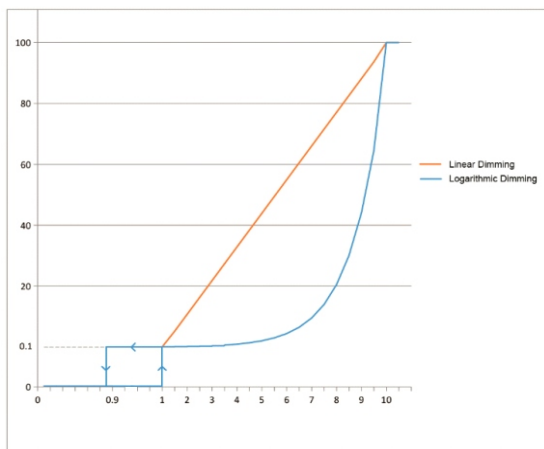


■ **Curve**


■ **PF VS Load Curve**

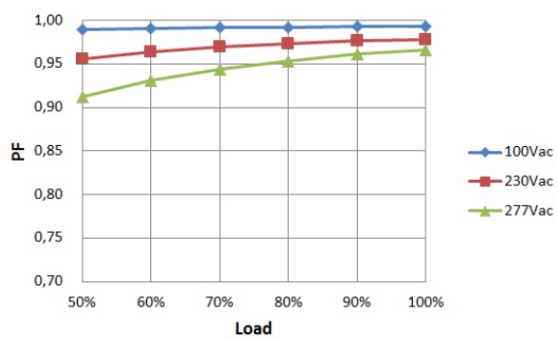

■ **THD VS Load Curve**

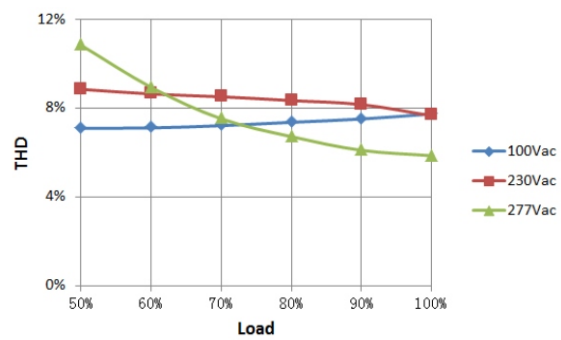


■ **Efficiency VS Load Curve**

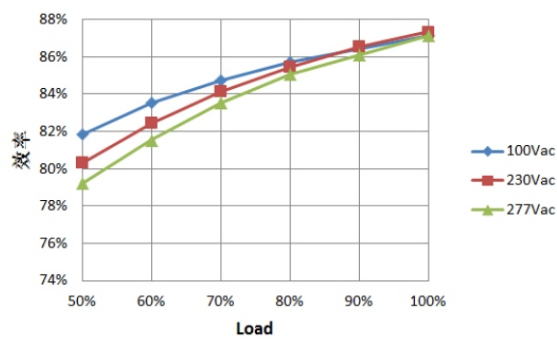


■ **Mechanical Specification**

■ **Dimensions (Unit: mm)**

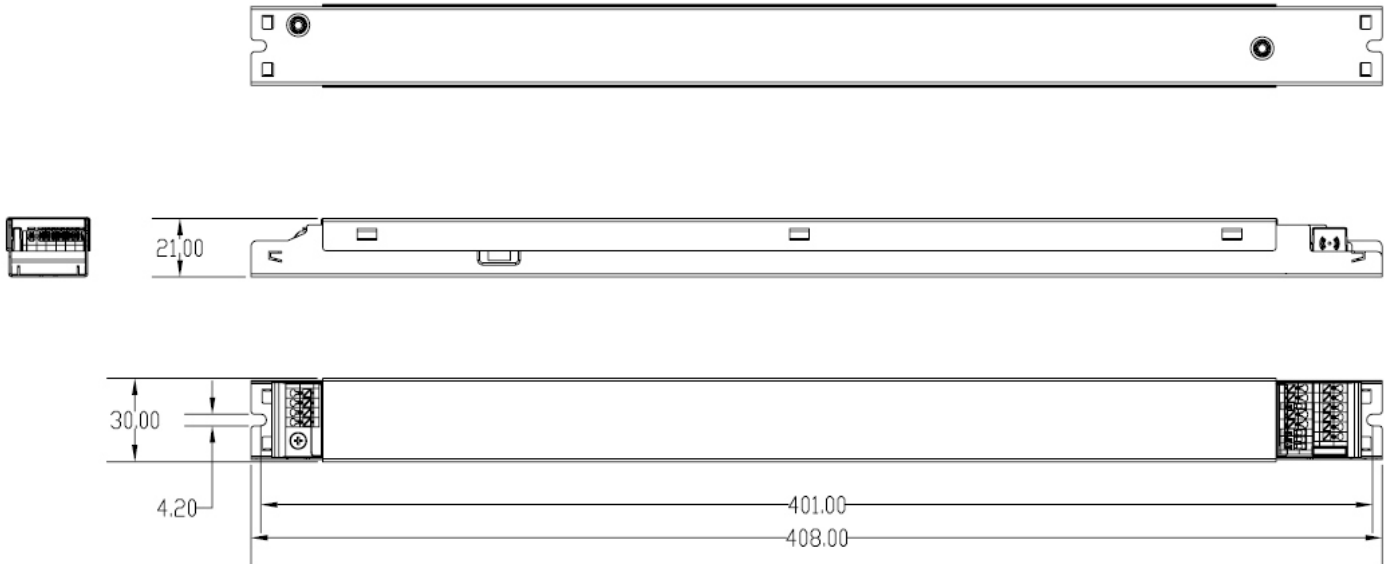

■ **Ports**

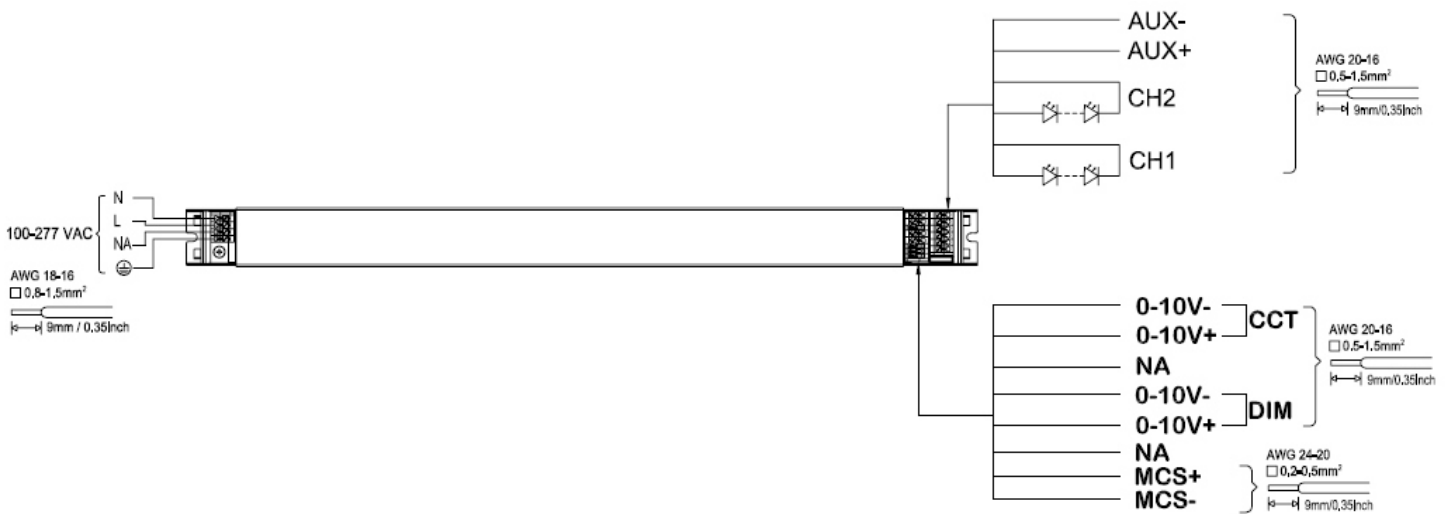

!These terminals are intended for both solid and stranded wire.

!To remove wire, insert screwdriver into slot.

RoHS Compliance:

Our products comply with the European Directive 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Date of release: 2019-07-02, Version A0