


4

3

DWG NO. 1000071 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

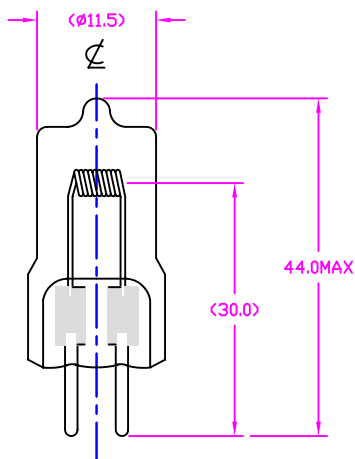

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	50 W
TOTAL LUMEN	1600 Lm
COLOR TEMP.	3400 K
BASE TYPE	G6.35
AVERAGE LIFE	50 HRS
FILAMENT TYPE	CBar6
BURN POSITION	BD/Hor

NEXT ASSY	USED ON
	APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
		APPROVALS			
		DRAWN	R.AMPARO	08/20/99	TITLE BRL JC12V-50W
		CHKD	D.GILCZYNSKI	09/20/99	
		ENGR			
MATERIAL COMPOSITE		MFG			
FINISH		QUAL			SIZE B
		DSGN ACTVY			CODE IDENT NO. BRL
		GOV'T ACTVY			DWG NO. 1000071
		SCALE	NONE	WEIGHT	SHEET 1 OF 1